
MAGUS DATA TECHNOLOGY, INC. DX386 EDITION 1.0

80386DX **Processor Processor Speed** 33/40MHz C & T **Chip Set** Max. Onboard DRAM 32MB Cache 64KB **BIOS** Phoenix

Dimensions 330mm x 218mm

I/O Options None

NPU Options 80387DX/3167

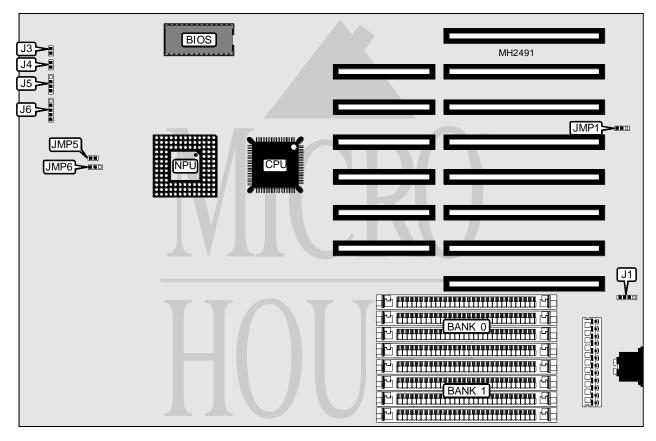

CONNECTIONS					
Purpose	Location	Purpose	Location		
External battery	J1	Speaker	J5		
Turbo LED	J3	Power LED & keylock	J6		
Reset switch	J4				

Continued on next page. . .

MAGUS DATA TECHNOLOGY, INC. DX386 EDITION 1.0

. . . continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í Power good signal detect from power supply	JMP1	pins 2 & 3 closed		
Power good signal detect from board	JMP1	pins 1 & 2 closed		
í Cache enabled	JMP5	Closed		
Cache disabled	JMP5	Open		
í Monitor type select CGA	JMP6	pins 1 & 2 closed		
Monitor type select EGA/VGA	JMP6	pins 2 & 3 closed		

	DRAM CONFIGURATION	
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

		CACHE CONFIGURATION	
I	Note:	This board is installed with 64KB. The location is unidentified.	