


UNIDENTIFIED LM403

Processor 80286
Processor Speed 16/20MHz
Chip Set Acer
Max. Onboard DRAM 4MB
Cache None
BIOS AMI
Dimensions 240mm x 218mm
I/O Options None
NPU Options 80287

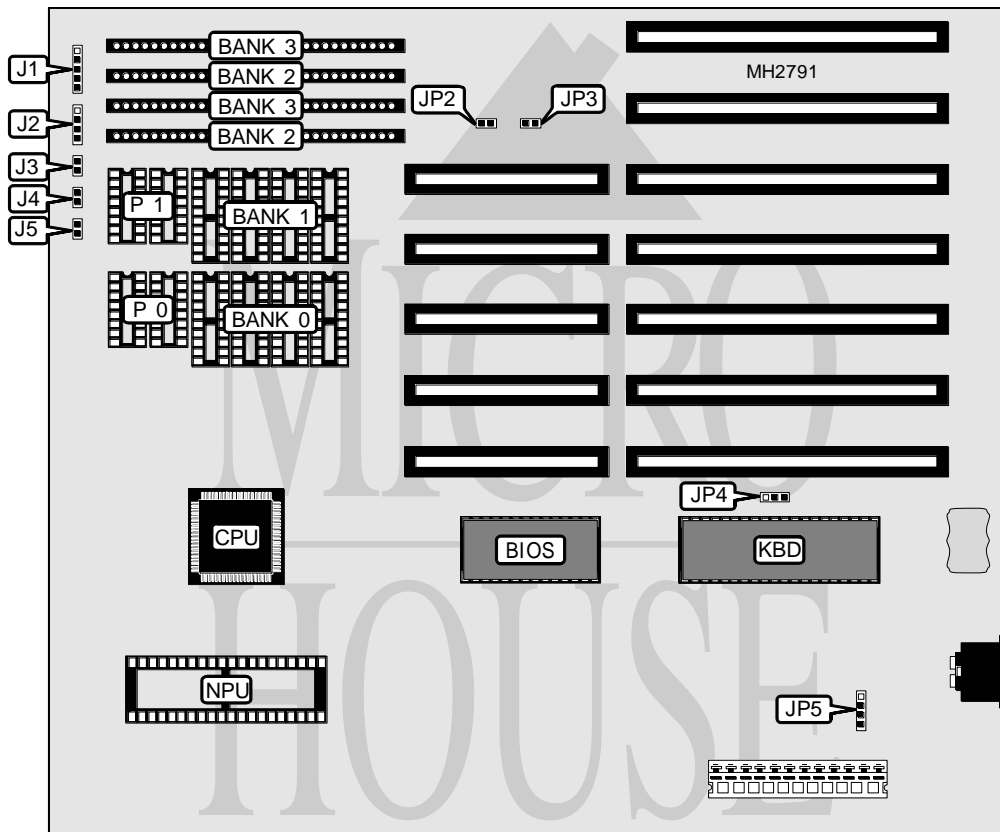

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J1	Reset switch	J4
Speaker	J2	Turbo switch	J5
Turbo LED	J3	External battery	JP5

Continued on next page. . .

UNIDENTIFIED

LM403

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í I/O bus speed select ATCLK/4	JP2	Open
I/O bus speed select ATCLK/2	JP2	Closed
í Parity disabled	JP3	Closed
Parity enabled	JP3	Open
í Monitor type select monochrome	JP4	pins 1 & 2 closed
Monitor type select color	JP4	pins 2 & 3 closed

DRAM CONFIGURATION						
Size	Bank 0	Parity 0	Bank 1	Parity 1	Bank 2	Bank 3
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
512KB	NONE	NONE	NONE	NONE	(2) 256K x 9	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
1MB	NONE	NONE	NONE	NONE	(2) 256K x 9	(2) 256K x 9
2MB	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9