


SOTA TECHNOLOGY, INC.

SOTA EXPRESS/386

Processor	80386SX
Processor Speed	16MHz
Chip Set	None
Max. Onboard DRAM	None
Cache	None
BIOS	None
Dimensions	75mm x 50mm
I/O Options	None
NPU Options	80387SX

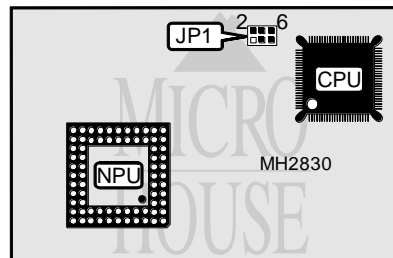

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
Express/386 installed in AT compatible system	JP1	pins 1 & 2 closed
Express/386 installed in MCA compatible system	JP1	pins 5 & 6 closed

MISCELLANEOUS TECHNICAL NOTE

Note: If motherboard has an 80287 coprocessor installed, remove before installing Express/386.