


# POSITIVE CORPORATION P C 3 3 3 B

**Processor** 80386SX  
**Processor Speed** 33MHz  
**Chip Set** SIS  
**Max. Onboard DRAM** 16MB (8MB on external memory card)  
**Cache** 128KB  
**BIOS** Unidentified  
**Dimensions** 417mm x 410mm  
**I/O Options** External memory card  
**NPU Options** 80387SX/3167

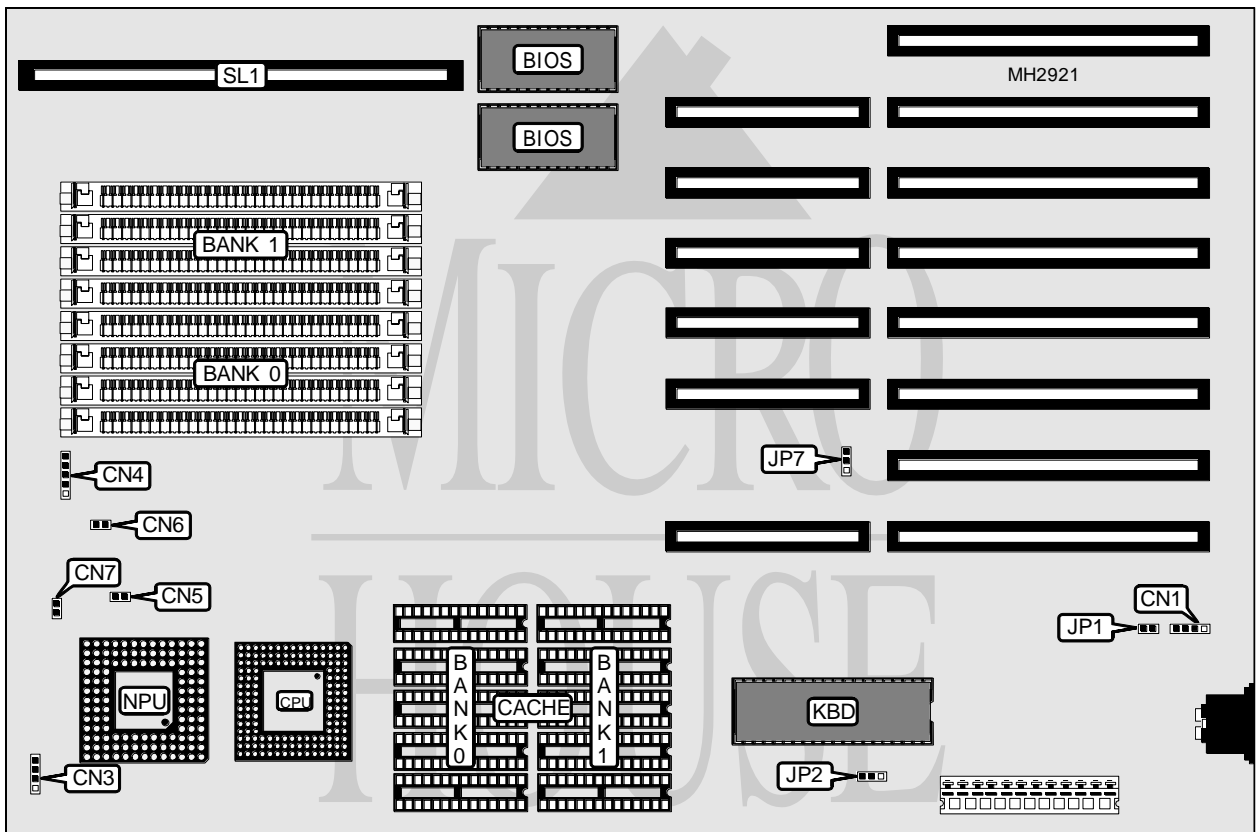

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	CN1	Turbo switch	CN6
Speaker	CN3	Reset switch	CN7
Power LED & keylock	CN4	32-bit external memory card	SL1
Turbo LED	CN5		

Continued on next page. . .

# POSITIVE CORPORATION

## PC333B

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Battery type select internal	JP1	Open
Battery type select external	JP1	Closed
í Monitor type select monochrome	JP2	pins 1 & 2 closed
Monitor type select color	JP2	pins 2 & 3 closed
í NPU disabled	JP7	pins 2 & 3 closed
NPU enabled	JP7	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9