


# UNIDENTIFIED

## MB-386-158

<b>Processor</b>	80386SX
<b>Processor Speed</b>	20MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	16MB (8MB on external memory card)
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 220mm
<b>I/O Options</b>	External memory card
<b>NPU Options</b>	80387SX/1167

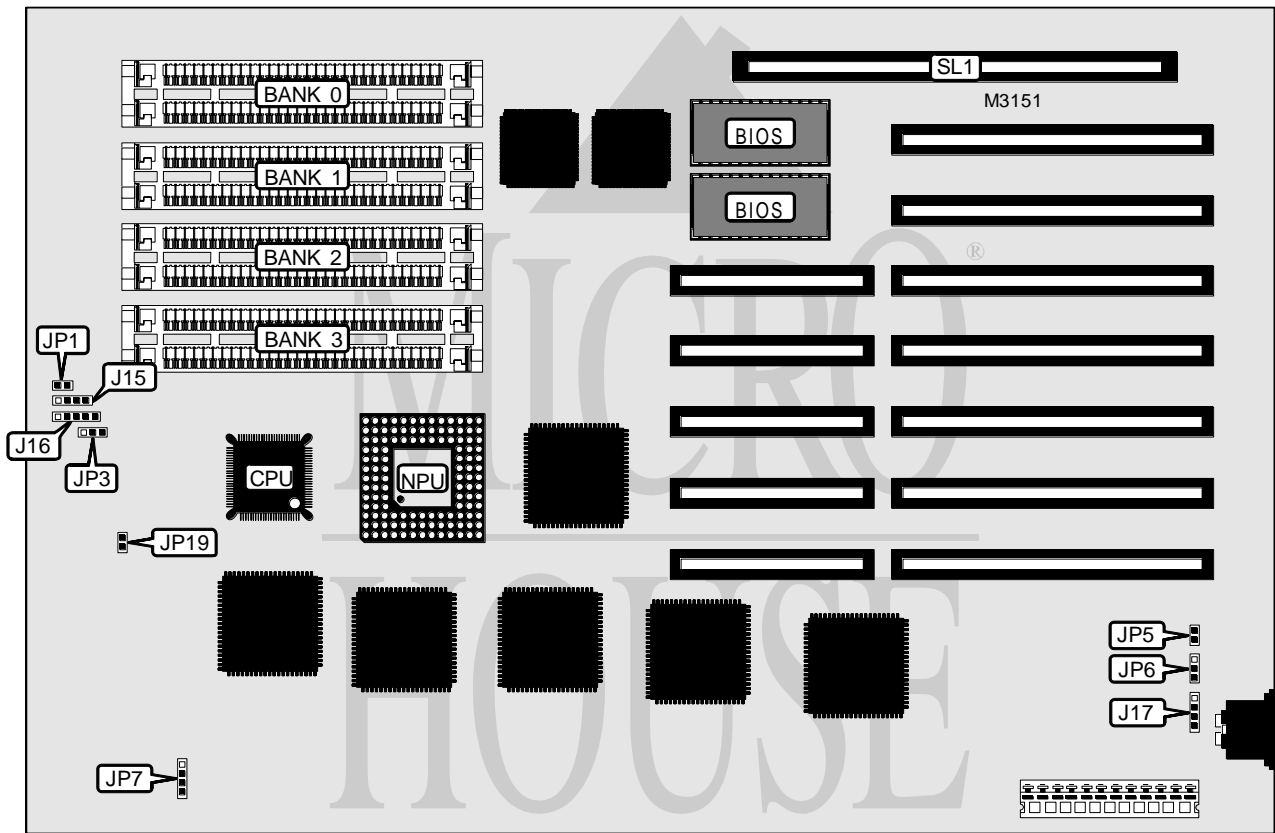

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J15	Reset switch	JP1
Power LED & keylock	J16	Turbo LED	JP7
External battery	J17	External memory card	SL1

Continued on next page . . .

# UNIDENTIFIED

## MB - 386 - 158

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Monitor type select monochrome	JP5	Open
Monitor type select CGA/EGA/VGA	JP5	Closed
í Battery type select internal	JP6	Pins 1 & 2 closed
Battery type select external	JP6	Pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	None	None
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
4MB	(2) 1M x 9	(2) 1M x 9	None	None
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9

NPU CONFIGURATION		
Setting	JP3	JP19
í Disabled	Pins 1 & 2 closed	Closed
Enabled	Pins 2 & 3 closed	Open