


# UNIDENTIFIED G E M - 1 0

<b>Processor</b>	8088
<b>Processor Speed</b>	4/7/10MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	640KB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	220mm x 160mm
<b>I/O Options</b>	None
<b>NPU Options</b>	8087

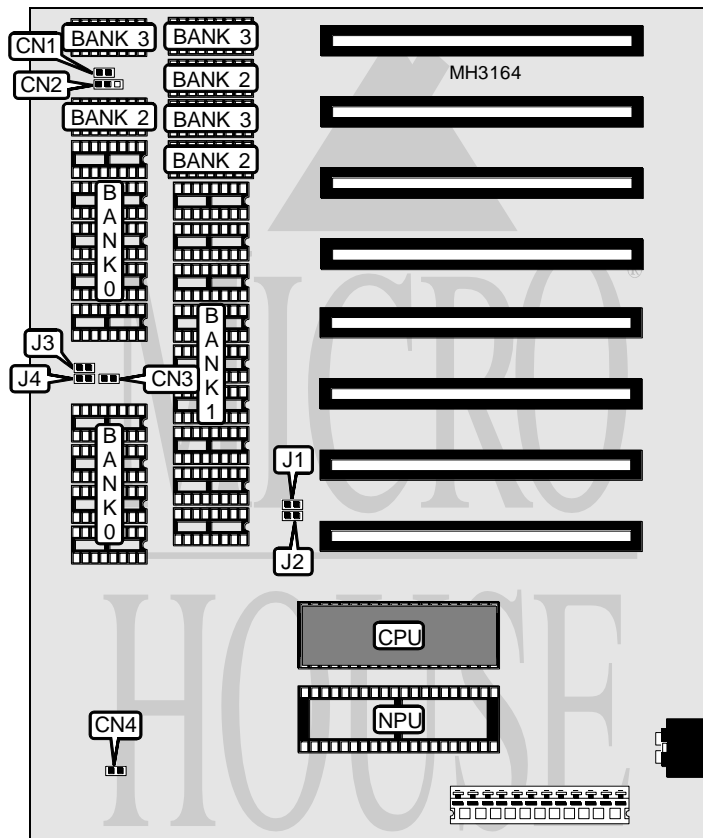

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	CN1	Reset switch	CN3
Turbo LED	CN2	Keylock	CN4

Continued on next page. . .

# UNIDENTIFIED

## GEM - 10

... continued from previous page

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256KB	(9) 41256	NONE	NONE	NONE
512KB	(9) 41256	(9) 41256	NONE	NONE
576KB	(9) 41256	(9) 41256	(2) 4464 & (1) 4164	NONE
640KB	(9) 41256	(9) 41256	(2) 4464 & (1) 4164	(2) 4464 & (1) 4164

BIOS CONFIGURATION		
Type	J1	J2
27C64/27C128	Open	Open
27C256	Open	Closed
27C512	Closed	Closed

VIDEO CONFIGURATION		
Setting	J3	J4
None	Closed	Closed
80 x 25 color	Closed	Open
40 x 25 color	Open	Closed
Monochrome/color	Open	Open