


# J-MARK COMPUTER CORPORATION

## 386 - 25

<b>Processor</b>	AM386/80386 (exact location unidentified)
<b>Processor Speed</b>	25MHz
<b>Chip Set</b>	OPTI
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	16MB ( 8MB on external card)
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	External memory card
<b>NPU Options</b>	80387/3167

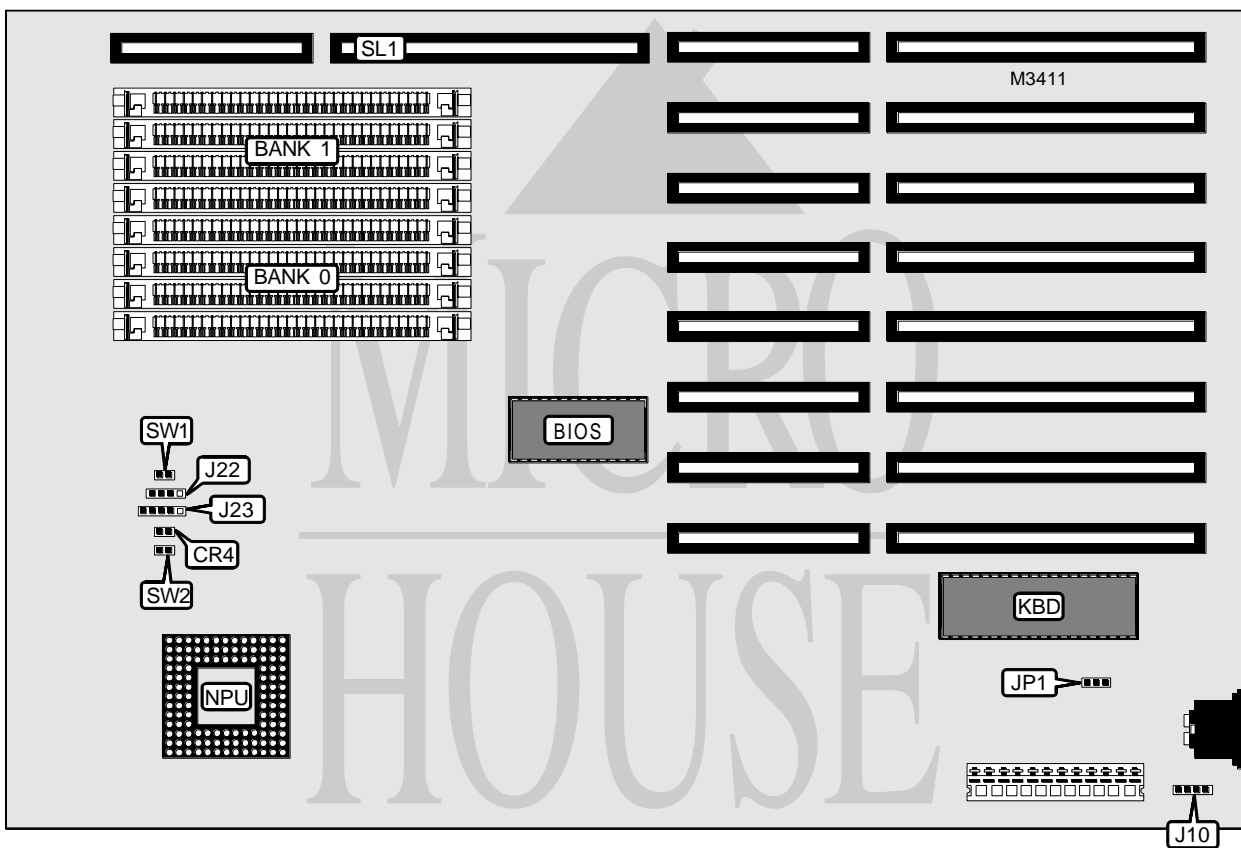

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	CR4	External memory card	SL1
External battery	J10	Reset switch	SW1
Speaker	J22	Turbo switch	SW2
Power LED & keylock	J23		

Continued on next page. . .


# J-MARK COMPUTER CORPORATION

## 386-25

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Monitor type select color	JP1	Pins 1 & 2 closed
Monitor type select monochrome	JP1	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9

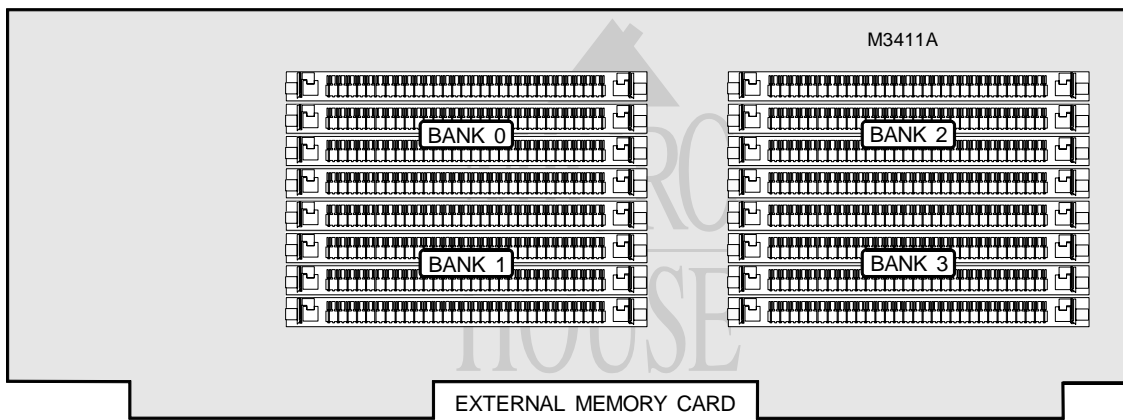

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	None	None	None
2MB	(4) 256K x 9	(4) 256K x 9	None	None
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	None
4MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None	None	None
5MB	(4) 256K x 9	(4) 1M x 9	None	None
6MB	(4) 1M x 9	(4) 256K x 9	(4) 256K x 9	None
6MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	None
6MB	(4) 256K x 9	(4) 1M x 9	(4) 256K x 9	None
7MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	(4) 256K x 9
7MB	(4) 256K x 9	(4) 1M x 9	(4) 256K x 9	(4) 256K x 9
7MB	(4) 1M x 9	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9

Continued on next page...

# J-MARK COMPUTER CORPORATION

## 386-25

... continued from previous page

DRAM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(4) 1M x 9	(4) 1M x 9	None	None
9MB	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9	None
9MB	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9	None
9MB	(4) 1M x 9	(4) 256K x 9	(4) 1M x 9	None
10MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9
10MB	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9
10MB	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9	(4) 256K x 9
10MB	(4) 1M x 9	(4) 256K x 9	(4) 1M x 9	(4) 256K x 9
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	None
13MB	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
13MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9
13MB	(4) 1M x 9	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9

Note: If this board has 16MB installed, the on board memory is disabled.