


CLUB AMERICAN TECHNOLOGIES CLUB 386 MODEL 320SX

Processor	80386SX
Processor Speed	20MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	8MB
Maximum Video Memory	None
Cache	64KB (location unidentified)
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

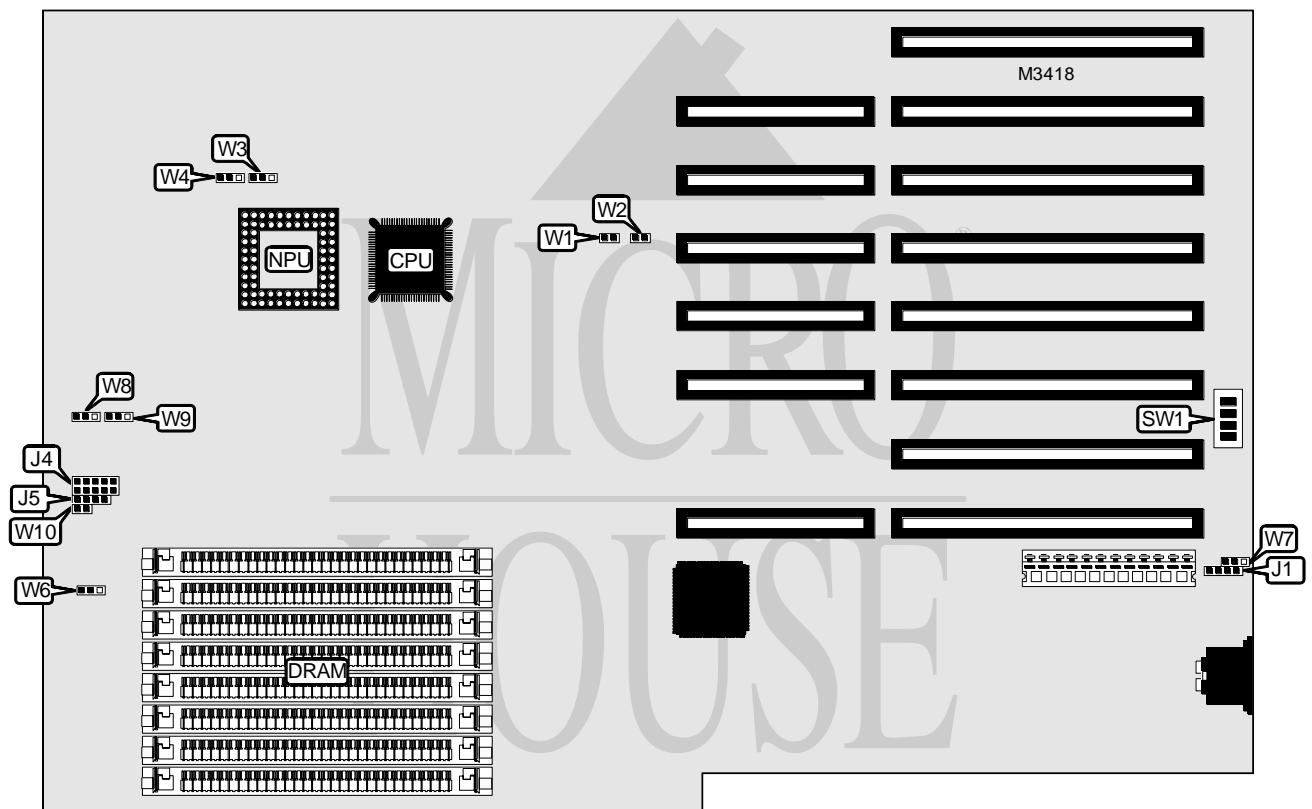

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Speaker	J5
Front panel connector	J4		

Continued on next page. . .

CLUB AMERICAN TECHNOLOGIES

CLUB 386 MODEL 320SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	W1	Unidentified
í Factory configured - do not alter	W2	Unidentified
í 8-bit cycle wait state select 5 wait states	W3	Pins 1 & 2 closed
8-bit cycle wait state select 4 wait state	W3	Pins 2 & 3 closed
í 16-bit cycle wait state select 2 wait states	W4	Pins 1 & 2 closed
16-bit cycle wait state select 1 wait states	W4	Pins 2 & 3 closed
Monitor type select color	W7	Pins 2 & 3 closed
Monitor type select monochrome	W7	Pins 1 & 2 closed
Speaker enabled	W10	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	None	None
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	None	None	None
4MB	(2) 1M x 9	(2) 1M x 9	None	None
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	None
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9

Note: The location of Banks 0, 1, 2, & 3 are unidentified.

DRAM JUMPER/SWITCH CONFIGURATION						
Size	W8	W9	SW1/1	SW1/2	SW1/3	SW1/4
1MB	1 & 2	1 & 2	On	Off	On	On
2MB	1 & 2	1 & 2	On	Off	On	Off
2MB	2 & 3	2 & 3	Off	On	On	On
4MB	2 & 3	2 & 3	Off	On	Off	On
6MB	2 & 3	2 & 3	Off	On	Off	Off
8MB	2 & 3	2 & 3	Off	Off	Off	Off

Note: Pins designated should be in the closed position.

DRAM TYPE CONFIGURATION	
Type	W6
Low only	Pins 2 & 3 closed
í High and low	Pins 1 & 2 closed
High only	Open

CACHE CONFIGURATION
Note: The location of the 64KB is unidentified.