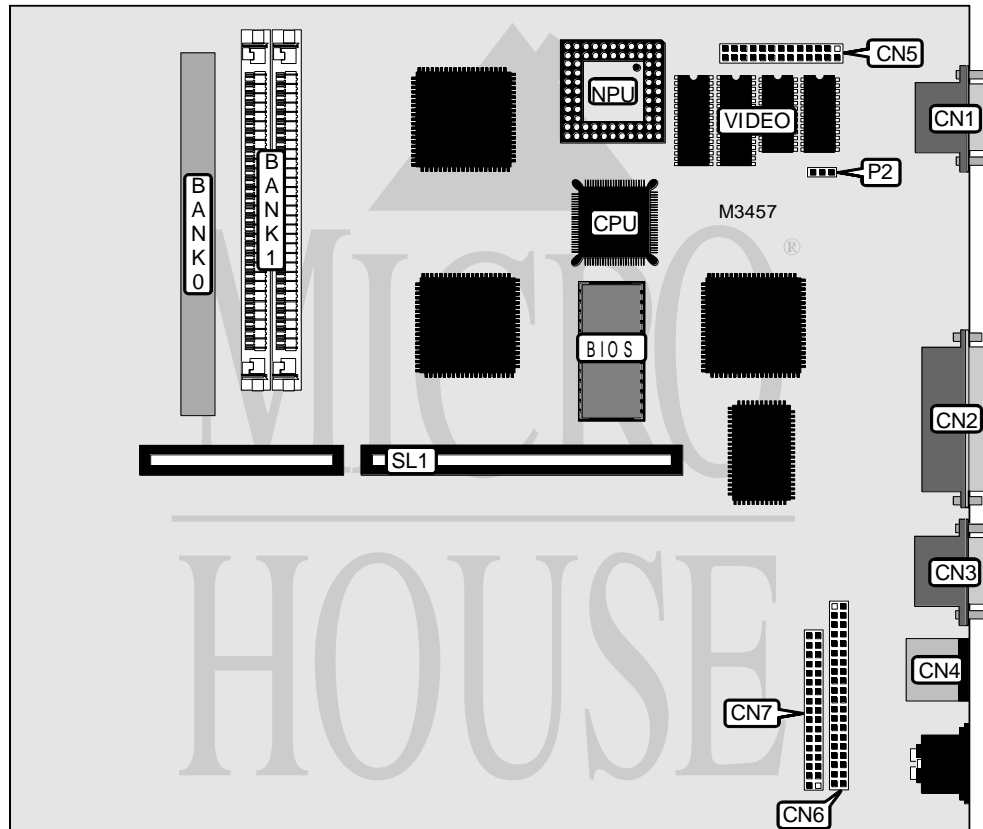


## OLIVETTI

M300-02 (BA013)

M300-02F (BA013)

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16MHz (M300-02) 25MHz (M300-02F)
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Western Digital
<b>Maximum Onboard Memory</b>	10MB
<b>Maximum Video Memory</b>	Unidentified
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial port, feature connector, VGA port, riser slot
<b>NPU Options</b>	80387SX

*Continued on next page . . .*

**OLIVETTI**

**M300-02 (BA013)**

**M300-02F (BA013)**

... continued from previous page


CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	Feature connector	CN5
Parallel port	CN2	IDE interface	CN6
Serial port	CN3	Floppy drive interface	CN7
PS/2 mouse port	CN4	Riser slot	SL1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Password enabled	P2	Pins 2 & 3 closed
Password disabled	P2	Pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	2MB	None
4MB	2MB	(2) 1M x 9
10MB	2MB	(2) 4M x 9

Note: Bank 0 is factory installed and is not configurable.

VIDEO MEMORY CONFIGURATION
Note: The size and chip type of the video memory is unidentified.

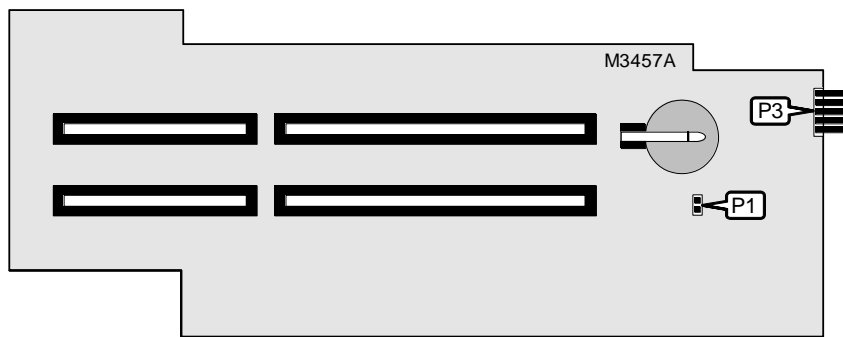

EXPANSION CARD

CONNECTIONS	
Purpose	Location
Console connector	P3

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Battery installed	P1	Closed
Battery not installed	P1	Open