AT & T MODEL 6386/SX WGS (FM-0589-05)


Processor 80386SX (exact location unidentified)

Processor Speed 16MHz **Chip Set** Unidentified **Video Chip Set** None **Maximum Onboard Memory** 8MB **Maximum Video Memory** None Cache None **BIOS** Unidentified **Dimensions** 355mm x 304mm

I/O Options Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports

(2), VGA port

NPU Options 80387SX

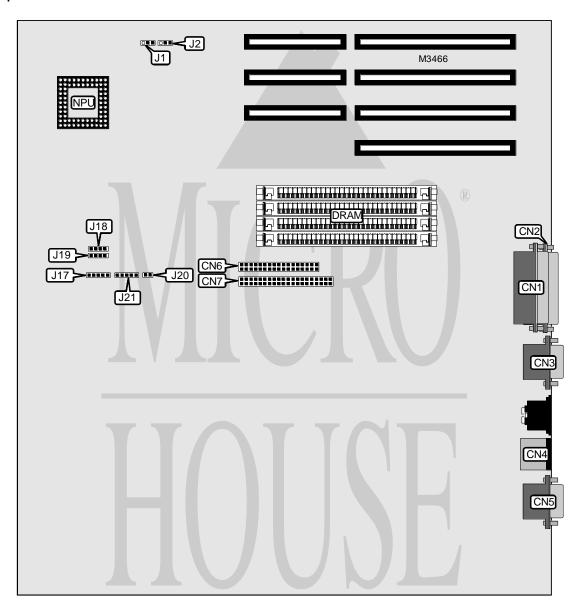

Continued on next page. . .

AT & T MODEL 6386/SX WGS (FM-0589-05)

. . . continued from previous page

CONNECTIONS				
Purpose	Location	Purpose	Location	
Parallel port	CN1	IDE interface	CN7	
Serial port	CN2	Power LED & keylock	J17	
Serial port	CN3	IDE interface LED	J18	
PS/2 mouse port	CN4	External battery	J19	
VGA port	CN5	Reset switch	J20	
Floppy drive interface	CN6	Speaker	J21	

USER CONFIGURABLE SETTINGS				
Function	Label	Position		
Password normal operation	J1	Pins 1 & 2 closed		
Password clear	J1	Pins 2 & 3 closed		
On board video enabled	J2	Pins 2 & 3 closed		
On board video disabled	J2	Pins 1 & 2 closed		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1		
2MB	(2) 1M x 9	None		
4MB	(2) 1M x 9	(2) 1M x 9		
8MB	(2) 4M x 9	None		
Note: The location of banks 0 & 1 are unidentified.				