
## NCR CORPORATION MODEL 3386-6XXX PC925/PC386

80386 **Processor Processor Speed** 25MHz **Chip Set** Unidentified **Video Chip Set** None

**Maximum Onboard Memory** 16MB (8MB on external memory card)

**Maximum Video Memory** None Cache None **BIOS** Unidentified **Dimensions** 355mm x 304mm I/O Options External memory card

**NPU Options** 80387

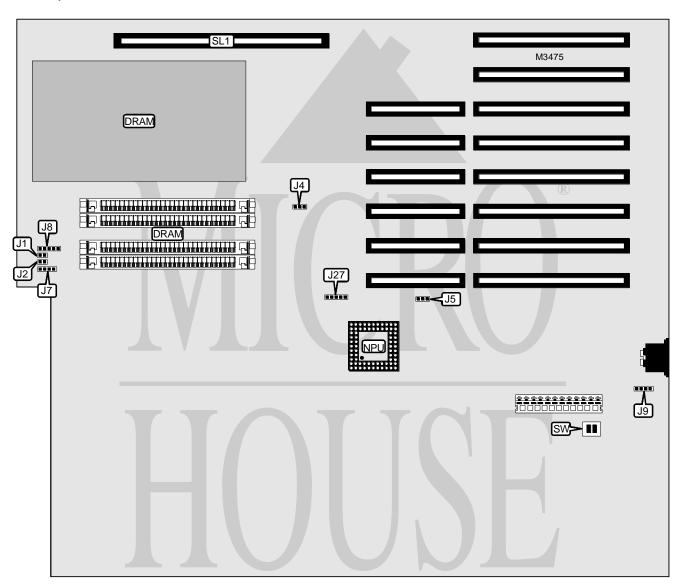

Continued on next page. . .

## NCR CORPORATION MODEL 3386-6XXX PC925/PC386

. . . continued from previous page

CONNECTIONS					
Purpose	Location	Purpose	Location		
Turbo LED	J1	External battery	J9		
Speaker	J7	External memory card	SL1		
Power LED & keylock	J8				

USER CONFIGURABLE SETTINGS				
Function	Label	Position		
Jumper not used	J2	N/A		
í BIOS type select 27256	J4	Pins 1 & 2 closed		
BIOS type select 27128	J4	Pins 2 & 3 closed		
í NPU installed	J5	Pins 1 & 2 closed		
NPU not installed	J5	Pins 2 & 3 closed		
í Manufacturing diagnostics loop disabled	SW/1	Off		
Manufacturing diagnostics loop enabled	SW/1	On		
Monitor type select color	SW/2	On		
Monitor type select monochrome	SW/2	Off		

DRAM CONFIGURATION					
Size	Bank 0	Bank 1			
4MB	411000	None			
8MB	411000	(4) 1M x 9			
Note: The location of banks 0 & 1 are unidentified. The number of chips for bank 0 are unidentified.					

DRAM JUMPER CONFIGURATION			
Size	J27		
4MB	Pins 1 & 2, 3 & 4 closed		
8MB	Pins 2 & 3, 4 & 5 closed		

MISCELLANEOUS TECHINCAL NOTE			
The location of all pin 1s are unidentified.			