
80286 **Processor Processor Speed** 6/8MHz **Chip Set** Unidentified **Video Chip Set** None

Maximum Onboard Memory 14MB (on external memory card)

Maximum Video Memory None Cache None **BIOS** Unidentified **Dimensions** 355mm x 304mm I/O Options External memory card

NPU Options 80287

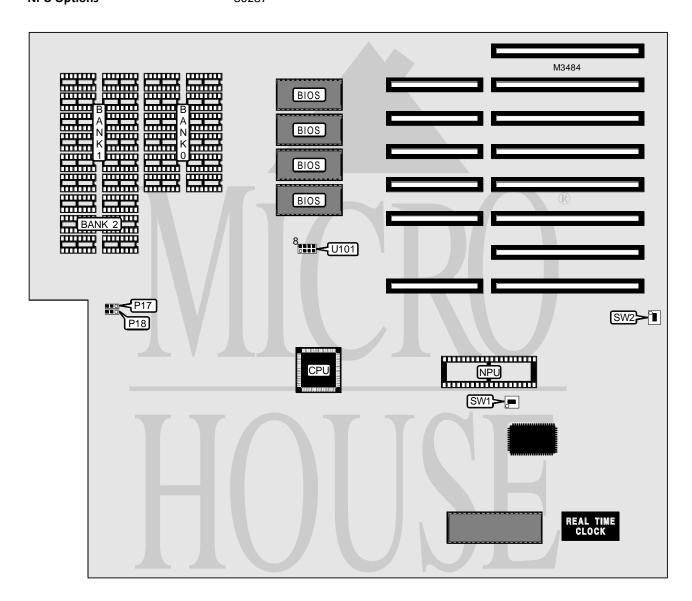


Continued on next page. . .

. . . continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Label	Position		
í Monitor type select color	SW1	On		
Monitor type select monochrome	SW1	Off		
í Power on frequency speed select 8MHz	SW2	On		
Power on frequency speed select 6MHz	SW2	Off		
í Number of BIOS installed 2 installed	U101	Pins 1 & 8, 2 & 7 closed		
Number of BIOS installed 4 installed	U101	Pins 3 & 6, 4 & 5 closed		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	
256KB	256KB	None	None	
512KB	256KB	256KB	None	
640KB	256KB	256KB	128KB	
Note: The size of the DRAM chips are unidentified.				

DRAM JUMPER CONFIGURATION				
Size	P17	P18		
256KB	Pins 1 & 2 closed	Pins 1 & 2 closed		
512KB	Pins 1 & 2 closed	Pins 2 & 3 closed		
640KB	Pins 2 & 3 closed	Pins 2 & 3 closed		

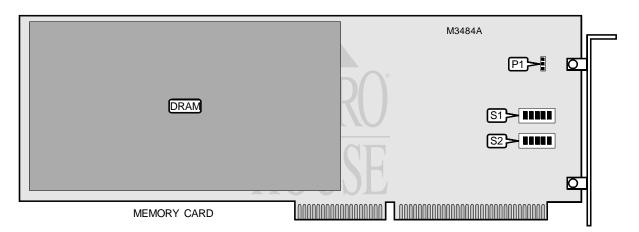

USER CONFIGURABLE SETTINGS				
Function	Label	Position		
Jumper information unavailable	P1	Unidentified		

Continued on next page. . .

. . . continued from previous page

DRAM CONFIGURATION

Note: The size of the DRAM chips are unidentified.

DRAM SWITCH CONFIGURATION					
Size	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5
None	On	On	On	Off	On
0.5MB	On	On	On	Off	Off
1.0MB	On	On	Off	On	On
1.5MB	On	On	Off	On	Off
2.0MB	On	On	Off	Off	On
2.5MB	On	On	Off	Off	Off
3.0MB	On	Off	On	On	On
3.5MB	On	Off	On	On	Off
4.0MB	On	Off	On	Off	On
4.5MB	On	Off	On	Off	Off
5.0MB	On	Off	Off	On	On
5.5MB	On	Off	Off	On	Off
6.0MB	On	Off	Off	Off	On
6.5MB	On	Off	Off	Off	Off
7.0MB	Off	On	On	On	On
7.5MB	Off	On	On	On	Off
8.0MB	Off	On	On	Off	On
8.5MB	Off	On	On	Off	Off
9.0MB	Off	On	Off	On	On
9.5MB	Off	On	Off	On	Off
10.0MB	Off	On	Off	Off	On
10.5MB	Off	On	Off	Off	Off
11.0MB	Off	Off	On	On	On
11.5MB	Off	Off	On	On	Off
12.0MB	Off	Off	On	Off	On
12.5MB	Off	Off	On	Off	Off
13.0MB	Off	Off	Off	On	On
13.5MB	Off	Off	Off	On	Off
14.0MB	Off	Off	Off	Off	On

Continued on next page. . .

. . . continued from previous page

DRAM SWITCH CONFIGURATION (CON'T)					
Size	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5
None	On	On	On	Off	Off
0.5MB	On	On	Off	On	On
1.0MB	On	On	Off	On	Off
1.5MB	On	On	Off	Off	On
2.0MB	On	On	Off	Off	Off
2.5MB	On	Off	On	On	On
3.0MB	On	Off	On	On	Off
3.5MB	On	Off	On	Off	On
4.0MB	On	Off	On	Off	Off
4.5MB	On	Off	Off	On	On
5.0MB	On	Off	Off	On	Off
5.5MB	On	Off	Off	Off	On
6.0MB	On	Off	Off	Off	Off
6.5MB	Off	On	On	On	On
7.0MB	Off	On	On	On	Off
7.5MB	Off	On	On	Off	On
8.0MB	Off	On	On	Off	Off
8.5MB	Off	On	Off	On	On
9.0MB	Off	On	Off	On	Off
9.5MB	Off	On	Off	Off	On
10.0MB	Off	On	Off	Off	Off
10.5MB	Off	Off	On	On	On
11.0MB	Off	Off	On	On	Off
11.5MB	Off	Off	On	Off	On
12.0MB	Off	Off	On	Off	Off
12.5MB	Off	Off	Off	On	On
13.0MB	Off	Off	Off	On	Off
13.5MB	Off	Off	Off	Off	On
14.0MB	N/A	N/A	N/A	N/A	N/A