


# UNIDENTIFIED KMX-16/20 SCATSX (VER. 2)

|                               |               |
|-------------------------------|---------------|
| <b>Processor</b>              | 80386SX       |
| <b>Processor Speed</b>        | 20/25MHz      |
| <b>Chip Set</b>               | C & T         |
| <b>Video Chip Set</b>         | None          |
| <b>Maximum Onboard Memory</b> | 16MB          |
| <b>Maximum Video Memory</b>   | None          |
| <b>Cache</b>                  | Unidentified  |
| <b>BIOS</b>                   | C&T           |
| <b>Dimensions</b>             | 330mm x 218mm |
| <b>I/O Options</b>            | Cache slot    |
| <b>NPU Options</b>            | 80387SX/3167  |

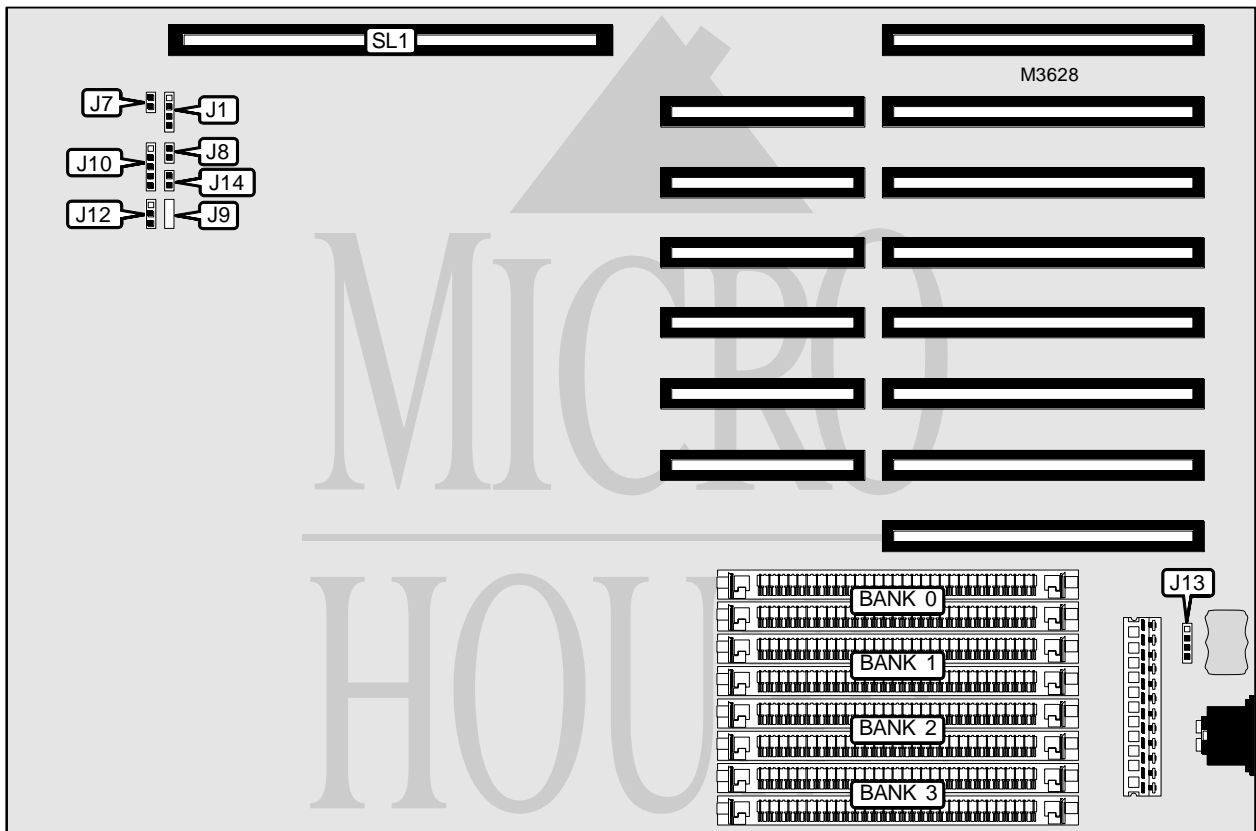

| CONNECTIONS         |          |                  |          |
|---------------------|----------|------------------|----------|
| Purpose             | Location | Purpose          | Location |
| Speaker             | J1       | External battery | J13      |
| Turbo switch        | J7       | Reset switch     | J14      |
| Turbo LED           | J8       | Cache slot       | SL1      |
| Power LED & keylock | J10      |                  |          |

Continued on next page. . .

# UNIDENTIFIED

## KMX-16/20 SCATSX (VER. 2)

... continued from previous page

| USER CONFIGURABLE SETTINGS          |       |                   |
|-------------------------------------|-------|-------------------|
| Function                            | Label | Position          |
| í Factory configured - do not alter | J9    | Unidentified      |
| Monitor type select color           | J12   | Pins 1 & 2 closed |
| Monitor type select monochrome      | J12   | Pins 2 & 3 closed |

| DRAM CONFIGURATION |              |              |              |              |
|--------------------|--------------|--------------|--------------|--------------|
| Size               | Bank 0       | Bank 1       | Bank 2       | Bank 3       |
| 512KB              | (2) 256K x 9 | None         | None         | None         |
| 640KB              | (2) 256K x 9 | (2) 64K x 9  |              |              |
| 1MB                | (2) 256K x 9 | (2) 256K x 9 | None         | None         |
| 1.5MB              | (2) 256K x 9 | (2) 256K x 9 | (2) 256K x 9 | None         |
| 2MB                | (2) 256K x 9 | (2) 256K x 9 | (2) 256K x 9 | (2) 256K x 9 |
| 2MB                | (2) 1M x 9   | None         | None         | None         |
| 2.5MB              | (2) 1M x 9   | (2) 256K x 9 | None         | None         |
| 3MB                | (2) 1M x 9   | (2) 256K x 9 | (2) 256K x 9 | (2) 256K x 9 |
| 4MB                | (2) 1M x 9   | (2) 1M x 9   | None         | None         |
| 4.5MB              | (2) 1M x 9   | (2) 1M x 9   | (2) 256K x 9 | None         |
| 5MB                | (2) 1M x 9   | (2) 1M x 9   | (2) 256K x 9 | (2) 256K x 9 |
| 6MB                | (2) 1M x 9   | (2) 1M x 9   | (2) 1M x 9   | None         |
| 6.5MB              | (2) 1M x 9   | (2) 1M x 9   | (2) 1M x 9   | (2) 256K x 9 |
| 8MB                | (2) 1M x 9   | (2) 1M x 9   | (2) 1M x 9   | (2) 1M x 9   |
| 9MB                | (2) 4M x 9   | (2) 256K x 9 | (2) 256K x 9 | None         |
| 10MB               | (2) 4M x 9   | (2) 1M x 9   | None         | None         |
| 16MB               | (2) 4M x 9   | (2) 4M x 9   | None         | None         |

| CACHE CONFIGURATION                                 |
|---|
| Note: The size of the cache module is unidentified. |