


UNIDENTIFIED P X 3 8 6 Q

Processor	80386DX
Processor Speed	25/33/40MHz
Chip Set	OPTI
Video Chip Set	None
Maximum Onboard Memory	32MB
Maximum Video Memory	None
Cache	128KB
BIOS	AMI
Dimensions	220mm x 170mm
I/O Options	None
NPU Options	80387DX

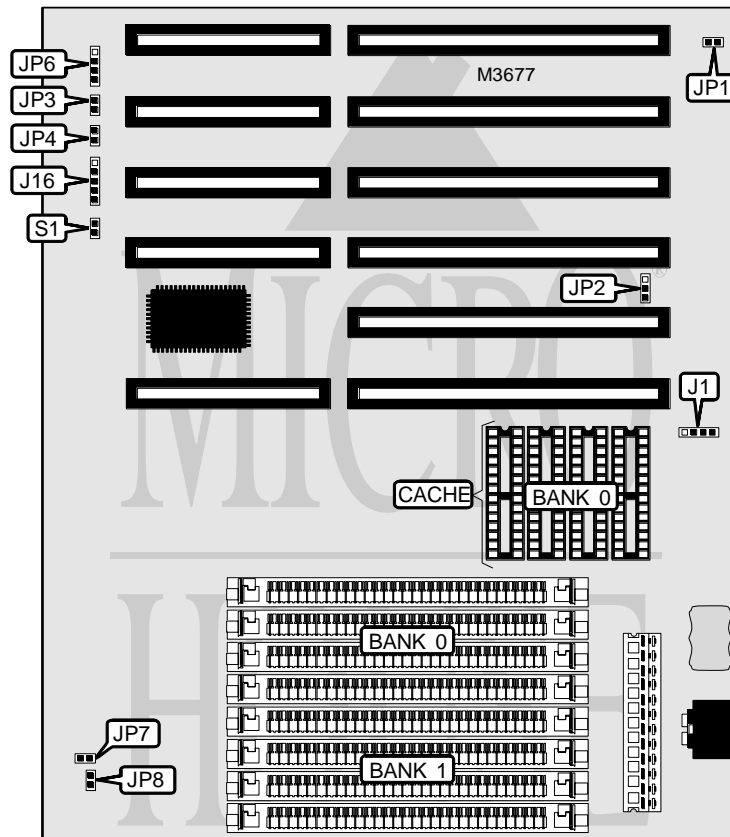

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo switch	JP4
Power LED & keylock	J16	Speaker	JP6
Turbo LED	JP3	Reset switch	S1

Continued on next page. . .

UNIDENTIFIED
PX386Q

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open
í Battery type select internal	JP2	Pins 2 & 3 closed
Battery type select external	JP2	Open
CMOS memory clear	JP2	Pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION	
Size	Bank 0
128KB	(4) 32K x 8

CPU SPEED SELECTION		
Speed	JP7	JP8
25MHz	Closed	Open
33MHz	Open	Closed
40MHz	Open	Open