


UNIDENTIFIED

A 3 8 6 S X

Processor	80386SX
Processor Speed	16/20/25MHz
Chip Set	Headland
Video Chip Set	None
Maximum Onboard Memory	8MB
Maximum Video Memory	None
Cache	None
BIOS	AMI
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	80387SX

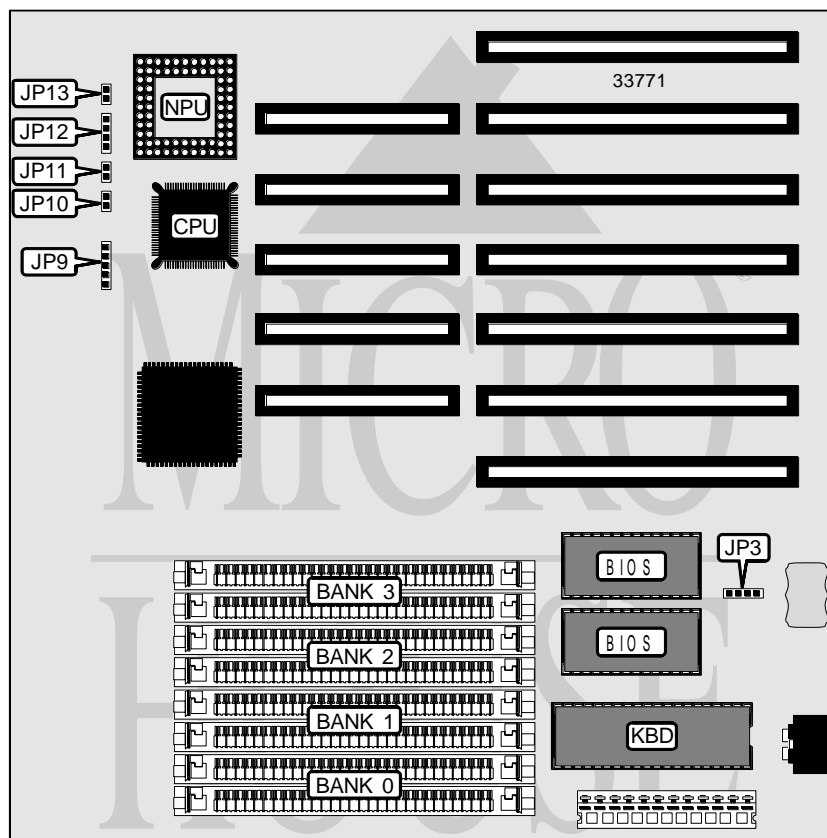

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP3	Turbo switch	JP11
Power LED & keylock	JP9	Speaker	JP12
Turbo LED	JP10	Reset switch	JP13

Continued on next page . . .

UNIDENTIFIED A386SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Turbo enabled	JP11	Open
Turbo speed select through keyboard	JP11	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	None	None	None
1MB	(2) 256K x 9	(2) 256K x 9	None	None
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	None
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	None	None	None
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	None
4MB	(2) 1M x 9	(2) 1M x 9	None	None
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	None
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	None
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9