
CORDATA TECHNOLOGIES ATP

80286 **Processor Processor Speed** 8MHz **Chip Set** Unidentified **Video Chip Set** None **Maximum Onboard Memory** 640KB **Maximum Video Memory** None Cache None BIOS Unidentified **Dimensions** 254mm x 218mm I/O Options Floppy drive interface

NPU Options 80287

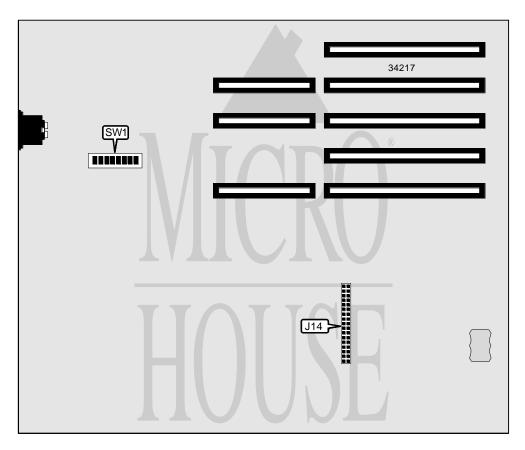

CONNECTIONS		
Purpose	Location	
Floppy drive interface	J14	

Continued on next page. . .

CORDATA TECHNOLOGIES ATP

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Floppy drives installed 1 drive	SW1/1	On
Floppy drives installed 2 drives	SW1/1	Off
í Floppy drive A density select quad	SW1/2	Off
Floppy drive A density select double	SW1/2	On
í Floppy drive B density select quad	SW1/3	Off
Floppy drive B density select double	SW1/3	On
í Monitor type select color	SW1/4	On
Monitor type select monochrome	SW1/4	Off
í Factory configured - do not alter	SW1/5	N/A
í Factory configured - do not alter	SW1/6	N/A
í Factory configured - do not alter	SW1/7	N/A
í Factory configured - do not alter	SW1/8	N/A

DRAM CONFIGURATION

Note: Board is installed with 512KB memory. It can be upgraded to 640KB. The location and chip sizes are unidentified.