


UNIDENTIFIED 486 MOTHER BOARD

Processor	80486DX/80486DX2
Processor Speed	25/33/50(internal)/66(internal)MHz
Chip Set	OPTI
Video Chip Set	None
Maximum Onboard Memory	32MB
Maximum Video Memory	None
Cache	64/256KB
BIOS	AMI
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	None

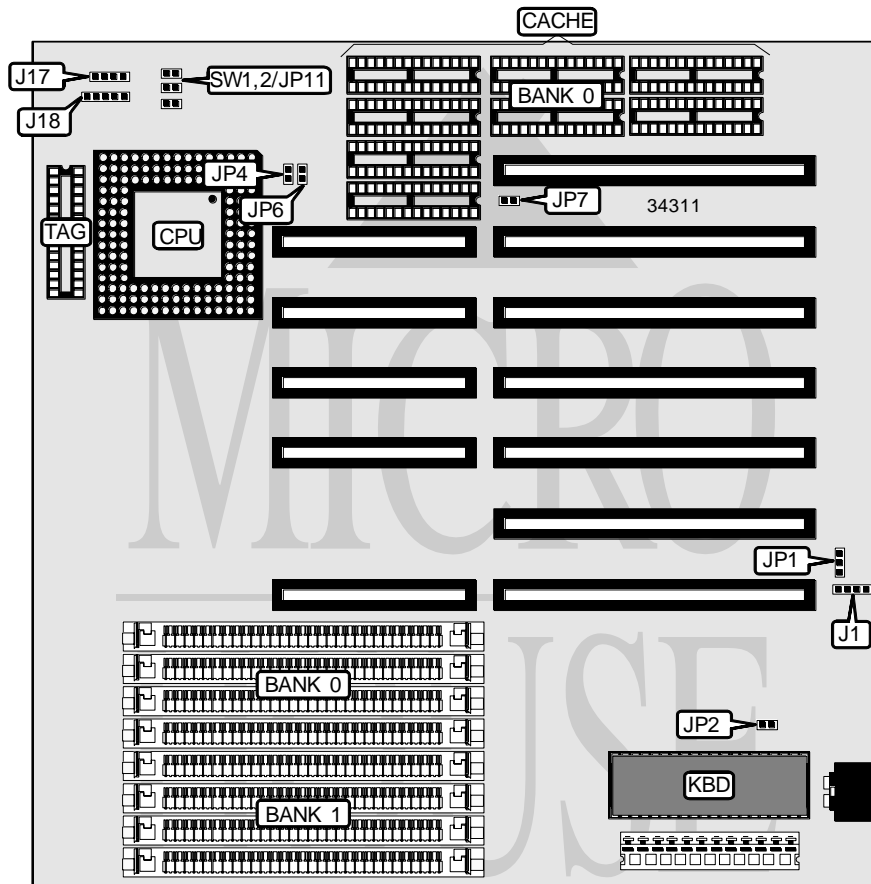

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo LED	JP11
Speaker	J17	Reset switch	SW1
Power LED & keylock	J18	Turbo switch	SW2

Continued on next page. . .

UNIDENTIFIED 486 MOTHER BOARD

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
? CMOS memory normal operation	JP1	Pins 2 & 3 closed
CMOS memory clear	JP1	Pins 1 & 2 closed
Monitor type select monochrome	JP2	Closed
Monitor type select CGA/EGA/VGA	JP2	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION		
Size	Bank 0	TAG
64KB	(8) 8K x 8	(1) 8K x 8
256KB	(8) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION			
Size	JP4	JP6	JP7
64KB	Open	Open	Open
256KB	Closed	Closed	Closed

Note: Above jumpers are shown for location purposes only and may not be exact.