
## DELL COMPUTER CORPORATION ARC SYSTEM BOARD

Processor
Processor Speed
Chip Set
Video Chip Set
Maximum Onboard Memory
Maximum Video Memory
Cache
BIOS
Dimensions
I/O Options
NPU Options

8088 4.77/8MHz Unidentified None 640KB None Unidentified 330mm x 218mm None 8087

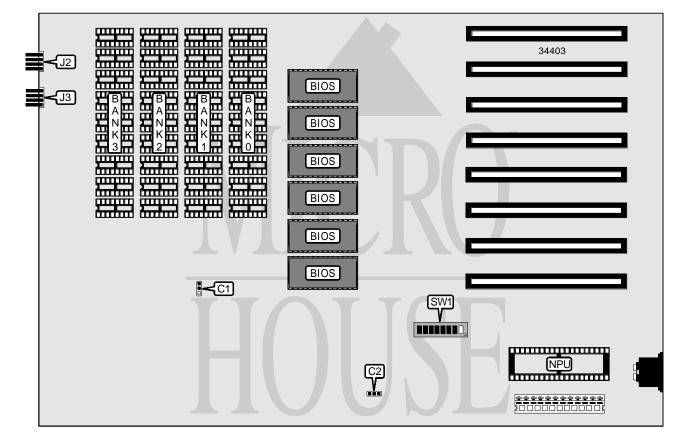

CONNECTIONS			
Purpose	Location	Purpose	Location
Light pen connector	J2	Speaker	J3

Continued on next page. . .

## DELL COMPUTER CORPORATION ARC SYSTEM BOARD

... continued from previous page

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Factory configured - do not alter	C2	Pins 2 & 3 closed	
í Factory configured - do not alter	SW1/1	Off	
NPU not installed	SW1/2	On	
NPU installed	SW1/2	Off	
í Factory configured - do not alter	SW1/3	Off	
í Factory configured - do not alter	SW1/4	Off	

## DRAM CONFIGURATION

Note: Board accepts 256KB/640KB memory. The configuration is unidentified.

DRAM JUMPER CONFIGURATION		
Size	C1	
256KB	Pins 1 & 2 closed	
640KB	Pins 2 & 3 closed	

VIDEO SELECTION			
Setting	SW1/5	SW1/6	
Monochrome	Off	Off	
CGA	On	Off	
EGA	On	On	

FLOPPY DRIVE SELECTION			
Drives installed	SW1/7	SW1/8	
1	On	On	
2	Off	On	
3	On	Off	
4	Off	Off	