


OLIVETTI

M300-04

Configuration

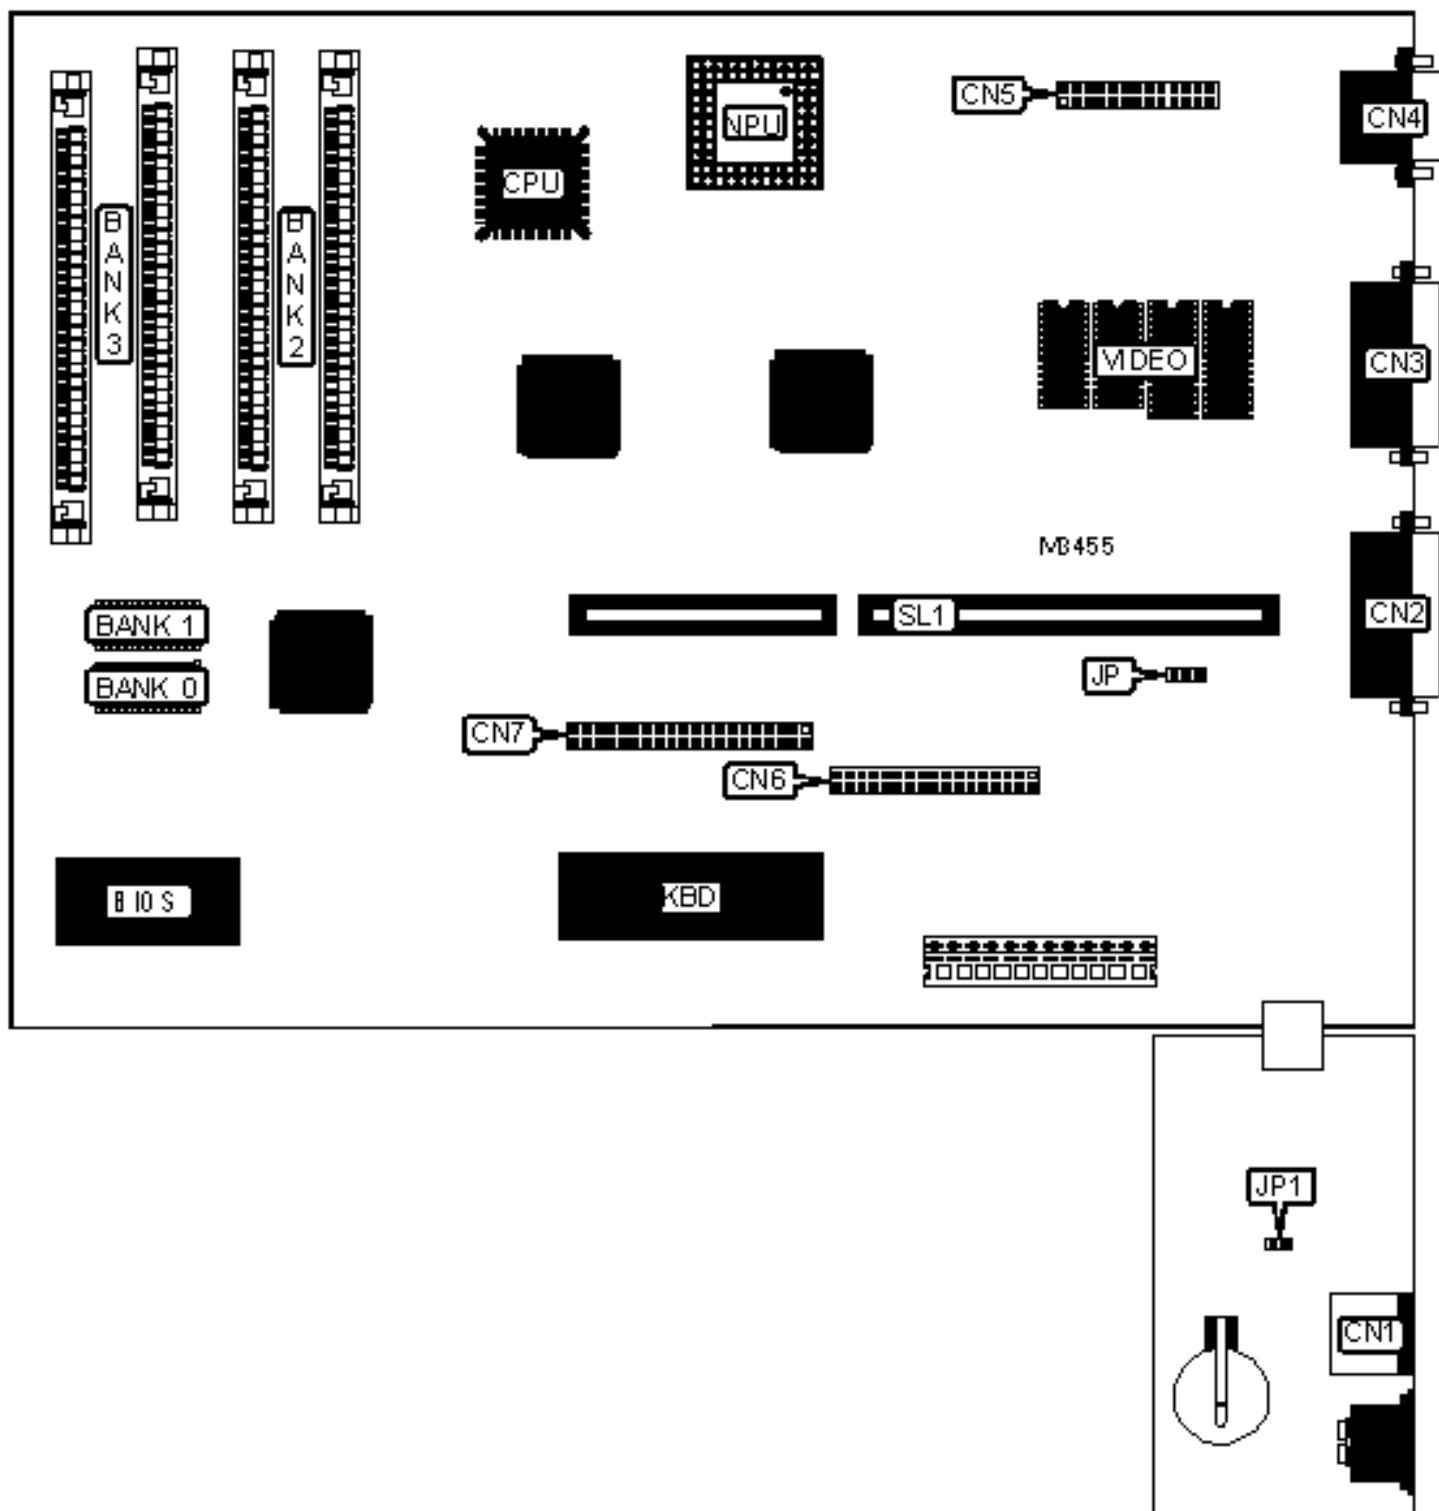

CONNECTIONS

Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	Feature connector	CN5
Serial port	CN2	Floppy drive interface	CN6
Parallel port	CN3	IDE interface	CN7
VGA port	CN4	Riser slot	SL1

USER CONFIGURABLE SETTINGS

Function		Label	Position
	Password disabled	JP	Pins 1 & 2 closed
	Password enabled	JP	Pins 2 & 3 closed
	Battery enabled/CMOS memory normal operation	JP1	Closed
	Battery disabled/CMOS memory clear	JP1	Open

DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(1) 256K x 18	(1) 256K x 18	None	None
3MB	(1) 256K x 18	(1) 256K x 18	(2) 1M x 9	None
9MB	(1) 256K x 18	(1) 256K x 18	(2) 4M x 9	None
11MB	(1) 256K x 18	(1) 256K x 18	(2) 1M x 9	(2) 4M x 9
11MB	(1) 256K x 18	(1) 256K x 18	(2) 4M x 9	(2) 1M x 9
17MB	(1) 256K x 18	(1) 256K x 18	(2) 4M x 9	(2) 4M x 9

VIDEO MEMORY CONFIGURATION

Note: The size and chip configuration of the video memory is unidentified.