


ABIT COMPUTER CORPORATION

F P 2

Processor	80386SX
Processor Speed	16/20MHz
Chip Set	C&T CS8281 NEATsx
Video Chip Set	None
Maximum Onboard Memory	5MB
Maximum Video Memory	None
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

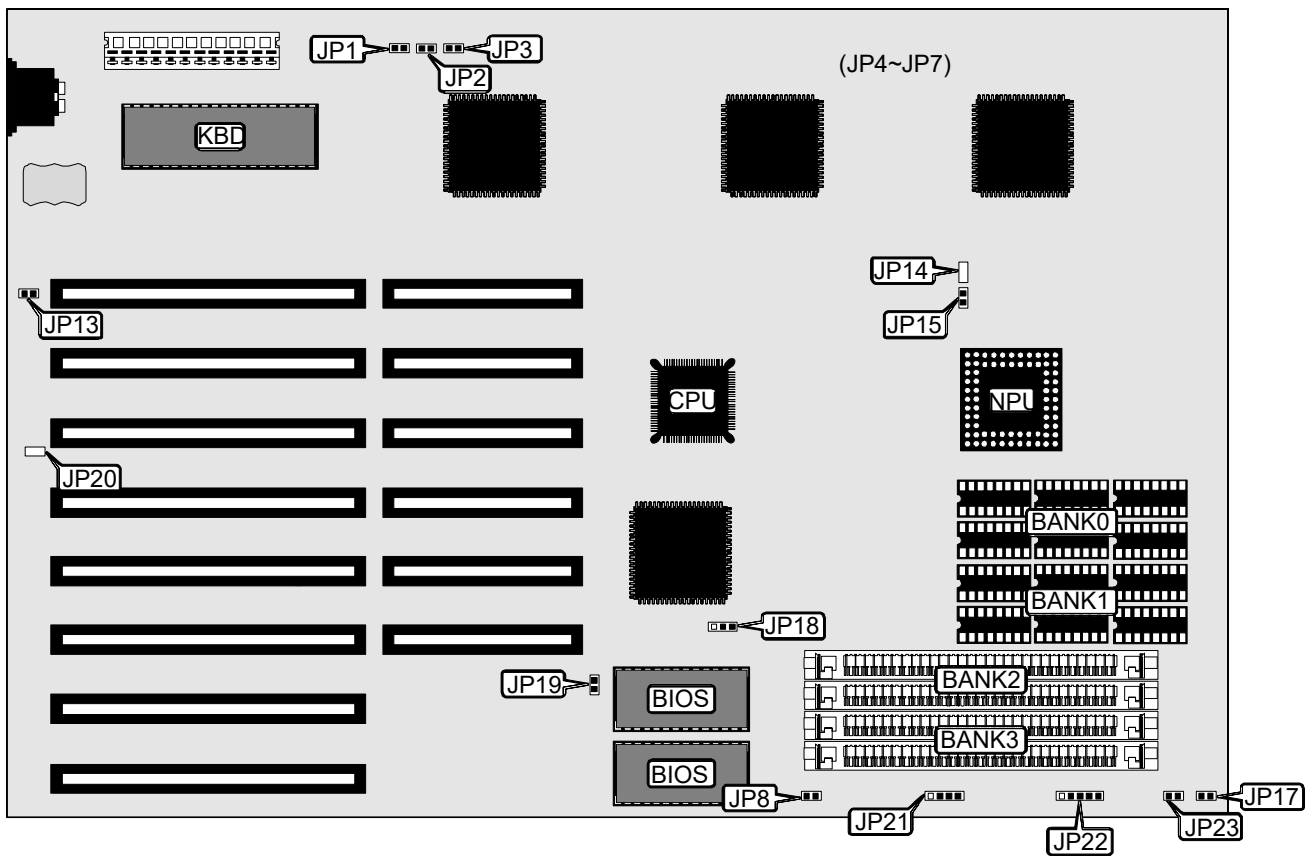

Continued on next page . . .

ABIT COMPUTER CORPORATION

FP 2

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	JP8	Power LED & keylock	JP22
Turbo switch	JP17	Reset switch	JP23
Speaker	JP21	External battery	JP26

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JP1	Unidentified
í Monitor type select monochrome	JP3	Open
Monitor type select color/EGA	JP3	Closed
í CMOS memory normal operation	JP13	Open
CMOS memory clear	JP13	Closed
í Factory configured - do not alter	JP14	Unidentified
í NPU synchronous with CPU	JP15	Open
NPU asynchronous with CPU	JP15	Closed
í BIOS type select 27128	JP18	Pins 1 & 2 closed
BIOS type select 27256	JP18	Pins 2 & 3 closed
í Factory configured - do not alter	JP20	Unidentified

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 44256 & (2) 41256	(4) 44256 & (2) 41256	None	None
1MB	None	None	(2) 256K x 9	(2) 256K x 9
2MB	(4) 44256 & (2) 41256	(4) 44256 & (2) 41256	(2) 256K x 9	(2) 256K x 9
4MB	None	None	(2) 1M x 9	(2) 1M x 9
5MB	(4) 44256 & (2) 41256	(4) 44256 & (2) 41256	(2) 1M x 9	(2) 1M x 9

DRAM JUMPER CONFIGURATION	
Size	JP19
1MB	Open
1MB	Closed
2MB	Open
4MB	Closed
5MB	Open