


MCP6P M2+ Motherboard

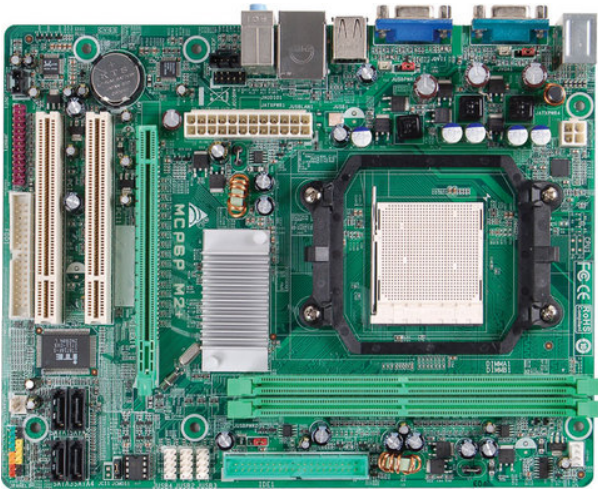

- Socket AM2+/AM2
- Supports AMD Phenom II/Phenom/Athlon 64 X2/64/FX/Sempron Processors
- Hyper Transport Technology up to 2G
- Supports AMD Cool'n'Quiet Technology
- It is recommended to use 95w CPU
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

MCP6P M2+ Specification

| | |
|------------------|--|
| CPU SUPPORT | <p>AMD Phenom™ II X4 Processor AMD Phenom™ II X3 Processor AMD Phenom™ X4 Processor AMD Phenom™ X3 Processor AMD Athlon™ X2 Dual-Core Processor AMD Athlon™ 64 X2 Dual-Core Processor AMD Athlon™ 64 FX Processor AMD Athlon™ 64 Processor AMD Sempron™ Processor Maximum CPU TDP (Thermal Design Power) : 95Watt</p> |
| HT | Support HT 2G |
| MEMORY | <p>Support Dual Channel DDR2 533/667/800 MHz 2 x DDR2 DIMM Memory Slot Max. Supports up to 4GB Memory</p> |
| INTEGRATED VIDEO | NVIDIA GeForce 6150 GPU, On Board Graphic Max. Memory Share Up to 512MB(Under OS By Turbo Cache) |
| STORAGE | <p>4 x SATA II Connector 1 x IDE Connector Support SATA RAID: 0,1,5,0+1</p> |

| | |
|----------------|--|
| LAN | Realtek RTL8201CL - 10/100 PHY |
| AUDIO CODEC | Realtek ALC662 6-Channel HD Audio |
| USB | 4 x USB 2.0 Port 3 x USB 2.0 Header |
| EXPANSION SLOT | 1 x PCI-E x16 Slot 2 x PCI Slot |
| REAR I/O | 1 x PS/2 Mouse 1 x PS/2 Keyboard 4 x USB 2.0 Port 1 x COM Port 1 x VGA Port 1 x LAN Port 3 x Audio Jacks |
| INTERNAL I/O | 3 x USB 2.0 Header 4 x SATA II Connector (3Gb/s) 1 x IDE Connector 1 x Floppy Connector 1 x Front Audio Header 1 x Front Panel Header 1 x CD-IN Header 1 x S/PDIF-Out Header 1 x CPU Fan Connector 1 x System Fan Connector 1 x Printer Port Header |
| DIMENSION | Micro ATX Form Factor Dimension: 24.4cm X 19cm (W x L) |
| OS SUPPORT | Supports Windows XP / Vista |
| ACCESSORIES | 1 x IDE Cable 1 x SATA Cable 1 x I/O Shield 1 x Fully Setup Driver CD 1 x Quick Guide |
| FEATURES | Windows 7 Compatible Supports AM3/AM2+ Supports Solid capacitor BIO-FLASHER |

MCP6P M2+ OVERVIEW

***The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!**