



Topstar

SHENZHEN TOPSTAR TECHNOLOGY CO., LTD

- [Top Star](#)
- [Latest](#)
- [product](#)
- [Download](#)
- [Company](#)
- [Technical](#)
- [Glorious](#)

- [Home](#)
- [News](#)
- [Information](#)
- [Center](#)
- [Profile](#)
- [Support](#)
- [History](#)
- [Contact Us](#)



Adobe Flash Player is no longer supported

驱动下载

- [Motherboard driver download](#)
- [Onboard Graphics Driver](#)
- [IDE driver](#)
- [sound card driver](#)
- [NIC driver](#)
- [USB drive](#)
- [SATA drive](#)
- [RAID driver](#)
- [manual](#)
- [BIOS](#)
- [1394 drive](#)

常见问题


- [How to determine the motherboard model, BIOS version, and sound card chip model](#)
- [How old motherboards support large hard drives](#)
- [WINXP SP2 Solution](#)

>>more

工具下载

- [Network copy software netghost](#)
- [Adobe Acrobat Reader V7.0 decompression software](#)
- [ALC sound card public version driver](#)
- [TM-K8V8 b57 series network card MAC address refresh software](#)
- [Catalyst driver for ATi Radeon series graphics cards](#)

Intel

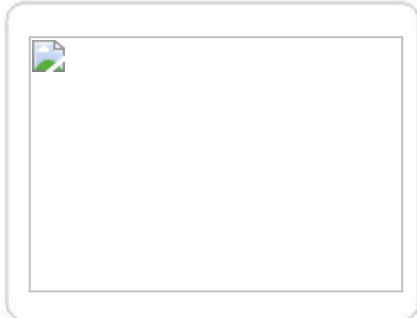

TM-945GM

1. Adopt Intel 945GC+ICH7 chipset, support 1066/800/533 FSB LGA775 Intel® CoreTM2 Extreme / CoreTM2 Duo /Pentium 4 / Pentium D /Celeron D processor 2.
- Support dual-channel DDR2 667/533 memory, the maximum Support 2GB
3. Integrated Intel GMA 950 graphics display chip
- 4.1PCIE_16x + 3PCI+ 2DIMM
5. Support 8 USB2.0 interfaces
6. Support 2 S-ATAII interfaces
7. Onboard PCI 100M network card
8. Support 1 parallel ATA 100
9. Onboard AC'97 5.1 channel sound card

CPU	LGA775 Intel® CoreTM2 Extreme / CoreTM2 Duo /Pentium 4 / Pentium D /Celeron D Processor
chipset	Intel 945GC+ICH7
Memory	Support dual-channel DDR2 667/533 memory, up to 2GB
expansion slot	1PCIE_16x + 3PCI+ 2DIMM
Onboard graphics card	Intel GMA 950
onboard sound card	Onboard AC'97 5.1 channel sound card
Onboard network card	Onboard PCI 100M network card
onboard interface	2x Serial ATAII interface 1 x IDE interface Front panel audio interface CPU/chassis fan interface 20-pin ATX power interface, 4-pin 12V power interface CD input pin can be connected to CD/DVD-ROM Front panel interface can expand functions 2 sets of USB 2.0 pins Shaped connector (supports 4 USB 2.0 ports)
Rear I/O	1 x PS/2 Mouse Port 1 x PS/2 Keyboard Port 1 x Serial Port 1 xVGA) 4 x USB 2.0 Ports 1 x RJ-45 LAN Jack Audio Jack Side Speaker/Rear Speaker/Center/Bass /Line In/Front Speaker/Microphone
BIOS	Award (plug and play)
appendix	HDD cable, CD, manual, SATA cable and SATA power cable
structure	MicroATX