


# DATA TECHNOLOGY CORPORATION DTC3150B, DTC3150AS (400484-89XX)

Q2/92

Data bus: 8-bit, ISA  
 Size: Half-length, full-height card  
 Hard drives supported: Up to seven SCSI devices  
 Floppy drives supported: None

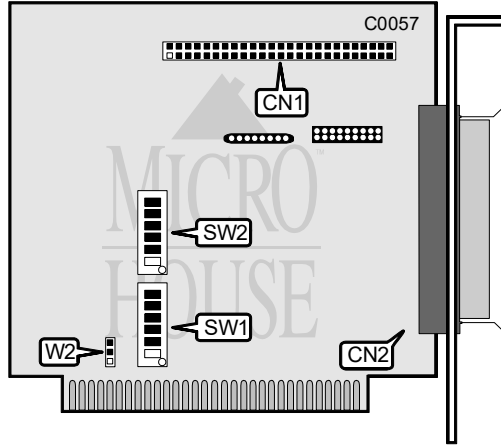

CONNECTIONS	
Function	Location
50-pin SCSI connector-internal	CN1
50-pin SCSI connector-external	CN2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
SCSI parity check enabled	SW1/3	off
SCSI parity check disabled	SW1/3	on

Continued on next page . . .

**DATA TECHNOLOGY CORPORATION**  
**DTC3150B, DTC3150AS**

. . . continued from previous page

INTERRUPT REQUEST		
IRQ	SW1/1	SW1/2
IRQ4	on	on
IRQ5	off	on
IRQ6	on	off
í IRQ7	off	off

SCSI ADDRESS			
SCSI ID	SW1/4	SW1/5	SW1/6
0	on	on	on
1	off	on	on
2	on	off	on
3	off	off	on
4	on	on	off
5	off	on	off
6	on	off	off
í 7	off	off	off

INQUIRY INTERRUPT REQUEST				
IRQ	SW2/1	SW2/2	SW2/3	SW2/4
IRQ4	off	off	off	on
IRQ5	off	off	on	off
IRQ6	off	on	off	off
í IRQ7	on	off	off	off

BIOS ADDRESS		
Address	SW2/5	SW2/6
í CC00h	on	on
DC00h	on	off
C800h	off	on
D800h	off	off