


UNIDENTIFIED MAGIC AT I/O PLUS CARD

Card Type
Hard Drives supported
Floppy drives supported
I/O options
Data Bus
Card Size

Multi I/O card
Two IDE drives
Two 360KB, 720KB, 1.2MB, or 1.44MB drives
Game port, serial ports (2), parallel port
16-bit ISA
Half-length, full-height card

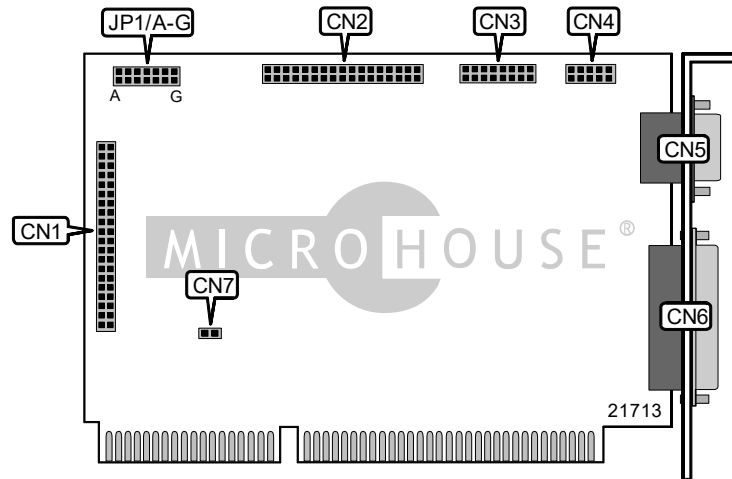

CONNECTIONS			
Function	Location	Function	Location
40-pin primary IDE(AT) connector	CN1	9-pin serial port 1 - external	CN5
34-pin cable connector - floppy drive	CN2	25-pin parallel port - external	CN6
16-pin game port	CN3	2-pin connector - drive active LED	CN7
10-pin serial port 2 - internal	CN4		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Serial port 2 enabled	JP1/A	Closed	
Serial port 2 disabled	JP1/A	Open	
Serial port 1 enabled	JP1/B	Closed	
Serial port 1 disabled	JP1/B	Open	
Floppy drive interface enabled	JP1/C	Closed	
Floppy drive interface disabled	JP1/C	Open	
IDE(AT) interface enabled	JP1/D	Closed	
IDE(AT) interface disabled	JP1/D	Open	
Game port enabled	JP1/E	Closed	
Game port disabled	JP1/E	Open	

PARALLEL PORT ADDRESS SELECTION			
Setting	JP1/F	JP1/G	
LPT1 (378h)	Closed	Closed	
LPT2 (278h)	Open	Closed	
LPT3 (3BCh)	Closed	Open	
Disabled	Open	Open	