


EAGLE TECHNOLOGY
NE2000 (ASSY. #810-149-00X)

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus
Wiring Type RG--58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Available

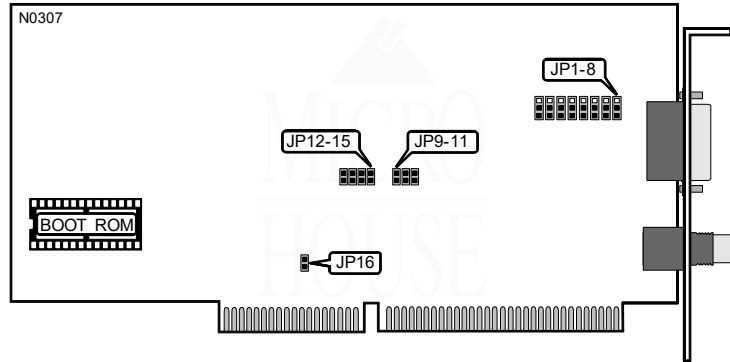

CABLE TYPE	
Type	JP1-JP8
RG--58A/U 50ohm coaxial	Pins 2 & 3 closed
AUI transceiver via DB-15 port	Pins 1 & 2 closed

BOOT ROM	
Setting	JP11
iEnabled	Closed
Disabled	Open

BASE I/O AND BOOT ROM ADDRESS			
Address	Boot ROM	JP9	JP10
i300h	C8000h	Closed	Closed
320h	CC000h	Open	Closed
340h	D0000h	Closed	Open
360h	N/A	Open	Open

Note: Address 360h cannot be used with a boot ROM.

Continued on next page . . .

EAGLE TECHNOLOGY

NE2000 (ASSY. #810-149-00X)

... continued from previous page

INTERRUPT REQUEST				
IRQ	JP12	JP13	JP14	JP15
2/9	Closed	Open	Open	Open
i3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

COMPATABILITY MODE	
Setting	JP16
iDisabled	Closed
Enabled	Open