


ADVANCED INTEGRATION RESEARCH, INC.  
STAR2000

|                                     |                       |
|-------------------------------------|-----------------------|
| <b>Category</b>                     | Video                 |
| <b>Video Types Supported</b>        | XVGA                  |
| <b>Video Processor</b>              | P9000                 |
| <b>Highest Resolution Supported</b> | 1280 x 1024           |
| <b>Data Bus Type</b>                | 32-bit VESA Local Bus |
| <b>Memory Type</b>                  | VRAM                  |
| <b>Maximum Onboard Memory</b>       | 2048KB                |

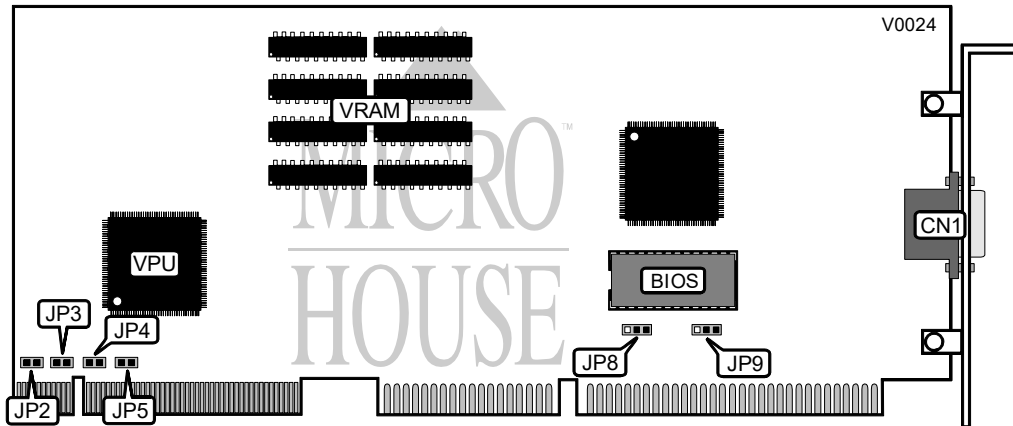

| CONNECTIONS              |          |
|--------------------------|----------|
| Purpose                  | Location |
| 15-pin analog video port | CN1      |

| INTERRUPT SELECTION |                   |
|---------------------|-------------------|
| IRQ 2/9             | JP8               |
| Disabled            | Pins 1 & 2 closed |
| Enabled             | Pins 2 & 3 closed |

| ZERO WAIT STATE SELECTION |                   |
|---------------------------|-------------------|
| Setting                   | JP9               |
| Enabled                   | Pins 1 & 2 closed |
| Disabled                  | Pins 2 & 3 closed |

| PROTECTED MODE ADDRESS SELECTION |        |        |      |      |
|----------------------------------|--------|--------|------|------|
| Address                          | JP2    | JP3    | JP4  | JP5  |
| 0E00h                            | Closed | Open   | Open | Open |
| C000h                            | Closed | Closed | Open | Open |
| D000h                            | Open   | Closed | Open | Open |
| F000h                            | Open   | Open   | Open | Open |