


LONGSHINE MICROSYSTEM, INC.  
LCS-6814F

**Card Type** Floppy drive controller  
**Chipset/Controller** N/A  
**I/O Options** Floppy drive interface (3)  
**Maximum DRAM** N/A

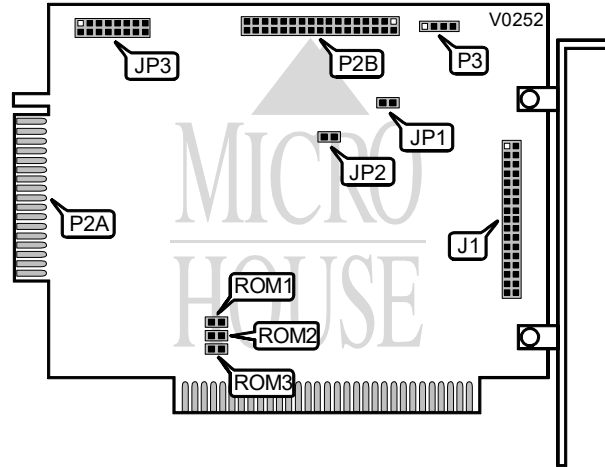

CONNECTIONS			
Purpose :	Location	Purpose :	Location
External floppy drive interface	J1	Floppy drive interface 3/4	P2B
Floppy drive interface A/B	P2A	Power connector	P3

GROUND SELECTION	
Select	JP1
if Ground is not connected to the system case	Closed
Ground is connected to the system case	Open

I/O ADDRESS SELECTION	
Address	JP2
if 3F0h - 3F7h	Pins 1 & 2 closed
370h - 377h	Pins 2 & 3 closed

Continued on next page . . .

LONGSHINE MICROSYSTEM, INC.  
LCS-6814F

... continued from previous page

DRIVE TYPE SELECTION								
Drive Type	Drive A		Drive B		Drive 3		Drive 4	
	JP3/1	JP3/2	JP3/3	JP3/4	JP3/5	JP3/6	JP3/7	JP3/8
360KB	Either	Either	Either	Either	Either	Either	Either	Either
720KB	Open	Closed	Open	Closed	Open	Closed	Open	Closed
1.2MB	Closed	Either	Closed	Either	Closed	Either	Closed	Either
1.44MB	Open	Open	Open	Open	Open	Open	Open	Open

ROM ADDRESS SELECTION			
Address	DM1	DM2	DM3
CC000h - CFFFFh	Open	Closed	Open
CA000h - C8FFFh	Closed	Open	Open
CE000h - CFFFFh	Open	Open	Closed