SEANIX TECHNOLOGY, INC.
ASI-WINJET (VER. 1.0)

Category	Video
Video Types Supported	XVGA
Video Processor	Western Digital WD90C31A
Highest Resolution Supported	1280 x 1024
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	1MB
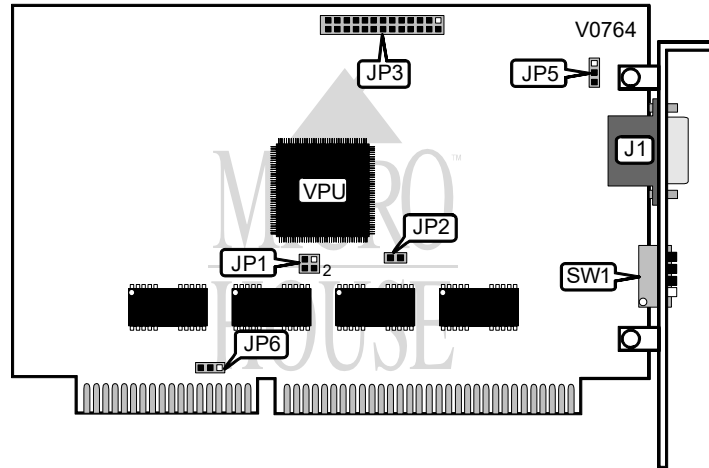
CONNECTIONS			
Purpose	Location	Purpose	Location
Video out	J1	VGA feature connector	JP3

VERTICAL RETRACE SELECTION FOR 800 X 600		
Rate	SW1/1	SW1/2
56Hz	Off	Off
56Hz	On	On
60Hz	Off	On
72Hz	On	Off

VERTICAL RETRACE SELECTION FOR 1024 X 768		
Rate	SW1/3	SW1/4
Interlaced	Off	Off
Interlaced	On	On
60Hz non-interlaced	Off	On
70Hz non-interlaced	On	Off

SEANIX TECHNOLOGY, INC.
ASI-WINJET (VER. 1.0)

HORIZONTAL RETRACE SELECTION	
Rate	JP1
í 31.5KHz	Pins 3 & 4 open
40KHz	Pins 3 & 4 closed

WAIT STATE CONFIGURATION	
Wait States	JP2
í 0	Closed
>0	Open

ADDRESS LATCH CONFIGURATION	
Setting	JP6
í Non-80286 systems	Pins 1 & 2 closed
80286 systems	Pins 2 & 3 closed

FACTORY CONFIGURED - DO NOT ALTER	
Jumper	Setting
JP5	Open
JP1 pins 1 & 2	Open