


BOCA RESEARCH, INC.
BOCAMODEM FM96ID

Modem Type	Data (asynchronous)/Fax
Maximum Data Rate	2400bps
Maximum Fax Rate	9600bps
Data Bus	8-bit ISA1
Fax Class	Class I
Data Modulation Protocol	Bell 103A/212A ITU-T V.22, V.22bis
Fax Modulation Protocol	V.27ter, V.29

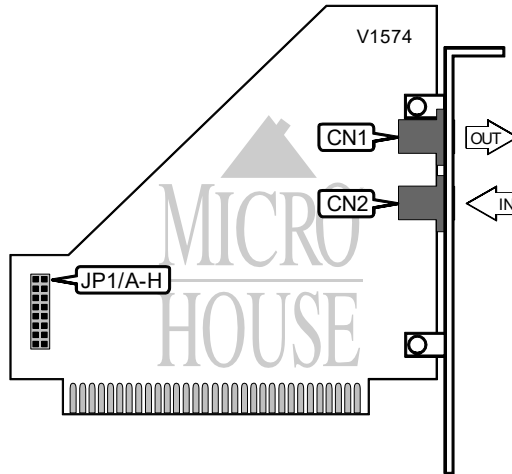

CONNECTIONS			
Purpos	Location	Purpos	Location
Line out	CN1	Line in	CN2

BASE I/O ADDRESS SELECTION				
Port	JP1/A	JP1/B	JP1/C	JP1/D
COM3: (3E8h)	Open	Open	Closed	Open
COM1: (3F8h)	Closed	Open	Open	Open
COM2: (2F8h)	Open	Closed	Open	Open
COM4: (2E8h)	Open	Open	Open	Closed

INTERRUPT SELECTION				
IRQ	JP1/E	JP1/F	JP1/G	JP1/H
5	Open	Open	Closed	Open
3	Closed	Open	Open	Open
4	Open	Closed	Open	Open
7	Open	Open	Open	Closed

Continued on next page . . .

BOCA RESEARCH, INC.
BOCAMODEM FM96ID

...continued from previous page

BIT-MAPPED REGISTERS	
Register	Default
S14	170
S16	128
S21	0
S22	118
S23	7
S27	64
S28	none