


**BOCA RESEARCH, INC.**  
**ON-LINE EXPRESS V.34 (MV.34AI)**

**Modem Type** Data (asynchronous)/Fax/Voice  
**Maximum Data Rate** 28.8Kbps  
**Maximum Fax Rate** 14.4Kbps  
**Data Bus** 8 bit ISA  
**Fax Class** Class I  
**Data Modulation Protocol** AT&T V.32terbo  
 Bell 103A/212A  
 ITU-T V.21, V.22bis, V.23, V.32, V.32bis, V.34  
**Fax Modulation Protocol** ITU-T V.17, V.21CH2, V.27ter, V.29  
**Error Correction/Compression** MNP5, V.42, V.42bis

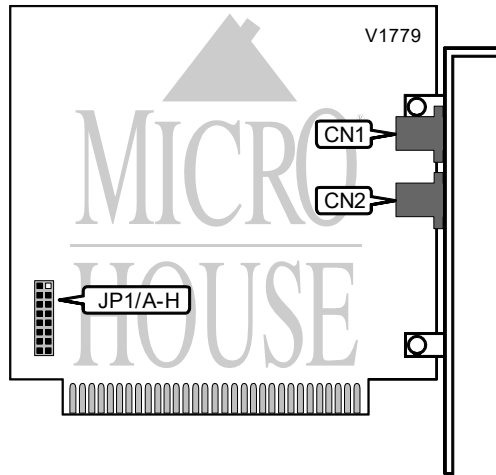

CONNECTIONS			
Purpos	Location	Purpos	Location
Line in	CN1	Line out	CN2

SERIAL PORT ADDRESS				
Setting	JP1/E	JP1/F	JP1/G	JP1/H
COM1 (3F8h)	Closed	Open	Open	Open
iCOM2 (2F8h)	Open	Closed	Open	Open
COM3 (3E8h)	Open	Open	Closed	Open
COM4 (2E8h)	Open	Open	Open	Closed

Continued on next page . . .

BOCA RESEARCH, INC.  
ON-LINE EXPRESS V.34 (MV.34AI)

...continued from previous page

INTERRUPT				
Setting	JP1/A	JP1/B	JP1/C	JP1/D
3	Closed	Open	Open	Open
4	Open	Closed	Open	Open
5	Open	Open	Closed	Open
7	Open	Open	Open	Closed

**Proprietary AT Command Set**

See document V1772 for a full command summary