


STB SYSTEMS, INC. WIND/X

| | |
|-------------------------------------|--------------|
| Card Type | Video |
| Video Processor | Unidentified |
| Maximum Onboard Memory | 1MB VRAM |
| Video Types Supported | XVGA |
| Data Bus | 16-bit ISA |
| Highest Resolution Supported | 1024 x 768 |

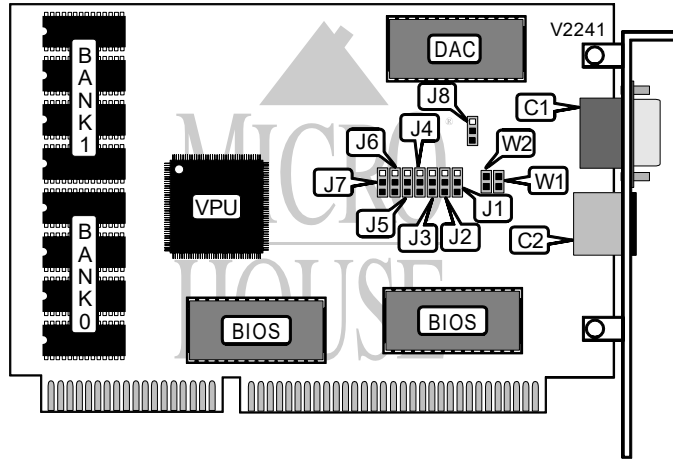

| CONNECTIONS | | | |
|-----------------|-------|----------------|-------|
| Function | Label | Function | Label |
| 15-pin VGA port | C1 | Bus mouse port | C2 |

| USER CONFIGURABLE SETTINGS | | |
|-------------------------------------|-------|-------------------|
| Setting | Label | Position |
| í Factory configured - do not alter | J1 | Unidentified |
| í Video does not use IRQ2/9 | J2 | Pins 1 & 2 closed |
| Video uses IRQ2/9 | J2 | Pins 2 & 3 closed |
| í BIOS uses 8-bit I/O | J3 | Pins 2 & 3 closed |
| BIOS uses 16-bit I/O | J3 | Pins 1 & 2 closed |
| í Bus mouse enabled | J8 | Pins 2 & 3 closed |
| Bus mouse disabled | J8 | Pins 1 & 2 closed |

| VRAM | | |
|-------|--------------|--------------|
| Size | Bank 0 | Bank 1 |
| 512KB | (4) 256K x 4 | NONE |
| 1MB | (4) 256K x 4 | (4) 256K x 4 |

| VRAM JUMPER SETTINGS | |
|----------------------|-------------------|
| Size | J4 |
| 512KB | Pins 2 & 3 closed |
| 1MB | Pins 1 & 2 closed |

Continued on next page. . .

STB SYSTEMS, INC.
WIND/X

. . . continued from previous page

| SCAN RATE | | | | | |
|--------------|-------------------|-----------------|------------|------------|------------|
| Resolution | Vertical Scan | Horizontal Scan | J5 | J6 | J7 |
| í 640 x 480 | 60Hz | 31.5KHz | Pins 1 & 2 | Pins 2 & 3 | Pins 2 & 3 |
| í 800 x 600 | 60Hz | 37.5KHz | Pins 1 & 2 | Pins 2 & 3 | Pins 2 & 3 |
| í 1024 x 768 | 60Hz | 48KHz | Pins 1 & 2 | Pins 2 & 3 | Pins 2 & 3 |
| 640 x 480 | 60Hz | 31.5KHz | Pins 1 & 2 | Pins 1 & 2 | Pins 2 & 3 |
| 800 x 600 | 60Hz | 37.5KHz | Pins 1 & 2 | Pins 1 & 2 | Pins 2 & 3 |
| 1024 x 768 | 43Hz (interlaced) | 35.5KHz | Pins 1 & 2 | Pins 1 & 2 | Pins 2 & 3 |
| 640 x 480 | 60Hz | 37.5KHz | Pins 2 & 3 | Pins 2 & 3 | Pins 2 & 3 |
| 800 x 600 | 60Hz | 37.5KHz | Pins 2 & 3 | Pins 2 & 3 | Pins 2 & 3 |
| 1024 x 768 | 72Hz | 48KHz | Pins 2 & 3 | Pins 2 & 3 | Pins 2 & 3 |
| 640 x 480 | 72Hz | 37.5KHz | Pins 2 & 3 | Pins 1 & 2 | Pins 1 & 2 |
| 800 x 600 | 72Hz | 48KHz | Pins 2 & 3 | Pins 1 & 2 | Pins 1 & 2 |
| 1024 x 768 | 70Hz | 56.4KHz | Pins 2 & 3 | Pins 1 & 2 | Pins 1 & 2 |
| 640 x 480 | 60Hz | 31.5KHz | Pins 1 & 2 | Pins 2 & 3 | Pins 1 & 2 |
| 800 x 600 | 56Hz | 35KHz | Pins 1 & 2 | Pins 2 & 3 | Pins 1 & 2 |
| 1024 x 768 | 60Hz | 48KHz | Pins 1 & 2 | Pins 2 & 3 | Pins 1 & 2 |
| 640 x 480 | 60Hz | 31.5KHz | Pins 1 & 2 | Pins 1 & 2 | Pins 1 & 2 |
| 800 x 600 | 53Hz | 35KHz | Pins 1 & 2 | Pins 1 & 2 | Pins 1 & 2 |
| 1024 x 768 | 43Hz (interlaced) | 35.5KHz | Pins 1 & 2 | Pins 1 & 2 | Pins 1 & 2 |
| 640 x 480 | 72Hz | 37.5KHz | Pins 2 & 3 | Pins 2 & 3 | Pins 1 & 2 |
| 800 x 600 | 72Hz | 48KHz | Pins 2 & 3 | Pins 2 & 3 | Pins 1 & 2 |
| 1024 x 768 | 60Hz | 48KHz | Pins 2 & 3 | Pins 2 & 3 | Pins 1 & 2 |

Note: Pins designated are in the closed position.

| BUS MOUSE INTERRUPT | | |
|---------------------|--------|--------|
| Setting | W1 | W2 |
| IRQ2/9 | Closed | Open |
| í IRQ5 | Open | Closed |