
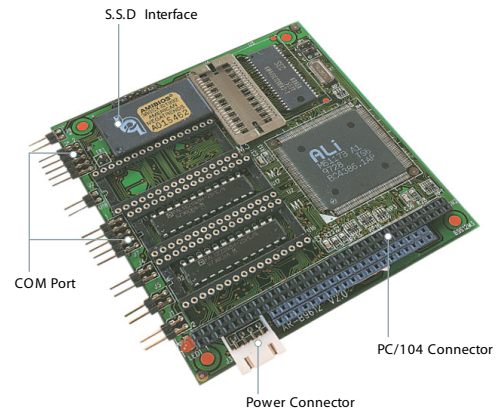


# AR-B1320

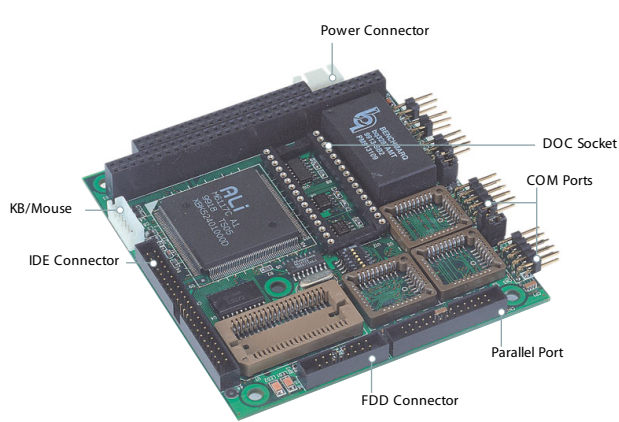

# AR-B9612

### Features:

386

PC104

EDO

2 COM

DOC

SSD

PC104 Slot

Compact 386SX EPC with SSD, DOC(AR-B1320)

### System

CPU	33 MHz	
Chipset	ALI M6117C AIF	
System Memory	Onboard 2MB EDO RAM and one socket for 2MB expansion	Onboard 1MB or 2MB DRAM (Optional)
BIOS	AMI	
SSD	Supports 1MB Flash and one socket for 512KB flash or for DiskOnChip (DOC)	Up to 1.5MB flash disk (3 sockets)
Watchdog Timer	Programmable watchdog timer	
Expansion Interface	PC/104	
Power Consumption	+5V only, 1.0A maximum (Based on 33MHz CPU)	+5V, 0.8A maximum
RTC	BQ3287MT or compatible chips	
Dimension	90mm x 96mm ( 3.5" x 3.8 ")	
Operating Temperature	0~60°C(32~140°F)	
Storage Temperature	-20~80°C(-4~176°F)	
Operating Humidity	0% ~ 95% Relative humidity non-condensing	

### Packing list

Part No.	Cable: FDD, KB, COM, Power	Cable:KB, COM, Power
	Utility Disk, Manual	

## Ordering Information

### I/O

Main IO	1xE-IDE, 1xFDD, 1xPC/AT (KB), 2xRS232C/485, 1xLPT	1xPC/AT (KB), 2xRS232C/485
---------	---	----------------------------

### Standard

AR-B1320	Compact 386SX EPC with DOC, SSD
AR-B9612	Compact 386SX EPC with SSD

Specifications are subject to change without notice.