


## BEC COMPUTER ENTERPRISES

### C & T 386-20/25

Processor	80386DX
Processor Speed	20/25MHz
Chip Set	C & T
Max. Onboard DRAM	32MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit external memory card
NPU Options	80387/3167

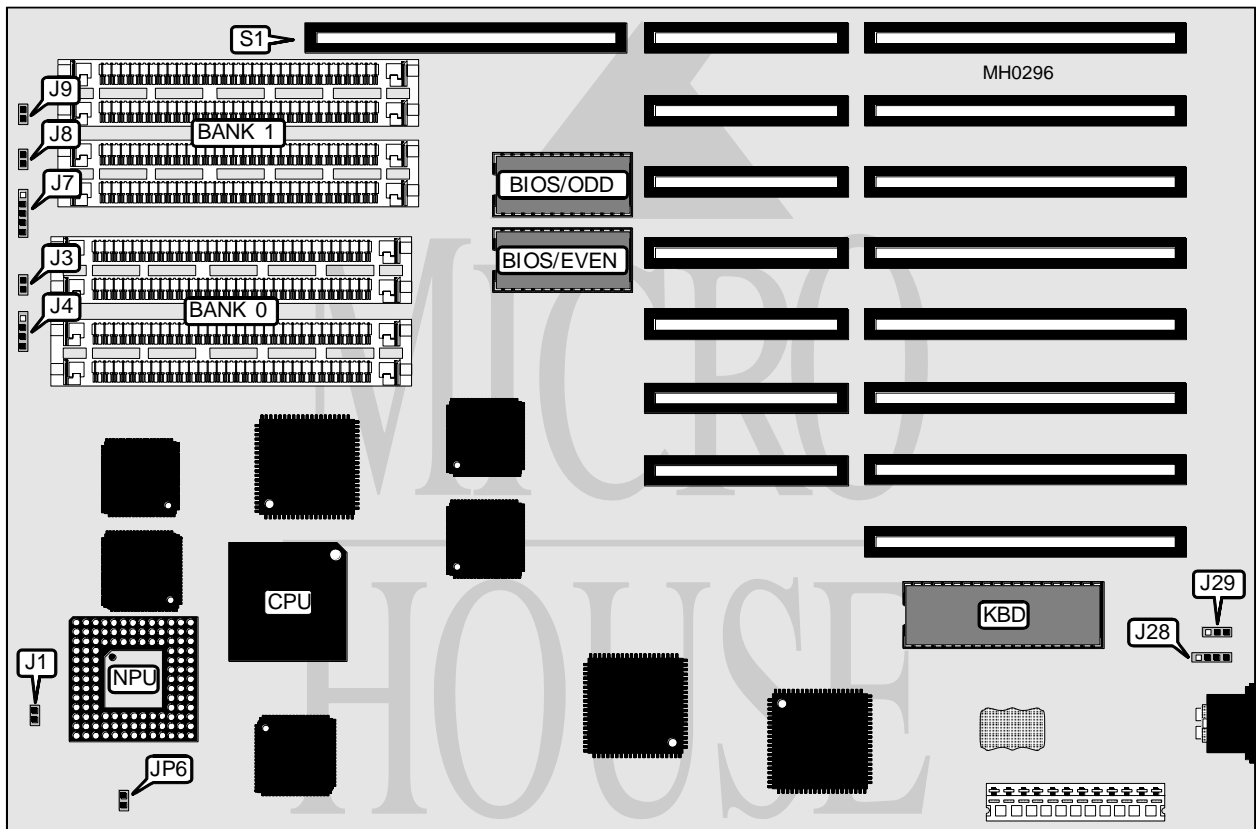

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	J3	Turbo LED	J9
Speaker	J4	External battery	J28
Power LED & Keylock	J7	32-bit external memory card	S1
Reset switch	J8		

*Continued on next page . . .*

## BEC COMPUTER ENTERPRISES

C &amp; T 386-20/25

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	J1	Open
Monitor type select color	J1	Closed
í CMOS memory normal operation	J29	pins 1 & 2 closed
CMOS memory clear	J29	pins 2 & 3 closed
í NPU type select 3167 or none	JP6	Open
NPU type select 80387	JP6	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9