
UNIDENTIFIED

386DX 33 CACHE

Processor 80386DX **Processor Speed** 33MHz **Chip Set** Elite Max. Onboard DRAM 32MB Cache 64/128KB **BIOS** AMI

Dimensions 330mm x 218mm

I/O Options None **NPU Options** 80387/3167

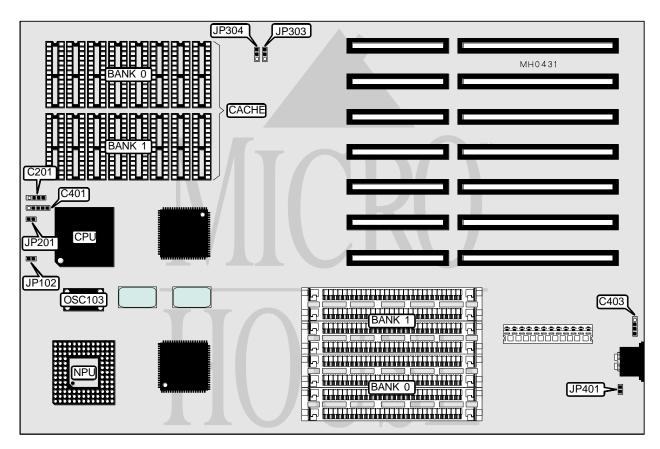

| CONNECTIONS | | | | |
|---------------------|----------|------------------|----------|--|
| Purpose | Location | Purpose | Location | |
| Speaker | C201 | External battery | C403 | |
| Power LED & keylock | C401 | Reset switch | JP201 | |

Continued on next page . . .

UNIDENTIFIED 386DX 33 CACHE

. . . continued from previous page

| USER CONFIGURABLE SETTINGS | | | | |
|--|--------|----------|--|--|
| Function | Jumper | Position | | |
| í NPU mode select synchronous with CPU clock | JP102 | Open | | |
| NPU mode select synchronous with crystal installed at OSC103 | JP102 | Closed | | |
| í Monitor type select color | JP401 | Closed | | |
| Monitor type select monochrome | JP401 | Open | | |

| DRAM CONFIGURATION | | | | |
|--------------------|--------------|--------------|--|--|
| Size | Bank 0 | Bank 1 | | |
| 1MB | (4) 256K x 9 | NONE | | |
| 2MB | (4) 256K x 9 | (4) 256K x 9 | | |
| 4MB | (4) 1M x 9 | NONE | | |
| 5MB | (4) 256K x 9 | (4) 1M x 9 | | |
| 8MB | (4) 1M x 9 | (4) 1M x 9 | | |
| 16MB | (4) 4M x 9 | NONE | | |
| 17MB | (4) 256K x 9 | (4) 4M x 9 | | |
| 20MB | (4) 1M x 9 | (4) 4M x 9 | | |
| 32MB | (4) 4M x 9 | (4) 4M x 9 | | |

| CACHE CONFIGURATION | | | |
|---------------------|------------|------------|--|
| Size | Bank 0 | Bank 1 | |
| 64KB | (8) 8K x 8 | NONE | |
| 128KB | (8) 8K x 8 | (8) 8K x 8 | |

| CACHE JUMPER CONFIGURATION | | | |
|----------------------------|-------------------|-------------------|--|
| Size | JP303 | JP304 | |
| 64KB | pins 1 & 2 closed | pins 1 & 2 closed | |
| 128KB | pins 2 & 3 closed | pins 1 & 2 closed | |