


NCR CORPORATION

CLASS 3421

Processor	80386SX
Processor Speed	20MHz
Chip Set	NCR
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	381mm x 254mm
I/O Options	Serial port, parallel port, PS/2 mouse port, SCSI interface (2), floppy drive interface, CPU upgrade slot, proprietary SIMM sockets (3)
NPU Options	80387SX

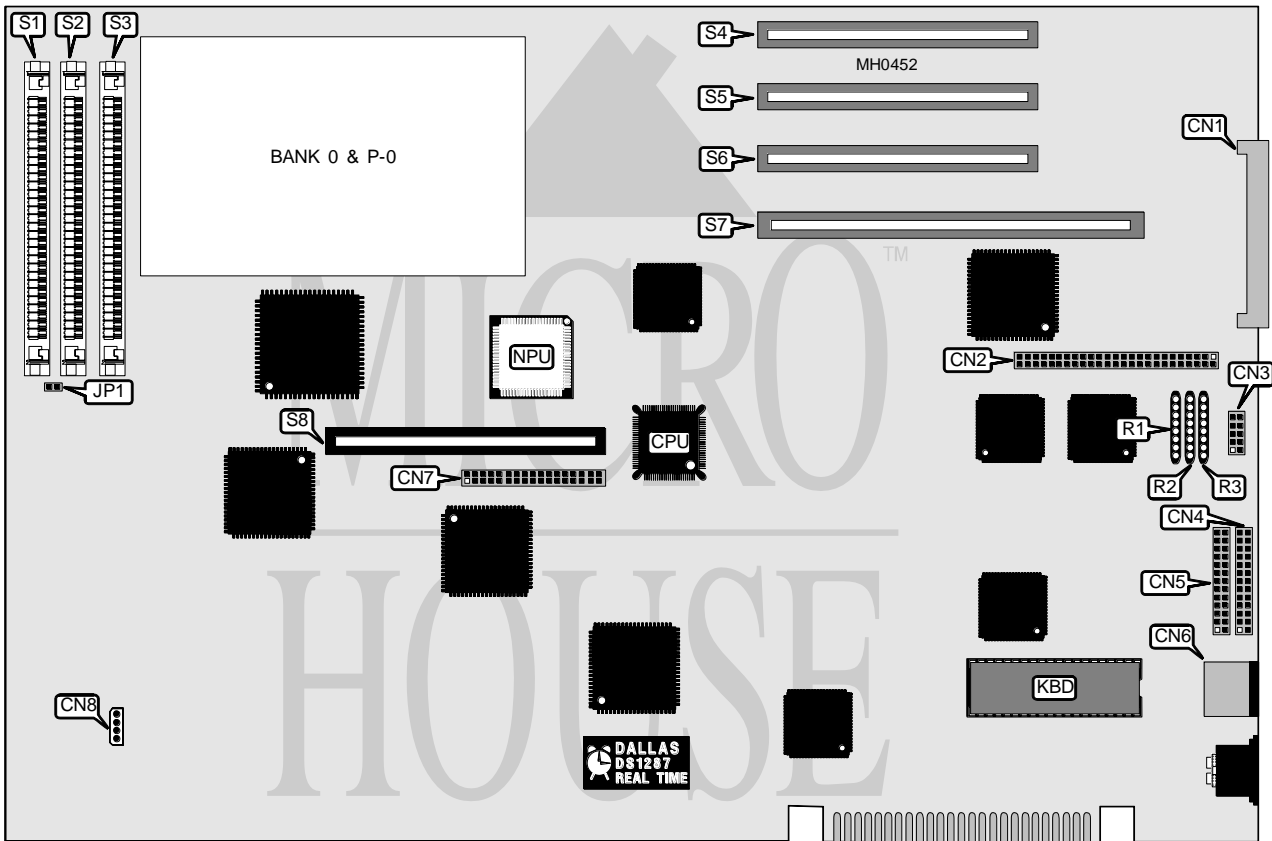

Continued on next page . . .

NCR CORPORATION

CLASS 3421

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Video controller	CN1	IDE/floppy drive power	CN8
Internal SCSI interface	CN2	FS1 header	JP1
External SCSI interface	CN3	SCSI terminating resistors	R1, R2, R3
Serial port	CN4	Proprietary SIMM socket	S1, S2, S3
Parallel port	CN5	MCA slot	S4, S5, S6, S7
PS/2 mouse port	CN6	CPU upgrade slot	S8
Floppy drive interface	CN7		
Note: Pin 1 locations unverified.			

DRAM CONFIGURATION				
Size	Bank 0	S1	S2	S3
2MB	2MB	NONE	NONE	NONE
4MB	2MB	(1) 1M x 18	NONE	NONE
6MB	2MB	(1) 1M x 18	(1) 1M x 18	NONE
8MB	2MB	(1) 1M x 18	(1) 1M x 18	(1) 1M x 18
Note: Bank 0 factory installed and is not configurable. Locations and individual chip sizes for Bank 0 inside DRAM area are unknown.				