


ILON USA, INC.

486 CACHE

Processor	80486SX/80486DX
Processor Speed	20/25/33MHz
Chip Set	SIS
Max. Onboard DRAM	32MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80487SX

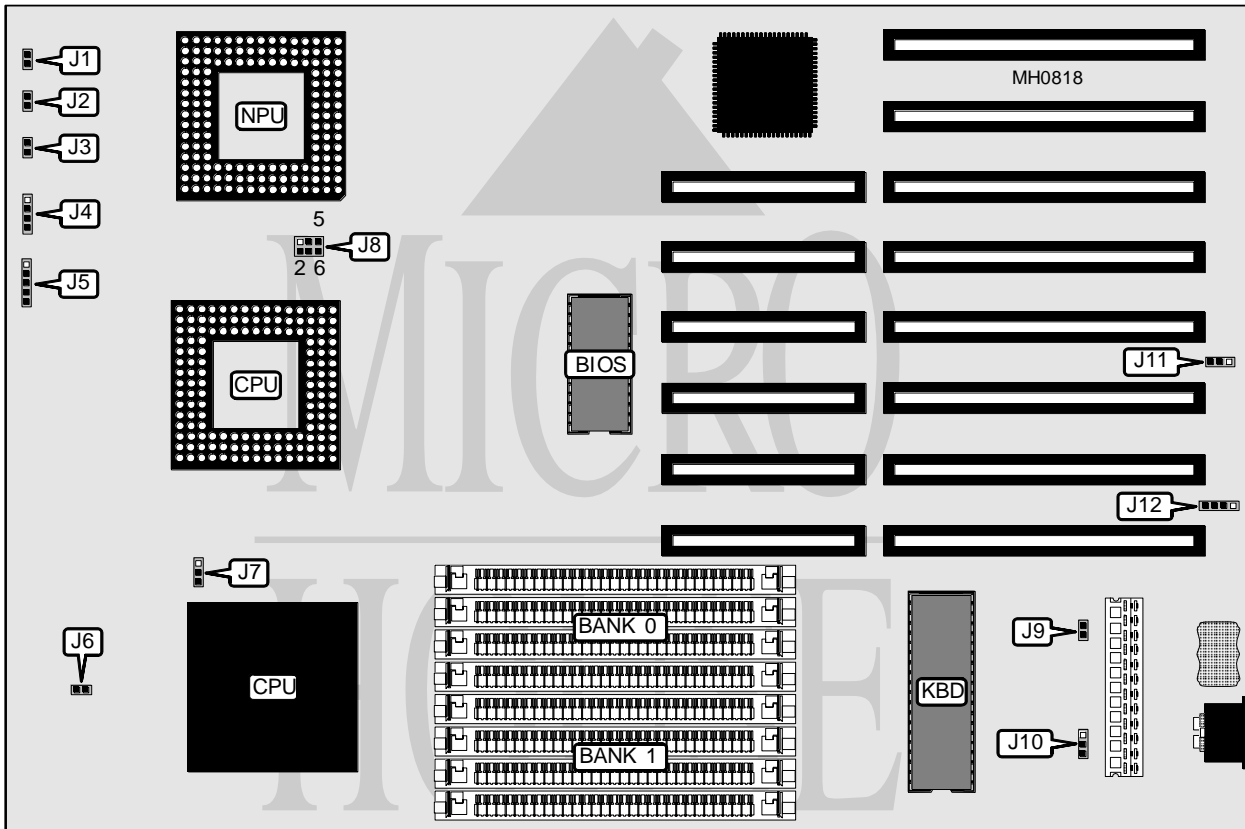

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	J1	Speaker	J4
Turbo switch	J2	Power LED & keylock	J5
Reset switch	J3	External battery	J12

Continued on next page . . .

ILON USA, INC.

486 CACHE

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CPU speed select 20 or 25MHz	J6	Open
CPU speed select 33MHz	J6	Closed
í Ignore error and continue executing	J7	pins 1 & 2 closed
Halt system if error occurs	J7	Open
Error condition controlled by CPU	J7	pins 2 & 3 closed
í Monitor type select color	J9	Closed
Monitor type select monochrome	J9	Open
í Factory configured - do not alter	J10	N/A
í CMOS memory normal operation	J11	pins 1 & 2 closed
CMOS memory clear	J11	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

CPU TYPE CONFIGURATION	
Type	J8
80486SX	pins 4 & 6 closed
80486DX	pins 1 & 2, 3 & 4, 5 & 6 closed