


DTK COMPUTER, INC.

P P M - 2 5 3 0 P

Processor	80386SX
Processor Speed	25MHz
Chip Set	OPTI
Max. Onboard DRAM	16MB
Cache	32KB
BIOS	AMI/DTK
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

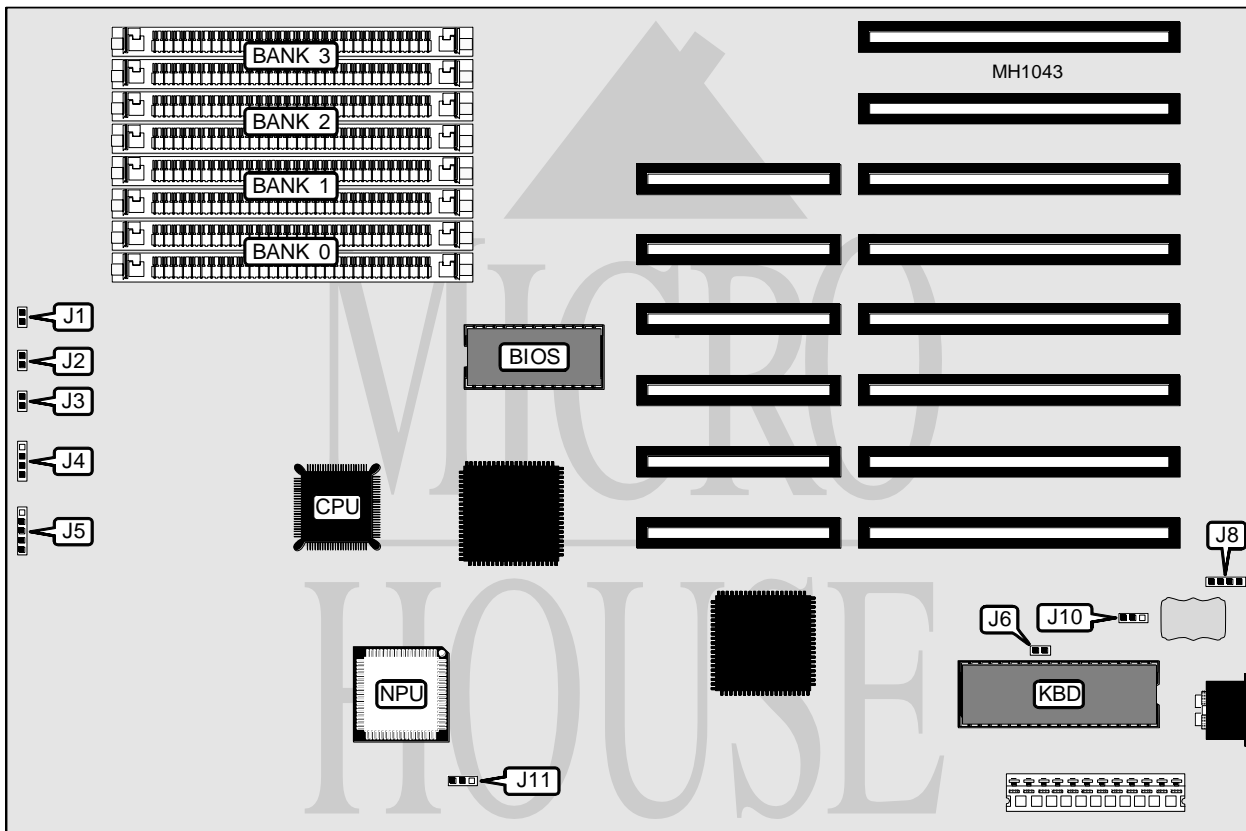

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	J1	Speaker	J4
Turbo switch	J2	Power LED & keylock	J5
Reset switch	J3	External battery	J8

Continued on next page . . .

DTK COMPUTER, INC.
P P M - 2 5 3 0 P

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	J6	Open
Monitor type select color	J6	Closed
í Battery type select external	J10	pins 1 & 2 closed
Battery type select internal	J10	pins 2 & 3 closed
í NPU disabled	J11	pins 1 & 2 closed
NPU enabled	J11	pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
9MB	(2) 256K x 9	(2) 256K x 9	(2) 4M x 9	NONE
10MB	(2) 1M x 9	(2) 4M x 9	NONE	NONE
12MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE

CACHE CONFIGURATION
Note: Cache is factory installed and is not configurable.