


# AMERICAN DIGICOM CORPORATION DIGIS - NEAT

**Processor** 80286  
**Processor Speed** 20MHz  
**Chip Set** C & T Neat  
**Max. Onboard DRAM** 8MB  
**Cache** None  
**BIOS** AMI  
**Dimensions** 330mm x 218mm  
**I/O Options** None  
**NPU Options** 80287

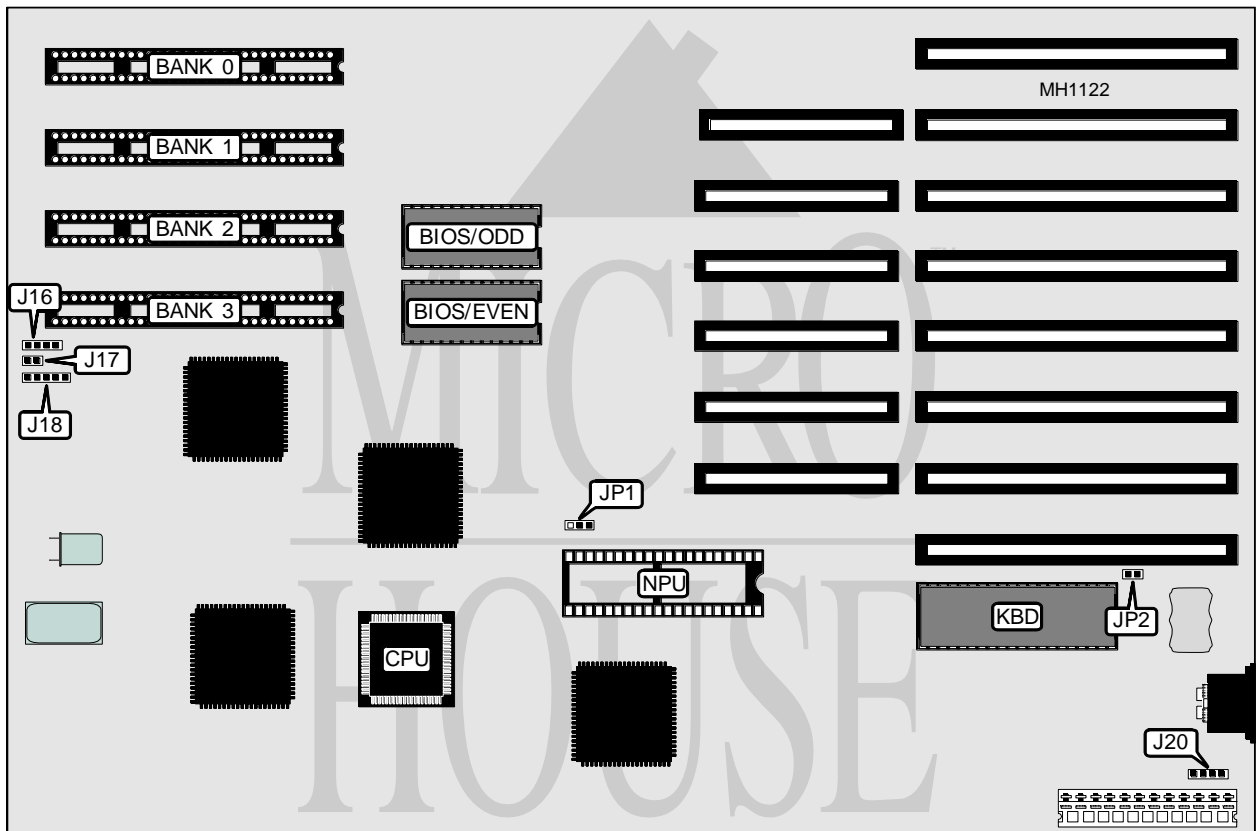

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J16	Power LED & keylock	J18
Reset switch	J17	External battery	J20

Continued on next page . . .

# AMERICAN DIGICOM CORPORATION

## DIGIS - NEAT

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í BIOS type select 27256	JP1	pins 2 & 3 closed
BIOS type select 27128	JP1	pins 1 & 2 closed
í Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9