


DELL COMPUTER CORPORATION SYSTEM 425TE, SYSTEM 433TE

Processor	80487SX/80486DX
Processor Speed	25/33
Chip Set	Intel
Max. Onboard DRAM	64MB (on system memory card)
SRAM Cache	None
BIOS	AMI/Dell
Dimensions	355mm x 304mm
I/O Options	32-bit system memory card
NPU Options	4167

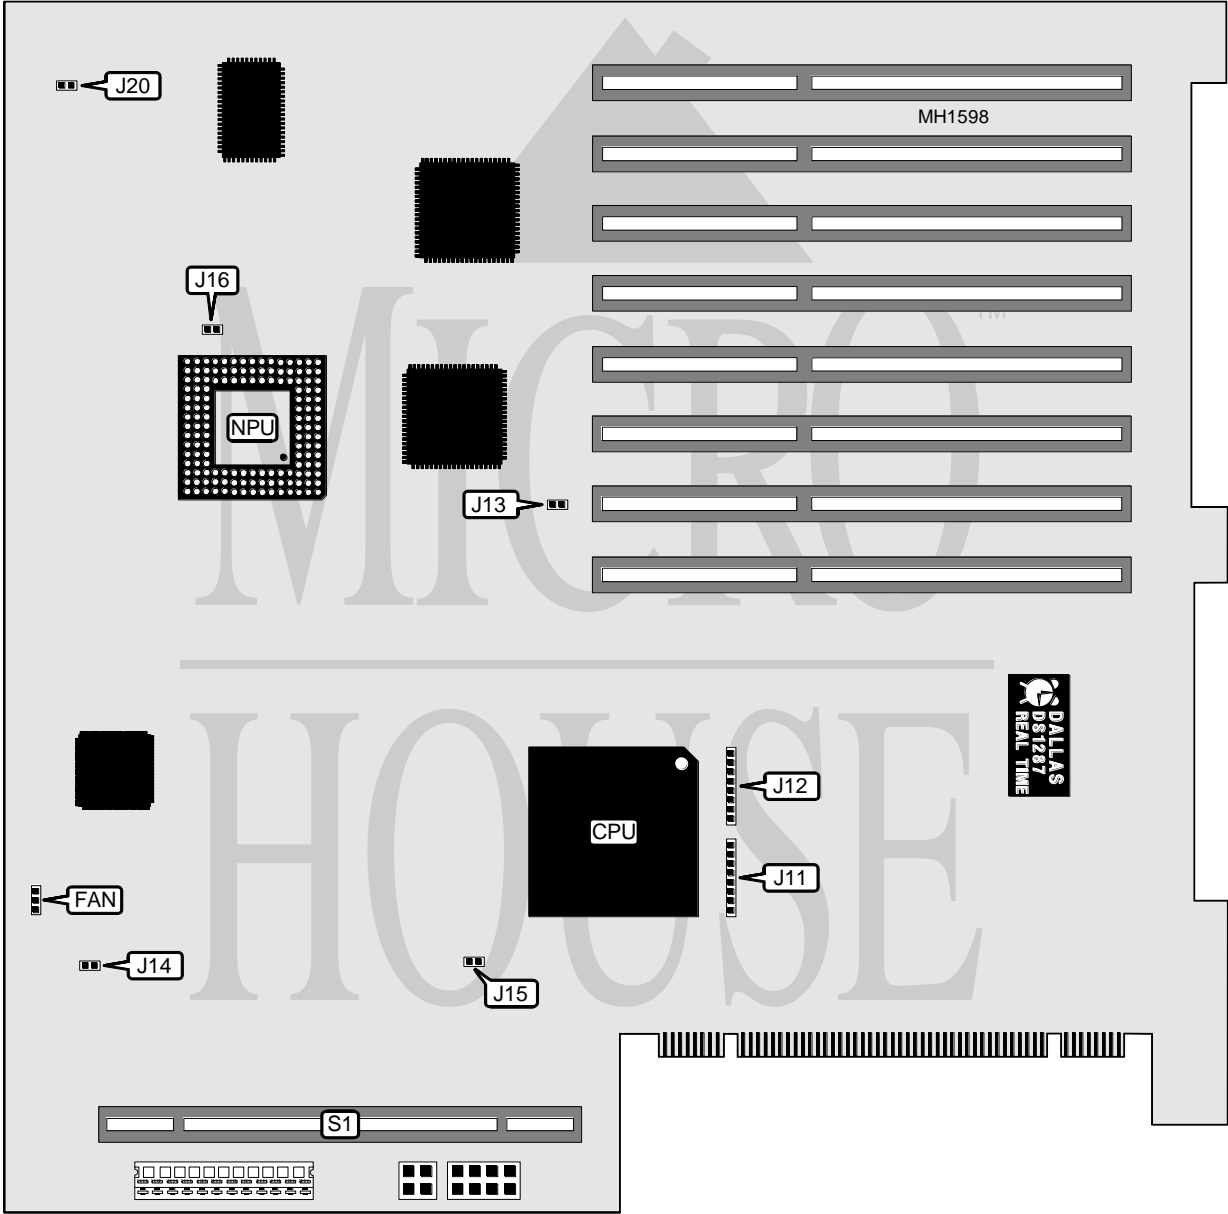

Continued on next page . . .

DELL COMPUTER CORPORATION


SYSTEM 425TE, SYSTEM 433TE

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Dell system-board analyzer port	J12	32-bit system memory card	S1
Fan power	FAN	Dell system board analyzer port	J11

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	J13	Open
í Factory configured - do not alter	J14	Open
í Factory configured - do not alter	J15	Open
í Factory configured - do not alter	J16	Open

32-BIT MEMORY EXPANSION CARD

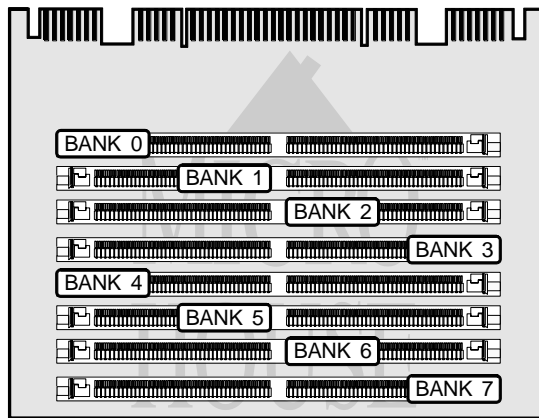

DRAM CONFIGURATION								
Size	Bank 0	Bank 1	Bank 2	Bank 3	Bank 4	Bank 5	Bank 6	Bank 7
1MB	256K x36	NONE	NONE	NONE	NONE	NONE	NONE	NONE
2MB	256K x36	256K x36	NONE	NONE	NONE	NONE	NONE	NONE
2MB	512K x36	NONE	NONE	NONE	NONE	NONE	NONE	NONE
3MB	256K x36	256K x36	256K x36	NONE	NONE	NONE	NONE	NONE
3MB	512K x36	256K x36	NONE	NONE	NONE	NONE	NONE	NONE
4MB	256K x36	256K x36	256K x36	256K x36	NONE	NONE	NONE	NONE
4MB	1M x 36	NONE	NONE	NONE	NONE	NONE	NONE	NONE
4MB	512K x36	256K x36	256K x36	NONE	NONE	NONE	NONE	NONE
56MB	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	NONE
57MB	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	256K x36
58MB	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	512K x36
60MB	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	1M x 36
64MB	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36	2M x 36

Note: Not all configurations shown. Card accepts 256K x 36, 512K x 36, 1M x 36, and 2M x 36 SIMMs in any combination with one exception; the largest SIMMs must be placed in the lower banks starting with bank 0.