


ELITEGROUP COMPUTER SYSTEMS, INC.

P D 3 8 6

Processor	80386DX
Processor Speed	25/33/40MHz
Chip Set	Peaktron
Max. Onboard DRAM	32MB
Cache	32/128KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387DX/3167

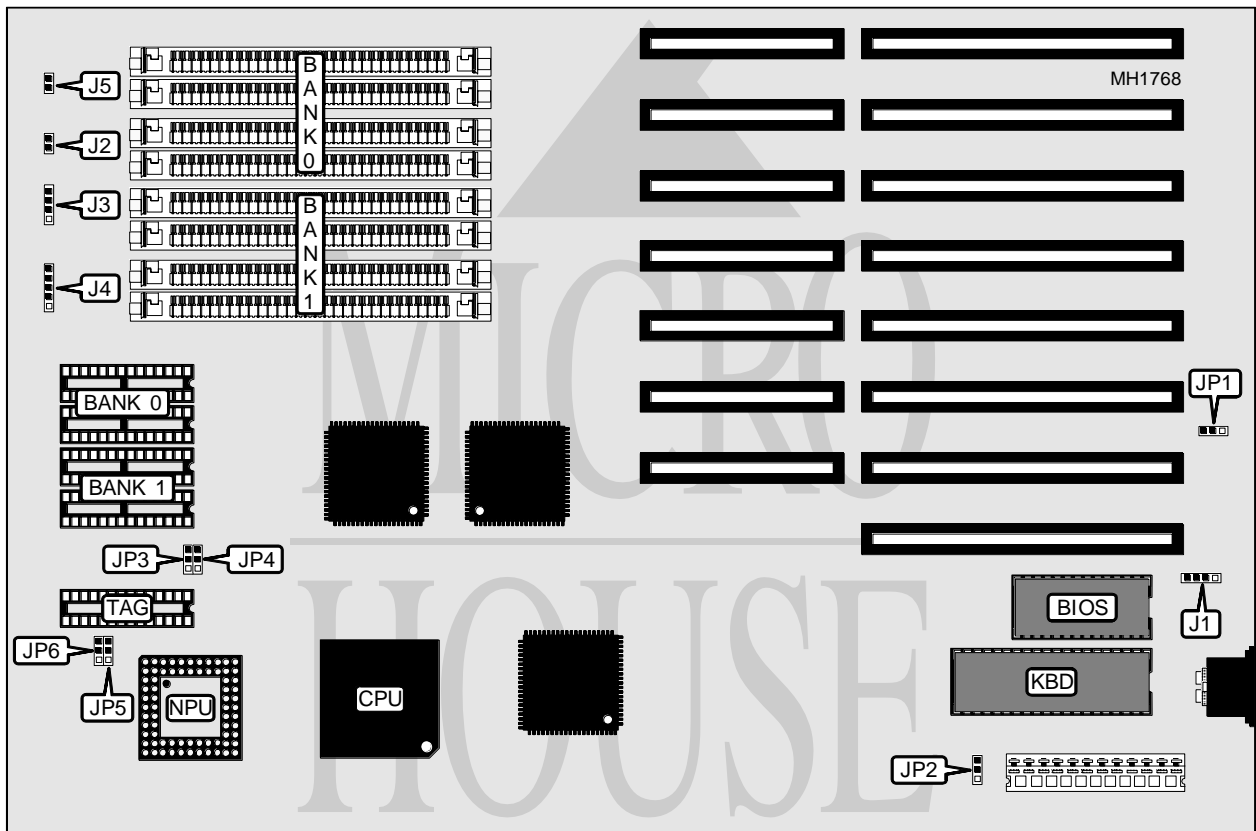

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Power LED & keylock	J4
Reset switch	J2	Turbo LED	J5
Speaker	J3		

Continued on next page . . .

ELITEGROUP COMPUTER SYSTEMS, INC.
P D 3 8 6

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Power good signal detect from power supply	JP1	pins 1 & 2 closed
Power good signal detect from board	JP1	pins 2 & 3 closed
í Monitor type select color	JP2	pins 2 & 3 closed
Monitor type select monochrome	JP2	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
32KB	(2) 8K x 8	(2) 8K x 8	(1) 8K x 8
128KB	(2) 32K x 8	(2) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION				
Size	JP3	JP4	JP5	JP6
32KB	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed
128KB	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed