


# IBM CORPORATION PS/VALUEPOINT 6384 325T, 325T/S

<b>Processor</b>	CX386SLC
<b>Processor Speed</b>	25/50(internal)MHz
<b>Chip Set</b>	Intel
<b>Max. Onboard DRAM</b>	18MB
<b>Cache</b>	None
<b>BIOS</b>	IBM
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit riser card slot, floppy drive interface, hard drive interface, parallel port, PS/2 mouse port, serial port, video port
<b>NPU Options</b>	CX387SLC

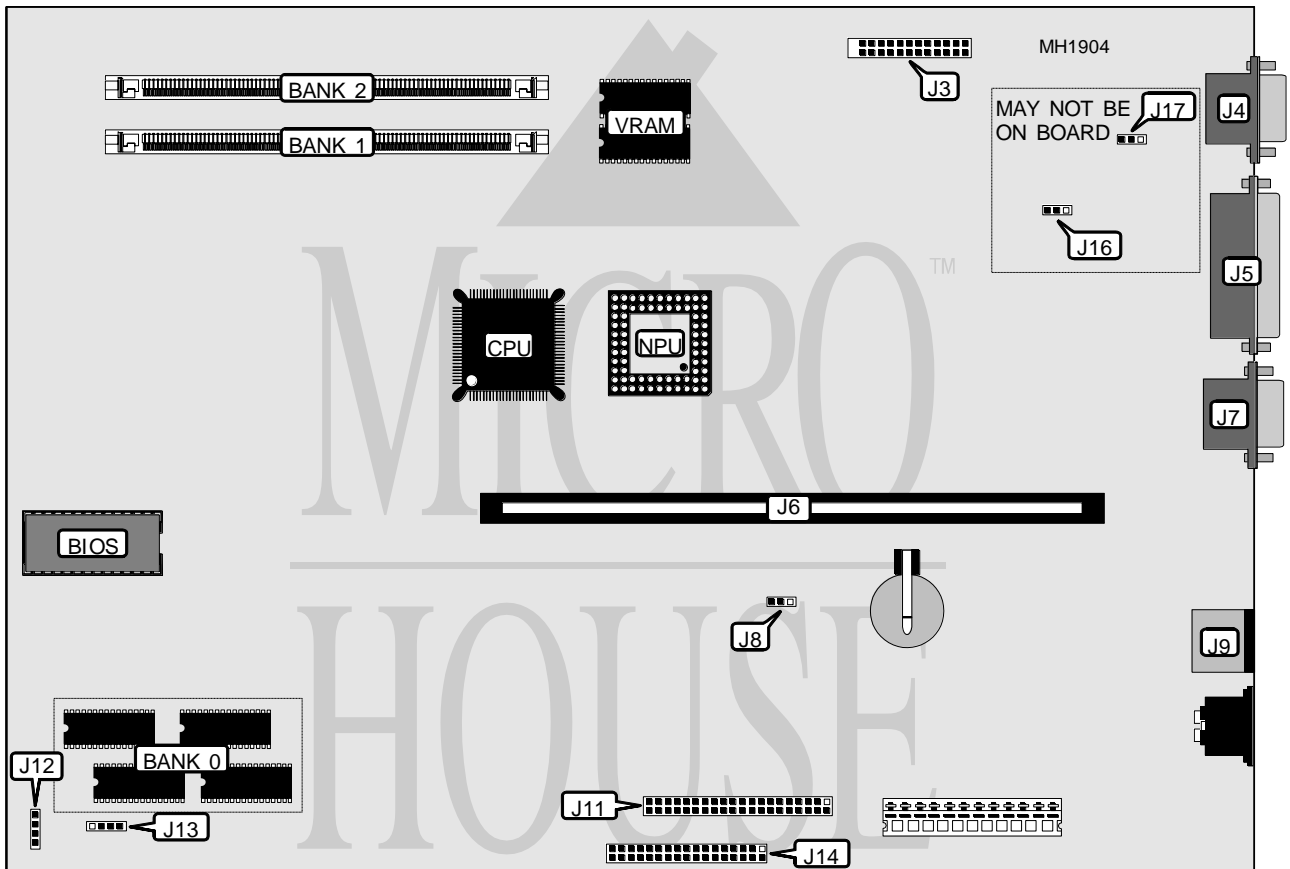

CONNECTIONS			
Purpose	Location	Purpose	Location
Video feature connector	J3	PS/2 mouse port	J9
VGA port	J4	Hard drive interface	J11
Parallel port	J5	Speaker	J12
Riser Card	J6	Floppy drive interface	J14
Serial port 1	J7		

Continued next page...

**IBM CORPORATION**  
**PS/VALUEPOINT 6384 325T, 325T/S**

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Password enabled	J8	pins 1 & 2 closed
Password disabled	J8	pins 2 & 3 closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
2MB	(4) 512K x 9	NONE	NONE
3MB	(4) 512K x 9	(1) 256K x 36	NONE
4MB	(4) 512K x 9	(1) 256K x 36	(1) 256K x 36
6MB	(4) 512K x 9	(1) 1M x 36	NONE
10MB	(4) 512K x 9	(1) 1M x 36	(1) 1M x 36
18MB	(4) 512K x 9	(1) 4M x 36	NONE