


ZENITH DATA SYSTEMS Z - STATION II

Processor	80486DX
Processor Speed	25/33MHz
Chip Set	Unidentified
Max. Onboard DRAM	64MB
Cache	None
BIOS	Unidentified
Dimensions	355mm x 304mm
I/O Options	Parallel port, serial ports (2), VGA feature connector, IDE interface, LAN module, SCSI interface
NPU Options	None

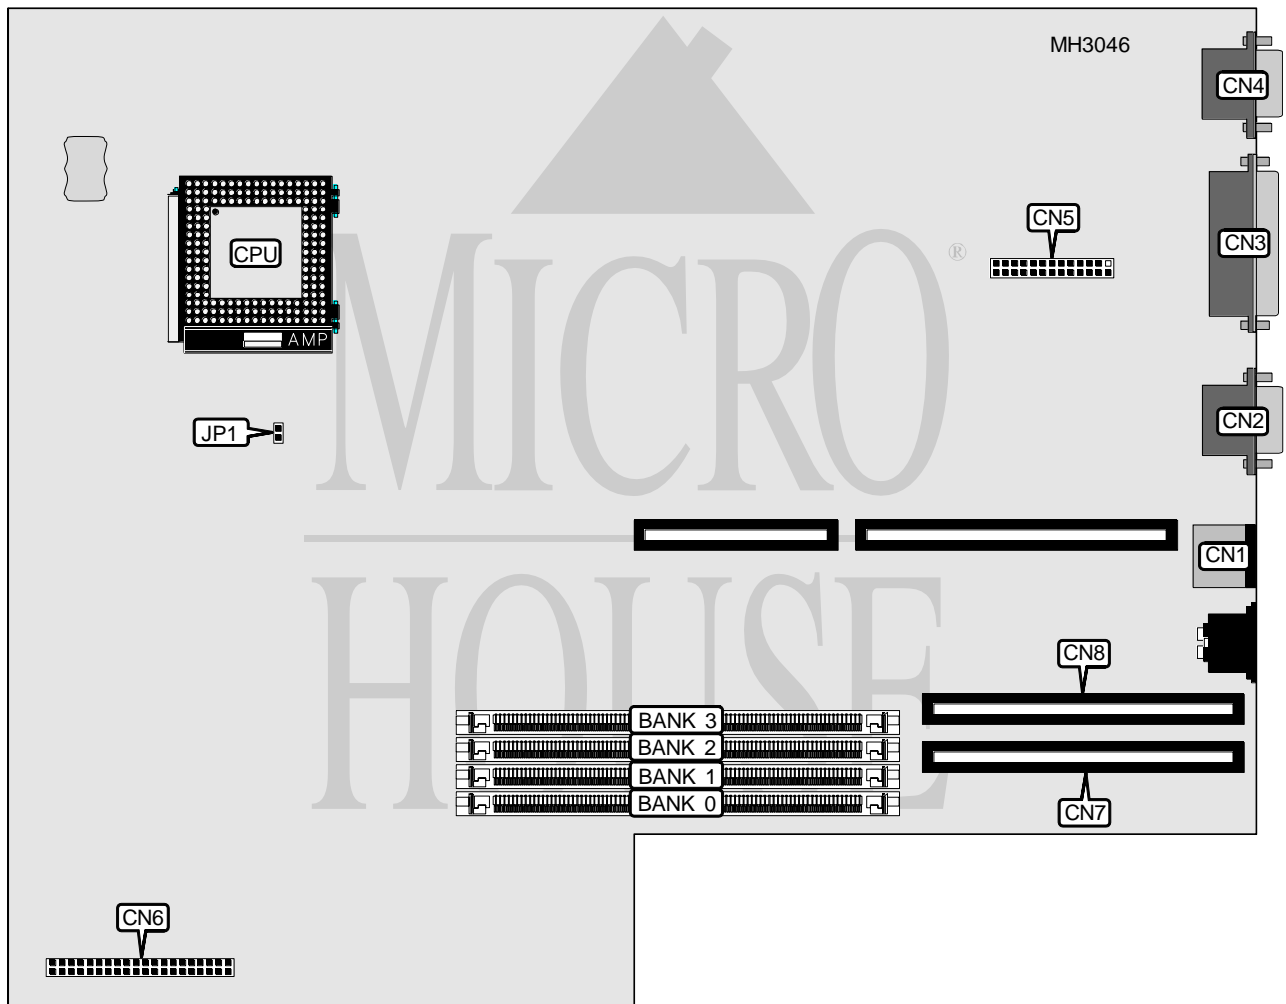

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse interface	CN1	VGA feature connector	CN5
Serial port 2	CN2	IDE interface	CN6
Parallel port	CN3	SCSI interface	CN7
Serial port 1	CN4	LAN module	CN8

Continued on next page. . .

ZENITH DATA SYSTEMS

Z - STATION II

... continued from previous page

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(1) 256K x 36	NONE	NONE	NONE
2MB	(1) 256K x 36	(1) 256K x 36	NONE	NONE
3MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	NONE
4MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
4MB	(1) 1M x 36	NONE	NONE	NONE
5MB	(1) 256K x 36	(1) 1M x 36	NONE	NONE
6MB	(1) 256K x 36	(1) 256K x 36	(1) 1M x 36	NONE
7MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	(1) 1M x 36
8MB	(1) 1M x 36	(1) 1M x 36	NONE	NONE
9MB	(1) 256K x 36	(1) 1M x 36	(1) 1M x 36	NONE
10MB	(1) 256K x 36	(1) 256K x 36	(1) 1M x 36	(1) 1M x 36
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	NONE
13MB	(1) 256K x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
16MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
16MB	(1) 4M x 36	NONE	NONE	NONE
20MB	(1) 1M x 36	(1) 4M x 36	NONE	NONE
24MB	(1) 1M x 36	(1) 1M x 36	(1) 4M x 36	NONE
32MB	(1) 4M x 36	(1) 4M x 36	NONE	NONE
40MB	(1) 1M x 36	(1) 1M x 36	(1) 4M x 36	(1) 4M x 36
48MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	NONE
64MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36

CPU SPEED CONFIGURATION	
Speed	JP1
25MHz	Open
33MHz	Closed