


ADVANCED LOGIC RESEARCH, INC.

POWERFLEX FLYER SD

Processor	80386SX/80486SX (depends on CPU card installed)
Processor Speed	20/25MHz
Chip Set	Unidentified
Max. Onboard DRAM	16MB
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA port, riser slot, CPU slot, ALR proprietary slot
NPU Options	None

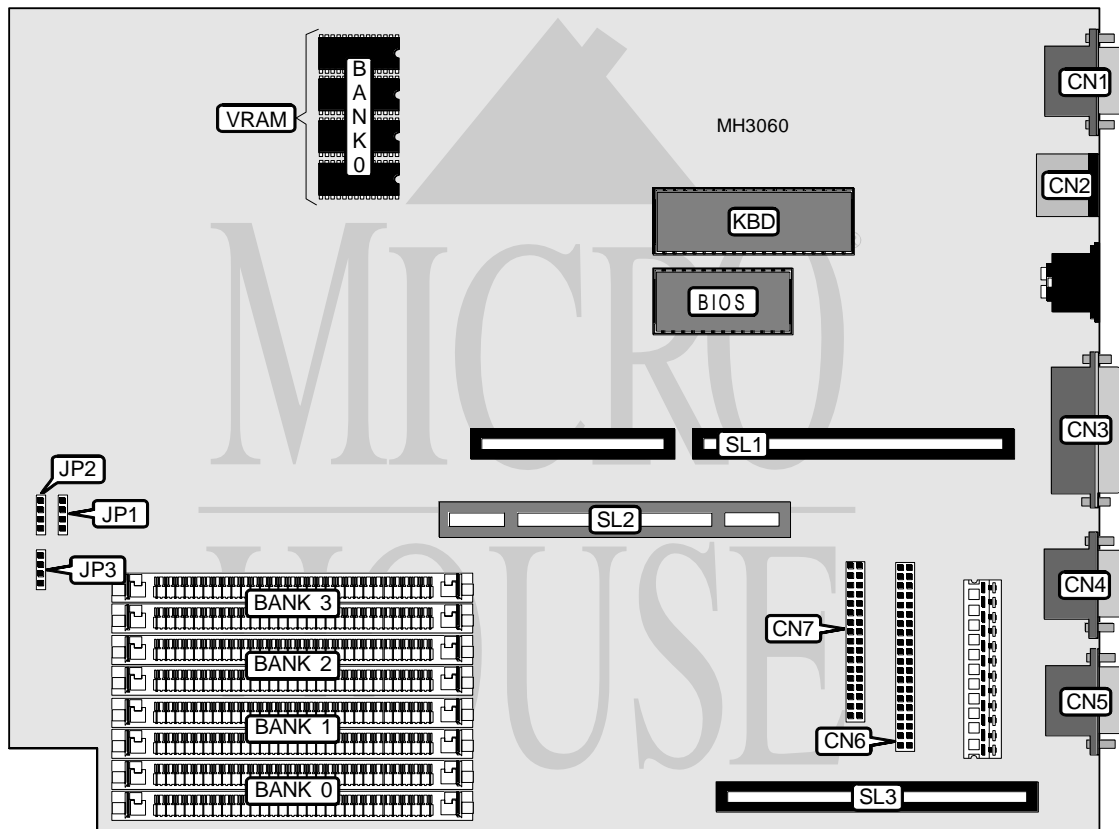

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	Speaker	JP1
PS/2 mouse port	CN2	IDE interface LED	JP2
Parallel port	CN3	Front panel connector	JP3
Serial port 2	CN4	Riser slot	SL1
Serial port 1	CN5	CPU slot	SL2
Floppy drive interface	CN6	ALR proprietary slot	SL3
IDE interface	CN7		
Note: The location of pin 1 is unidentified.			

Continued on next page. . .

ADVANCED LOGIC RESEARCH, INC. POWERFLEX FLYER SD

... continued from previous page

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
2MB	(2) 1M x 9	NONE	NONE	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
10MB	(2) 1M x 9	(2) 4M x 9	NONE	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE

VRAM CONFIGURATION
Note: The size of the VRAM is unidentified.