


# NCR CORPORATION MODEL 3225

<b>Processor</b>	80386SX (exact location unidentified)
<b>Processor Speed</b>	25/33MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Unidentified
<b>Maximum Onboard Memory</b>	16MB
<b>Maximum Video Memory</b>	1MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	391mm x 381mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA port, riser slot
<b>NPU Options</b>	80387SX (exact location unidentified)

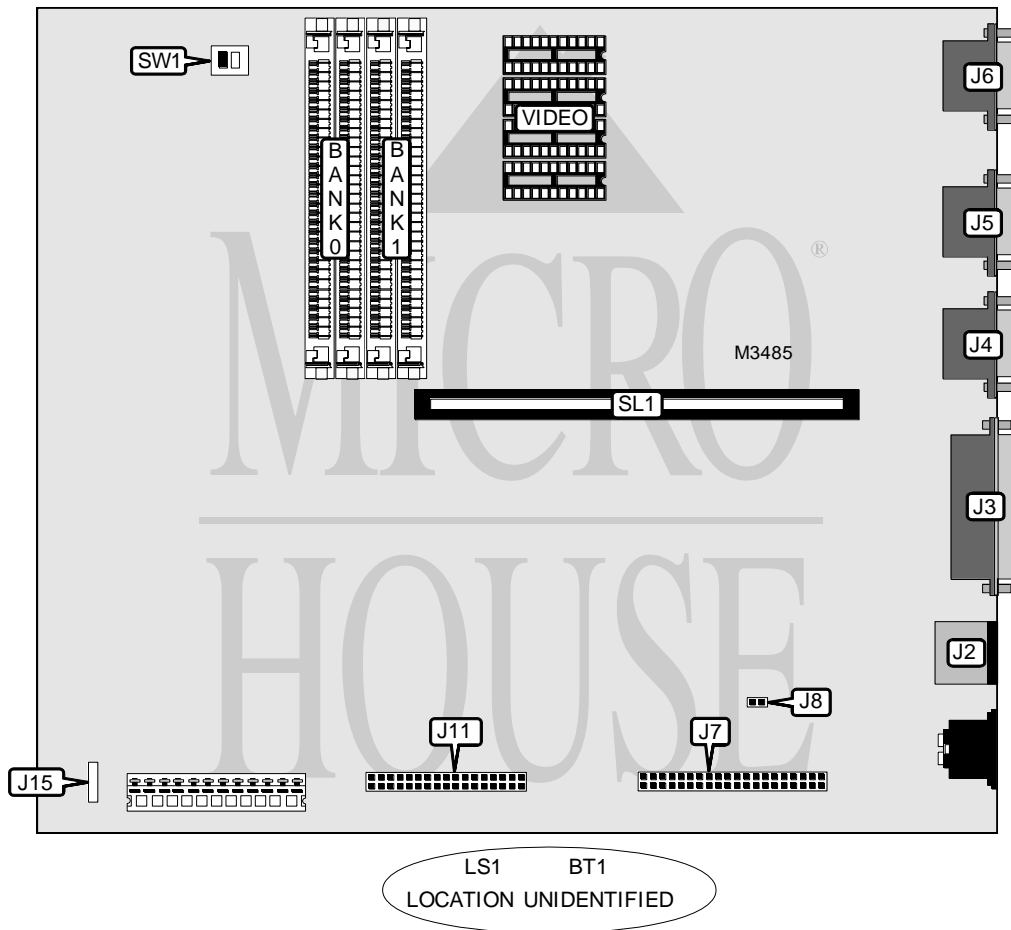

*Continued on next page. . .*

# NCR CORPORATION

## MODEL 3225

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	BT1	IDE interface	J7
PS/2 mouse port	J2	Floppy drive interface	J11
Parallel port	J3	Front panel LEDs	J15
Serial port 2	J4	Speaker	LS1
Serial port 1	J5	Riser slot	SL1
VGA port	J6		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Password normal operation	J8	Open
Password clear	J8	Closed
On board video enabled	SW1/1	On
On board video disabled	SW1/1	Off
Monitor type select color	SW1/2	On
Monitor type select monochrome	SW1/2	Off

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 1M x 9	None
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	None
16MB	(2) 4M x 9	(2) 4M x 9

VIDEO MEMORY CONFIGURATION
Note: The size of the chips for 512KB/1MB video memory is unidentified. The location of the banks is unidentified.