


# NCR CORPORATION MODEL 3314-XXXX PC486 MC/25MHZ

<b>Processor</b>	80486
<b>Processor Speed</b>	25MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Unidentified
<b>Maximum Onboard Memory</b>	16MB (on external card)
<b>Maximum Video Memory</b>	256KB
<b>Cache</b>	128KB
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	External memory card, floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial port
<b>NPU Options</b>	None

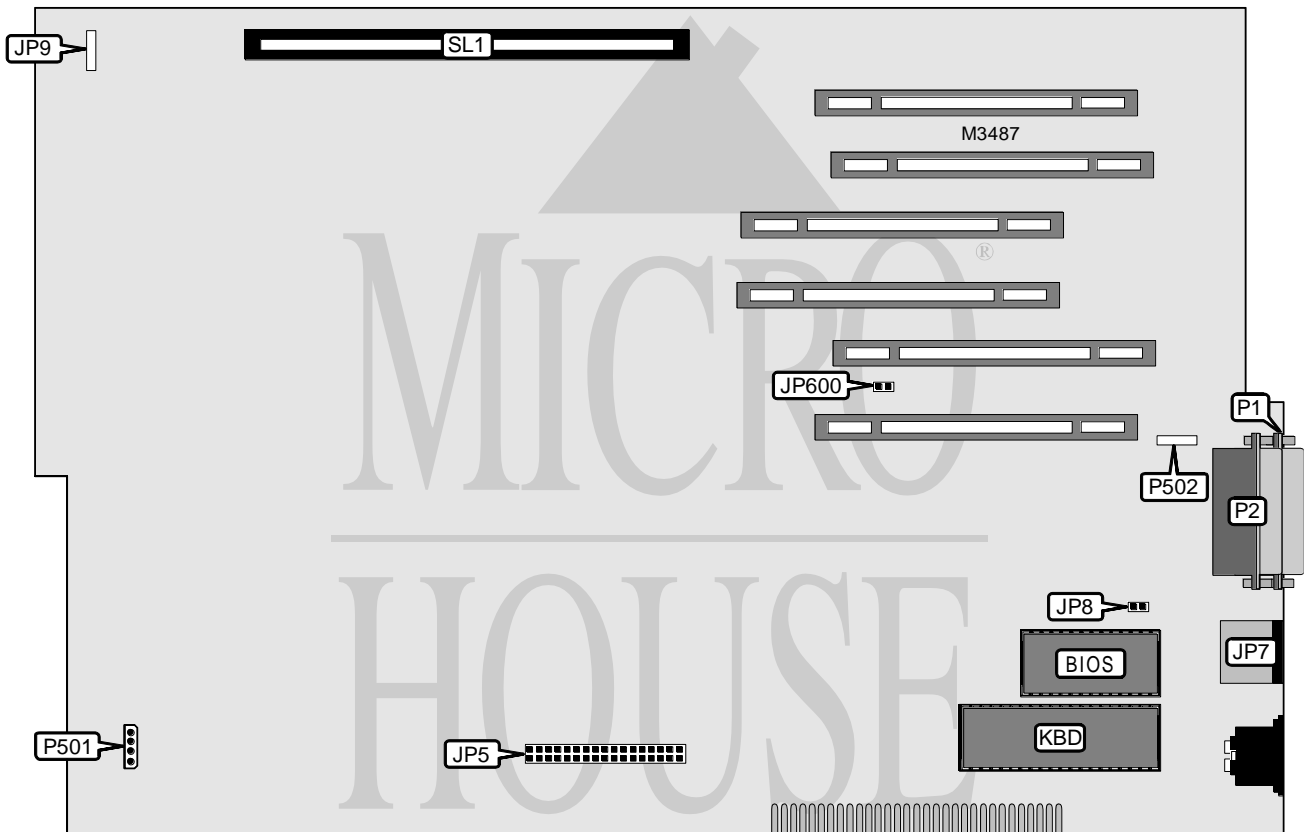

CONNECTIONS			
Purpose	Location	Purpose	Location
Floppy drive interface	JP5	Parallel port	P2
PS/2 mouse port	JP7	Drive power connector	P501
Speaker	JP9	Chassis fan power	P502
Serial port	P1	External memory card	SL1


Continued on next page . . .

# NCR CORPORATION

## MODEL 3314-XXXX PC486 MC/25MHZ

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	JP8	Open
CMOS memory clear	JP8	Closed
í NCR VGA card installed	JP600	Open
NCR VGA card not installed	JP600	Closed

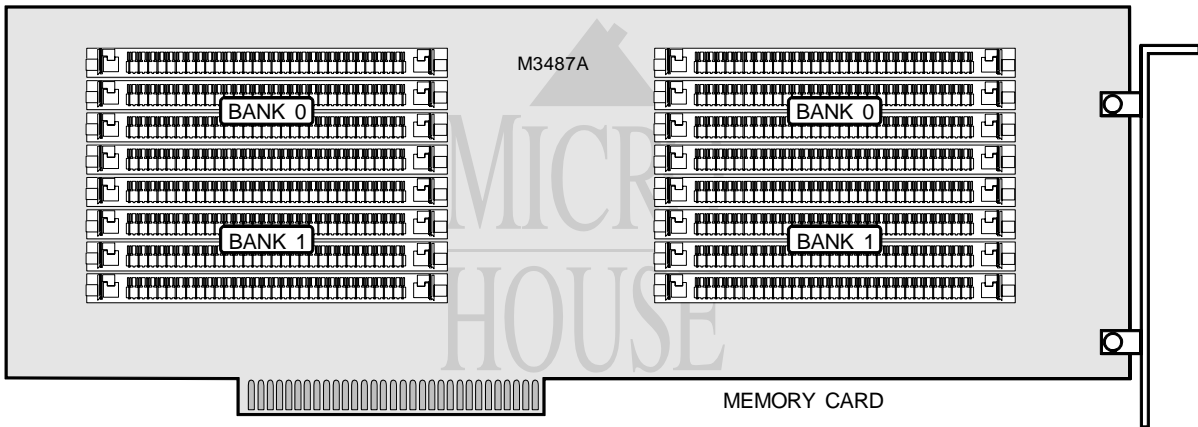

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(8) 256K x 9	None
4MB	(8) 256K x 9	(8) 256K x 9
8MB	(8) 1M x 9	None
10MB	(8) 1M x 9	(8) 256K x 9
16MB	(8) 1M x 9	(8) 1M x 9

**CACHE CONFIGURATION**  
 Note: The location of 128KB cache is unidentified.

**VIDEO MEMORY CONFIGURATION**  
 Note: The location of 256KB video memory is unidentified.