
PINE TECHNOLOGY PT-309

Processor80386SX/CX486SLCProcessor Speed16/20/25/33MHz

Chip Set Acer
Video Chip Set None
Maximum Onboard Memory 16MB
Maximum Video Memory None
Cache None
BIOS AMI

Dimensions 220mm x 170mm

I/O OptionsNoneNPU Options80387SX

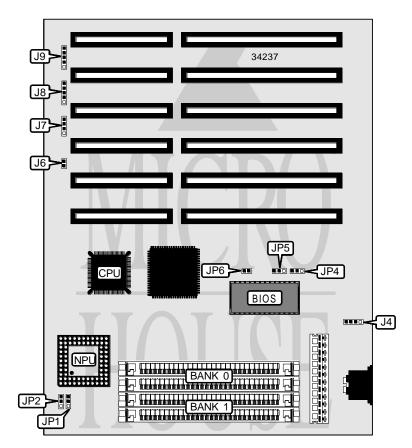

CONNECTIONS				
Purpose	Location	Purpose	Location	
External battery	J4	Turbo LED	J8/pins 1 & 2	
Reset switch	J6	Turbo switch	J8/pins 4 & 5	
Speaker	J7	Power LED & keylock	J9	

PINE TECHNOLOGY PT-309

. . . continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Label	Position		
í NPU synchronous with CPU	JP2	Pins 1 & 2 closed		
NPU asynchronous with CPU	JP2	Pins 2 & 3 closed		
í Monitor type select color	JP4	Pins 2 & 3 closed		
Monitor type select monochrome	JP4	Pins 1 & 2 closed		
Parity disabled	JP6	Closed		
Parity enabled	JP6	Open		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1		
512KB	(2) 256K x 9	None		
1MB	(2) 256K x 9	(2) 256K x 9		
2MB	(2) 1M x 9	None		
4MB	(2) 1M x 9	(2) 1M x 9		
8MB	(2) 4M x 9	None		
16MB	(2) 4M x 9	(2) 4M x 9		

CPU SPEED SELECTION				
Speed	JP1	JP5		
16MHz	Pins 1 & 2 closed	Pins 1 & 2 closed		
20MHz	Pins 2 & 3 closed	Pins 1 & 2 closed		
25MHz	Pins 1 & 2 closed	Pins 2 & 3 closed		
33MHz	Pins 2 & 3 closed	Pins 2 & 3 closed		