

PREFACE

Thank you for purchasing the 586MI system board. This document gives an aid to the configuration and installation of this system board.

The information in this document is subject to change without notice.

This document contains information protected by copyright. All rights are reserved. No part of this document may be used or reproduced in any forms or by any means, or stored in a database or retrieval system, without prior written permission.

TRADEMARKS

Intel is a registered trademark of Intel Corporation.

IBM is a registered trademark of International Business Machines Corporation.

Microsoft is a registered trademark of Microsoft Corporation.

VESA is a registered trademark of Video Electronics Standard Association.

All other trademarks used in this manual are the property of their respective owners.

TABLE OF CONTENTS

CHAPTER 1: INTRODUCTION	4
CHAPTER 2: JUMPERS & CONNECTORS	6
SYSTEM BOARD JUMPERS	6
CPU Frequency Jumpers	8
VESA Local Bus Jumpers	8
Cache Size Jumpers	9
Clear CMOS Data Jumper	9
Display Type Jumper	9
IDE Port Jumpers	10
Parallel Port Jumper	10
FLASH BIOS Jumper	10
SYSTEM BOARD CONNECTORS	11
Green PC Connector	11
Power Supply Connectors	12
Keyboard Connector	13
Power LED and Keyboard Lock Connector	13
Speaker Connector	14
Reset Connector	14
Turbo Switch Connector	15
Turbo LED Connector	15
Parallel Port Connector	16
Serial Port 1 & 2 Connectors	16
Floppy Interface Connector	17
IDE Interface Connector	18
Harddisk Activity LED Connector	18
CHAPTER 3: HARDWARE INSTALLATION	19
THE DRAM SIMMs	19
Installing DRAM SIMMs	20
INSTALLING A VL-BUS CARD	21
INSTALLING EXTERNAL I/O CARD	22
EQUIPMENT REQUIRED	23
CHAPTER 4: BIOS SETUP	24
ENTERING SETUP	24
STANDARD CMOS SETUP	26
ADVANCED CMOS SETUP	27
ADVANCED CHIPSET SETUP	29
AUTO CONFIGURATION - BIOS DEFAULTS	30
AUTO CONFIGURATION - POWER-ON DEFAULTS	30
CHANGE PASSWORD	30
AUTO DETECT HARD DISK	31
HARD DISK UTILITY	31
WRITE TO CMOS AND EXIT	32
DO NOT WRITE TO CMOS AND EXIT	32
CHAPTER 5: VL-BUS IDE DRIVERS	33
DOS DRIVER INSTALLATION	33
WINDOWS 3.1 DRIVER INSTALLATION	33
APPENDIX A: KEYBOARD SPEED SWITCH	35
APPENDIX B: AMI BIOS HARD DISK TYPE	36
APPENDIX C: MEMORY MAPPING	37
APPENDIX D: AT I/O ADDRESS MAP	38
APPENDIX E: INTERRUPT ASSIGNMENTS	40
APPENDIX F: SPECIFICATION	41

CHAPTER 1: INTRODUCTION

The 586MI system board adds to our product line high integration and cost effective solution without compromising performance and quality. All Pentium and Pentium Overdrive CPUs are supported on the 586MI system board. With top speed at 66MHz and integrated 256K/512K Write-Back cache, the 586MI dramatically boosts system throughput for even the most demanding applications.

CPU:

- Intel Pentium 60/66MHz and Pentium Overdrives.

Cache Memory:

- Supports 256K and 512K cache memory.

Main Memory:

- Supports 256Kx36, 512Kx36, 1Mx36, 2Mx36, 4Mx36, and 8Mx36 72-pin SIMM modules.
- Up to 128 MBytes on-board memory.

Slots:

- Three VESA Local Bus (VL-Bus) Master slots.
- Six 16-bit ISA bus slots.
- One 8-bit ISA bus slot.

IDE Port:

- Turbo/Normal selections for fast or slow IDE hard drives.
- Plug and play, replaces any non-intelligent IDE controller without reformatting the disk drives.
- Although not required, DOS and Windows 3.1 software drivers are provided for maximizing performance.

Floppy Disk Controller:

- Fully IBM register set compatible.
- Supports up to two 3.5-inch or 5.25-inch floppy disk drives.
- Supports 360KB / 720KB / 1.2MB / 1.44MB densities.
- Floppy Disk Controller can be disabled.

Peripherals:

- Supports two Serial ports and one Parallel port.

On-Board Battery:

- 3.6V/60mA on-board battery.

CHAPTER 2: JUMPERS & CONNECTORS




When working with the 586MI, it is extremely important that you avoid static electricity. Always ground yourself by wearing a wrist or ankle strap.

Figure 1 on the next page shows the component layout of the 586MI system board with locations of the system board jumpers and connectors. Note that most jumpers and connectors on the system board are labeled with proper names with pin 1 marked as '1'. To avoid damaging the board and to have proper operation caution should be taken when connecting these components.

SYSTEM BOARD JUMPERS

Jumpers are used to select between various operating modes. A jumper switch consists of two, three, or four gold pins projecting from the system board. Placing the plastic jumper cap over two pins connects those pins and makes a particular selection. Using the cap to cover two pins in this way is referred to as shorting those pins. If the cap is not placed on any pins at all, this is referred to as leaving the pins open.

Note: When you open a jumper, leave the plastic jumper cap attached to one of the pins so you don't lose it.

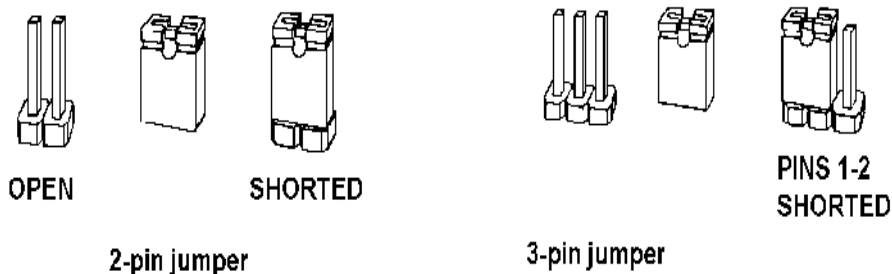


FIGURE

CPU Frequency Jumpers

CPU FREQUENCY	JO1	JO2	JO3
60.000	OPEN	SHORT	OPEN
66.667	SHORT	SHORT	OPEN
50.000	OPEN	OPEN	SHORT

Care should be taken when installing the CPU into the Pin Grid Array (PGA) socket on the system board. Make certain that pin 1 of the CPU chip is correctly aligned with pin 1 of CPU socket. The location of pin 1 on the CPU is denoted by a small notch.



VESA Local Bus Jumpers

These jumpers allow any VL-Bus adapter to identify the speed of the system board.

VL-Bus Clock Speed	JO5	JO6	JO7	JP19
33MHz (Default)	SHORT	OPEN	OPEN	OPEN
40MHz	OPEN	OPEN	OPEN	SHORT

High Speed Write	JP18
System board runs one wait state write transfer. All VL-Bus adapters can operate in this mode.	SHORT (Default)
System board runs zero wait state write transfer. Some VL-Bus adapters may not be able to run this mode.	OPEN

Cache Size Jumpers

Cache Size Jumper Selection

Cache Size	JP1	JP2	JP3	JP4	JP5	JP6
64KB	1-2	1-2	1-2	OPEN	OPEN	OPEN
128KB	2-3	2-3	2-3	OPEN	OPEN	SHORT
256KB	1-2	1-2	1-2	OPEN	SHOR T	SHORT
512KB	2-3	2-3	2-3	SHOR T	SHOR T	SHORT

Cache Size and SRAM Locations

Cache Size	Data Bank 0 U3 to U10	Data Bank 1 U18 to U25
64KB	8Kx8	None
128KB	8Kx8	8Kx8
256KB	32Kx8	None
512KB	32Kx8	32Kx8

Clear CMOS Data Jumper

The CMOS jumper JP15 is used to clear the system configuration data currently stored in the CMOS RAM. All system setup information (hard disk type, date/time, etc...), stored in the CMOS, will be destroyed. This function would be useful if you were to forget the user password for the system.

Function	JP15
Normal CMOS Operation	2-3 (Default)
Clear CMOS Data	1-2

Display Type Jumper

Display Type	JP14
Video display is VGA, EGA, or Monochrome.	OPEN (Default)
Video display is CGA.	SHORT

IDE Port Jumpers

IDE Enable/Disable	JP30
Enable on-board VL-Bus IDE port.	OPEN (Default)
Disable on-board VL-Bus IDE port.	SHORT

VL-Bus IDE Recovery Time	JP2 1	JP2 2	JP2 3
Speed 0: High speed IDE hard disk. (Default Setting)	2-3	2-3	2-3
Speed 1: Medium speed IDE hard disk.	1-2	2-3	2-3
Speed 2: Slow speed IDE hard disk.	2-3	1-2	2-3

Parallel Port Jumper

Parallel Port	JP32
Select interrupt line IRQ7 for Parallel port.	1-2 (Default)
Select interrupt line IRQ5 for Parallel port.	2-3

FLASH BIOS Jumper

FLASH BIOS Control	JP13
Disable FLASH (optional) programming. This is normal operation.	OPEN (Default)
Enable FLASH BIOS programming. Contents of system board BIOS can be re-programmed.	2-3

SYSTEM BOARD CONNECTORS


Green PC Connector

The Green PC connector can be used for power saving. Green PC feature is optional and can be enabled with special Megakey keyboard controller and BIOS.

Descriptions	W1 pins	W1 pins	Descriptions
No Connection.	1	6	Keyboard P12 to control video card VSYNC. This pin should be connected to pin 12 of VGA Feature connector.
Keyboard P12 to enable/disable video signals. This pin should be connected to pin 18 of VGA Feature connector.	2	7	Keyboard P13 to control video card HSYNC. This pin should be connected to pin 11 of VGA Feature connector.
Keyboard P13 (General Purpose). When this pin is at low level, it can switch other system device to stand-by mode for saving power.	3	8	No Connection.
Keyboard P15 (General Purpose). When this pin is at low level, it can switch other system device to stand-by mode for saving power.	4	9	No Connection.
Ground	5	10	No Connection.

Power Supply Connectors

The two Power Supply connectors are 6-pin AT standard power connectors. Most power supplies have two six-wire connectors, two of the wires on each connector are black. Align the two six-wire connectors so that the two black wires on each connector are in the middle as shown below.



Pin	Connector PS1	Connector PS2
1	Power Good	Ground
2	+5 VDC	Ground
3	+12 VDC	-5 VDC
4	-12 VDC	+5 VDC
5	Ground	+5 VDC
6	Ground	+5 VDC

Keyboard Connector

The keyboard connector is a 5-pin, circular-type DIN socket. It is used to connect the system board keyboard interface to any standard AT-compatible keyboard (84 or 101 -key type keyboards). The pin assignments are listed below:

Pin	Description
1	Keyboard Clock Signal
2	Keyboard Data Signal
3	Not Used
4	Ground
5	+5V Fused VDC

Power LED and Keyboard Lock Connector


The Power LED and Keyboard Lock connector (KEYLOCK) is 5-pin keyed BERG strip. It is used to connect +5 VDC power to the power indicator LED at the front panel and connect security keyboard lock to the keyboard controller. This allows you to switch off the keyboard and so provide limited security against casual intruders. The pin assignments are indicated below:

Pin	Description
1	LED Power
2	Key (No Connection)
3	Ground
4	Keyboard Lock
5	Ground

Speaker Connector

The Speaker connector (SPKR) is a 4-pin keyed BERG strip. It is used to connect an external 2-inch, 8-ohm speaker to the system board to provide sound capability. The pin assignments are defined below:

Pin	Description
1	Speaker Data Out
2	Key (No Connection)
3	Ground
4	+5 VDC

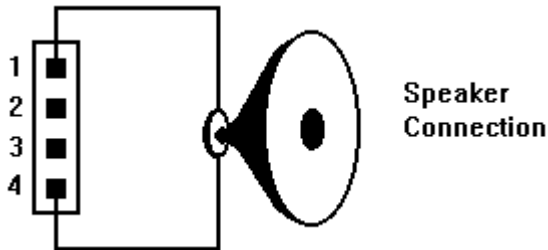

Reset Connector

The system RESET connector (RESET) is a 2-pin BERG strip. It is used to connect the push button reset switch located on the front panel to the system board. System reset can be done by shorting pin 1 to pin 2 with the same effect as turning the power off and then on again.

Pin	Description
1	Ground
2	Reset Input

Turbo Switch Connector

The Turbo switch (TURBO) is a 2-pin BERG strip. It is used to connect the front panel 2-position push switch to the system board speed switching circuitry.

Pin	Description
1	Turbo Speed
2	Ground

Notes:

- System runs at Turbo speed when pins 1 and 2 are shorted.
- System runs at Slow speed when pins 1 and 2 are open.

Turbo LED Connector

The Turbo LED connector, marked as 'TB/LED', is a 2-pin BERG strip. It is used to connect a CPU operating frequency indicator LED from the front panel to the system board. The pin assignments are indicated below:

Pin	Description
1	LED Anode
2	LED Cathode

Parallel Port Connector

The on-board parallel port connector (PARALL) is a 2x13-pin male header connector. The pin assignment is shown below:

Pin	Description	Pin	Description
1	-STROBE	14	-AUTO FEED XT
2	Data Bit 0	15	-ERROR
3	Data Bit 1	16	-INIT
4	Data Bit 2	17	-SLCT IN
5	Data Bit 3	18	Ground
6	Data Bit 4	19	Ground
7	Data Bit 5	20	Ground
8	Data Bit 6	21	Ground
9	Data Bit 7	22	Ground
10	-ACK	23	Ground
11	-BUSY	24	Ground
12	PE	25	Ground
13	SLCT	26	No Connection

Serial Port 1 & 2 Connectors

The serial port 1 and 2 connectors are the 2x5-pin male headers COM1 and COM2. Users should use a flex cable with a 9 or 25 -pin male D-subminiature receptacle at one end and a 2x5-pin female header at the other end to provide RS-232 serial interface. COM1 and COM2 addresses are automatically selected by on-board BIOS. If there is an external Serial port adapter with COM1(3F8) and COM2(2F8), the on-board Serial port addresses will be changed to COM3(3E8) and COM4(2E8) automatically. The pin assignment for COM1/COM2 is defined below:

Pin	Description	Pin	Description
1	Carrier Detect (RLSD)	6	Receive Data (RXD)
2	Transmit Data (TXD)	7	Data Terminal Ready (DTR)
3	Signal Ground	8	Data Set Ready (DSR)
4	Request To Send (RTS)	9	Clear To Send (CTS)
5	Ring Indicator (RI)	10	No Connection

Floppy Interface Connector

The on-board Floppy Interface connector (FLOPPY) is a 2x17-pin male header. This interface supports two 5.25" or 3.5" floppy drives in any combination and also can be disabled if no floppy drives are present on the system.

Pin	Description	Pin	Description
2	RPM	1	Ground
4	No Connection	3	Ground
6	No Connection	5	Ground
8	Index	7	Ground
10	Motor 1	9	Ground
12	Drive 2	11	Ground
14	Drive 1	13	Ground
16	Motor 2	15	Ground
18	Direction	17	Ground
20	Step	19	Ground
22	Write Data	21	Ground
24	Write Enable	23	Ground
26	Track0	25	Ground
28	Write Protect	27	Ground
30	Read Data	29	Ground
32	Head Select	31	Ground
34	Disk Change	33	Ground

IDE Interface Connector

The on-board IDE Interface connector (IDE) is a 2x20-pin male header. This interface supports up to two IDE hard disk drives on the system. This interface can also be disabled in the event that no hard drive is present or a separate hard drive controller is installed on the system.

Pin	Description	Pin	Description
2	Ground	1	IDE Reset/
4	Data 8	3	Data 7
6	Data 9	5	Data 6
8	Data 10	7	Data 5
10	Data 11	9	Data 4
12	Data 12	11	Data 3
14	Data 13	13	Data 2
16	Data 14	15	Data 1
18	Data 15	17	Data 0
20	No Connection	19	Ground
22	Ground	21	No Connection
24	Ground	23	I/O Write/
26	Ground	25	I/O Read/
28	ALE	27	No Connection
30	Ground	29	No Connection
32	IOCS16/	31	IDE IRQ 14
34	No Connection	33	Address A1
36	Address A2	35	Address A0
38	IDE Chip Select 1/	37	IDE Chip Select 0/
40	Ground	39	IDE Active/

Harddisk Activity LED Connector

The hard disk activity LED connector (label as "HDLED") is a 2-pin keyed BERG strip. It is used to connect to front panel hard disk LED.

Pin	Description
1	LED Anode (+)
2	LED Cathode (-)

CHAPTER 3: HARDWARE INSTALLATION

THE DRAM SIMMs

The on-board DRAM memory subsystem has four module mounting sockets which are divided into "banks" of two sockets each. Sockets labeled SIM1 and SIM2 constitute bank 0. Sockets labeled SIM3 and SIM4 constitute bank 1. They support 256Kx36, 512Kx36, 1Mx36, 2Mx36, 4Mx36, and 8Mx36 DRAM SIMMs. DRAM speed must be 60ns or 70ns. You can configure the memory of the 586MI in a variety of ways as shown below.

Total Memory	SIM1 & SIM2	SIM3 & SIM4
2MB	256Kx36	None
4MB	256Kx36	256Kx36
6MB	256Kx36	512Kx36
10MB	256Kx36	1Mx36
18MB	256Kx36	2Mx36
34MB	256Kx36	4Mx36
66MB	256Kx36	8Mx36
4MB	512Kx36	None
8MB	512Kx36	512Kx36
12MB	512Kx36	1Mx36
20MB	512Kx36	2Mx36
36MB	512Kx36	4Mx36
68MB	512Kx36	8Mx36
8MB	1Mx36	None
16MB	1Mx36	1Mx36
24MB	1Mx36	2Mx36
40MB	1Mx36	4Mx36
72MB	1Mx36	8Mx36
16MB	2Mx36	None
32MB	2Mx36	2Mx36
48MB	2Mx36	4Mx36
80MB	2Mx36	8Mx36
32MB	4Mx36	None
64MB	4Mx36	4Mx36
96MB	4Mx36	8Mx36
64MB	8Mx36	None
128MB	8Mx36	8Mx36


Installing DRAM SIMMs



When working with DRAM SIMMs, it is extremely important that you avoid static electricity. Always ground yourself by wearing a wrist or ankle strap.

1. The SIMM module should face to the right with pin 72 next to the power supply connectors.
2. Insert the SIMM at a 45 degree angle, tilted towards ISA slots.


3. Gently push the SIMM to an upright position until it "snaps" into place.
4. Repeat above steps until the entire bank is filled.

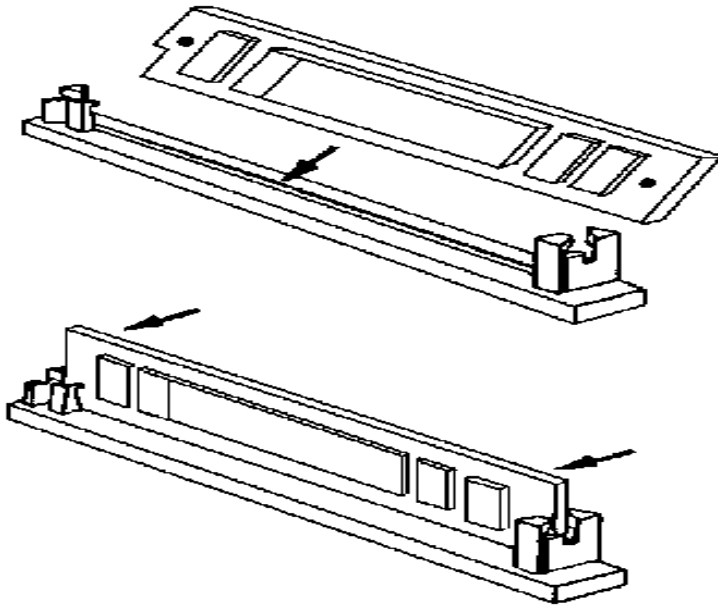

INSTALLING A VL-BUS CARD

Carefully follow these steps to install a VL-Bus card:

1. Turn off your computer and unplug the power cord.
2. Turn off the power to all peripheral devices, such as your printer.
3. Disconnect the cables from the back of the system in order to give more room to work. Note how all cables are connected prior to disconnection.
4. Remove the computer's cover.
5. Choose an unused VL-Bus slot.
6. Setting the VL-Bus card according to its user's manual.
7. Holding the card at the center of the top edge, gently push straight down with equal pressure at both ends.
8. Replace the screw to hold the card into place.
9. Replace and secure the system cover.
10. Reconnect all the wires and cables.

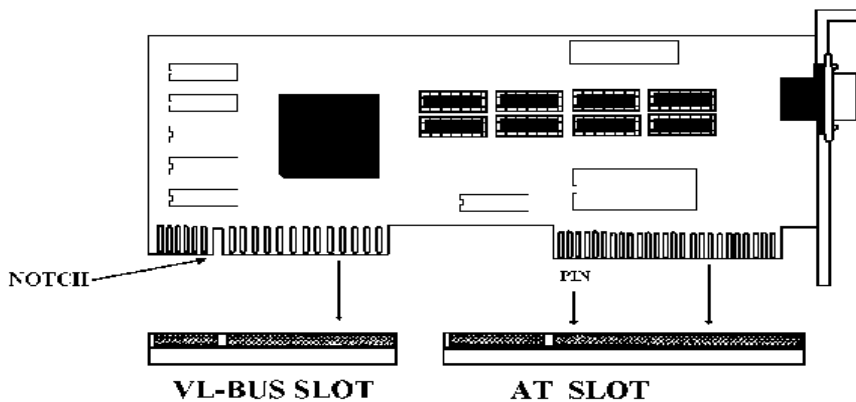

INSTALLING EXTERNAL I/O CARD

The BIOS on 586MI automatically detects external I/O devices. It will arrange the on-board I/O addresses accordingly to prevent any address conflict.

Serial Ports:

The on-board Serial port 1 (labeled as COM1) address can be set to 3F8(COM1), 3E8(COM3), or Disabled.

The on-board Serial port 2 (labeled as COM2) address can be set to 2F8(COM2), 2E8(COM4), or Disabled.

The 586MI BIOS can detect external Serial port addresses and sets different addresses for the on-board Serial ports or disables them entirely. User's responsibility is to select the Serial port addresses on the external I/O card. There are no jumpers on 586MI to be changed.

Parallel Ports:

The on-board Parallel port (labeled as PARALL) address can be set to 378(LPT1), 278(LPT2), or Disabled.

The 586MI BIOS can detect external Parallel port addresses and sets different address for the on-board Parallel port or disables it. User's responsibility is to select the Parallel port address on the external I/O card. There are no jumpers on 586MI to be changed.

Game Port:

If an external Game port is installed and enabled, the on-board Game port will be disabled.

IDE/Floppy Ports:

If there is an external IDE and Floppy card installed, the on-board IDE and Floppy ports will be disabled automatically.

User's responsibility is to short jumper JP30 on 586MI.

EQUIPMENT REQUIRED

The dimension of the 586MI system board is designed to fit perfectly in a PC/XT (or PC/AT) standard case. To build a complete high performance system based on the 586MI system board, the following equipment are needed:

A chassis with dimension similar to PC/XT/AT standard chassis.

A standard AT 220W power supply which is capable to provide a continuous power within a +4.85 VDC to +5.25 VDC range. A power line filter may be needed for areas with noisy transmission.

A 2-inch, 8-Ohm speaker to provide sound capability.

A 2-position switch with a 2-pin connector for speed function.

A push button switch with 2-pin connector for reset function.

One floppy drive (360K or 1.2M or 1.44M).

Hard disk drive.

A set of flat cables for floppy drive and hard disk drive.

A VL-Bus video card (Monochrome, CGA, EGA, VGA).

A set of flat cables for floppy drive and hard disk drive.

An AT-compatible keyboard (84 or 101 Keyboard) with cable.

A video display monitor.

Following additional equipment will be useful to enhance the system:

A bus or serial mouse.

A tape pack up drive.

UPDATED BIOS SETUP FOR 586MI BIOS V1.1

You need to setup a system once every time:

- You start a new and unconfigured system.
- You receive a start-up error message indicating the configuration information stored in the non-volatile CMOS RAM has somehow become corrupted.
- You add, remove or change peripherals from your system.

The first time you power up the system, the configuration information stored in the battery-backed CMOS RAM may not be correct. The BIOS detects this condition and prompts user to go through the SETUP section. This chapter explains how to use the BIOS SETUP program and make the appropriate entries.



Some of the parameters are already factory preset and do not need to be changed. Please read the instructions carefully and only change the settings if necessary.

ENTERING SETUP

1. Reset the system by turning it OFF then ON or pushing the "RESET" button on the system front panel.
2. Hit the key momentarily as soon as the following message appears:

"Hit , if you want to run SETUP"

3. After you press the key, the following BIOS Setup screen appears:

AMI BIOS SETUP PROGRAM - BIOS SETUP UTILITIES
(C) 1992 American Megatrends Inc., All Rights Reserved

STANDARD CMOS SETUP
ADVANCED CMOS SETUP
ADVANCED CHIPSET SETUP
POWER MANAGEMENT SETUP
PERIPHERAL MANAGEMENT SETUP
AUTO CONFIGURATION WITH BIOS DEFAULTS
AUTO CONFIGURATION WITH POWER-ON DEFAULTS
CHANGE PASSWORD
AUTO DETECT HARD DISK
HARD DISK UTILITY
WRITE TO CMOS AND EXIT
DO NOT WRITE TO CMOS AND EXIT

Standard CMOS Setup for Changing Time, Date, Hard Disk Type, etc.

ESC: Exit ↓→←: Sel F2/F3: Color F10: Save & Exit

4. Choose an option and press <Enter>. Modify the system parameters to reflect the options installed in the system.
5. Press <Esc> at anytime to return to the Main Menu.
6. In the Main Menu, choose "**WRITE TO CMOS AND EXIT**" to save your changes and reboot the system. Choosing "**DO NOT WRITE TO CMOS AND EXIT**" ignores your changes and exits the BIOS SETUP program. In each setup screen, the following common keyboard controls may be used:

<F1>	: Help
<F2>, <F3>	: Color (to change screen color)
<F5>	: Old Setup Values
<F6>	: BIOS Setup Default Values
<F7>	: Power On Default Values
<ESC>	: Exit Setup Section
Arrow Keys	: Select Setup Item
<PG UP/ PG DN>	: Modify the Setup Item

STANDARD CMOS SETUP

Use the standard CMOS Setup screen to check or modify general configuration information such as the date, time, floppy type, hard disk type, video type, etc.

- **Date** (Month/Date/Year): On the bottom right corner of the screen, a calendar has been provided for user. You manually set the electronic calendar only if the values are incorrect.
- **Time** (Hour/Minute/Second): The time here is 24-hour time. You would enter 5:30 P.M. as 17:30:00.
- **Hard Disk C:/D: Type**: The BIOS provides 46 predefined types of popular hard disk drives. Relevant specifications include the number of cylinders and heads, write pre-compensation time, read/write head landing zone, number of sectors per track. A hard disk will not work properly if you enter incorrect drive parameters.

If your particular drive is not one of the 46 pre-defined types, simply scroll down to select type 47 and enter the appropriate values for **cylinders**, **heads**, **WPcom**, **LZone**, and **sectors**. **Size** is automatically determined by the other entries. You can also let the BIOS to determine the drive type by selecting "**AUTO DETECT HARD DISK**" from the Main Menu.

- **Floppy Drive A: Type**: Specify the type of the first floppy drive installed on the system. 'Not Installed' could be used as an option for diskless workstations.
- **Floppy Drive B: Type**: Specify the type of the second floppy drive installed on the system.
- **Primary Display Monitor** (Color 40x25, Color 80x25, VGA/PGA/EGA, Monochrome): The 'Not Installed' option could be used for network file servers.
- **Keyboard**: Default is "Installed". "Not Installed" allows your system to operate without keyboard.

After all selections have been done, press <**Esc**> key to exit this section.

ADVANCED CMOS SETUP

"ADVANCED CMOS SETUP" lists some system features that allows you to fine tune your system setup.

- **Typematic Rate Programming:** Choose Enabled or Disabled. Enable this option to adjust the keystroke repeat rate. Adjust the rate via Typematic Rate Delay and Typematic Rate.
- **Typematic Rate Delay:** Choose the delay between holding down a key and when the character begins repeating. Default is 500milliseconds.
- **Typematic Rate:** Choose the rate a character keeps repeating. Default is 15 characters per second.
- **Above 1MB Memory Test:** Default is "Disabled" to speed up power-on initialization process and the BIOS will only test the extended memory every 32K locations only to determine the on-board memory size.
- **Memory Test Tick Sound:** Default is "Enabled" for the ticking sound during memory test.
- **Memory Parity Error Check:** Default is "Enabled" to test for transmission errors in data read from memory.
- **Hard Disk Type 47 RAM Area:** The BIOS uses this area to store extended information, such as user definable drive type 47.

There are two options:

Default option is **0:300** in lower system RAM

DOS 1KB in the top 1KB of the 640KB DOS base memory

- **System Boot Up NumLock:** When the computer boots, it selects the numeric values rather than the cursor control functions on the numeric keypad of IBM compatible keyboards. Most extended compatible keyboards have separate cursor control keys. It is therefore unnecessary to use the numeric keypad for this. The default setting is "On".
- **Floppy Drive Seek At Boot:** Default is "Disabled". On this setting the system will check the hard disk first to find the disk operating system. This option also allows the user to run the system without a floppy disk drive.
- **System Boot-Up Sequence:** If "A:, C:" (default), the BIOS will look for bootable operating system files from floppy drive A: first before looking for them in drive C:. You can reverse this sequence by selecting "C:, A:".
- **Cache Memory:** Select "Both" to turn on both CPU internal cache and system board external cache.
- **Password Checking Option:** Choose "Setup" or "Always". default setting is "Setup". The password feature can be used to prevent unauthorized system boot-up or unauthorized use of BIOS SETUP.

"Always" Each time the system is turned on, the pass word prompt appears.

"Setup" If there is a password set, the Password prompt only appears if you attempt to enter the BIOS Setup program. If there is no set password, the Password Checking Option is disabled. You create a password by using "CHANGE PASSWORD" in the Main Menu.

- **Video ROM Shadow C000/C400, 32K:** Shadowing helps to speed up BIOS access by copying BIOS code to fast 32-bit RAM area and executes it from there. The default setting is "Enabled".
- **Adapter ROM Shadow:** Default setting is "Disabled". If you have other expansion cards with ROMs on them such as SCSI controller, you will need to know which addresses the ROMs use.
- **Boot Sector Virus Protection:** Select 'Enabled' to protect the Boot sector of your hard disk from software virus such as "Michael Angelo".

- **IDE Block Mode Transfer:** Some latest IDE hard disks support multiple sector (Block Mode) transfer for faster performance. Users select "Enabled" to take advantage of this feature. If your system hard disk supports Block Mode, BIOS message "Block Mode Enabled" will appear during boot-up.
- **Auto Key-Lock Timeout:** Default is "Disabled". Keyboard will lock up to prevent unauthorized access after an idle period from 1 to 15 minutes. This feature is enabled by setting up system Password and selecting number of minutes.

ADVANCED CHIPSET SETUP

- **DRAM Hidden Refresh:** Select "Enabled" to maximize system performance. Select "Disabled" to slow down the system.
- **512K to 640K DRAM:** Select "Disabled" for some ISA adapters that reserve this address area for their specific requirements. Normally select "Enabled".
- **Cache Read Burst Mode, Cache Write Burst Mode:** Select these options according to table below:

Cache Size	Read Burst	Write Burst
256KB	5-4-4-4	5-3-3-3
512KB	5-4-4-4	5-3-3-3

- **DRAM Region A/B Control Mode:** There are 4 selections as shown below.

Disabled: Disable this option. All DRAMs are on-board.

Hole: Allow a memory hole for adapter card usage.

Wr-Thru: Memory in this area is write-through cached.

Non-Cache: Memory in this area is not cached.

- **DRAM A/B Region Size:** Region block sizes are 512KB, 1MB, 2MB, or 4MB.
- **DRAM A/B Region Base:** This option defines starting address of DRAM region from 0 to 128MB.

- **Video BIOS Area Cacheable:** Normally select "Enabled". There are some very rare cases that Video BIOS should not be cached such as the situation where Video BIOS is directly accessed through local bus.

POWER MANAGEMENT SETUP

The Power Management Setup provides a programming way to slow down CPU clock speed and put other system devices such as Video Monitor into power saving mode.

There are four software timers internal to the MEGAKEY keyboard controller that perform power management. These timers are initialized by BIOS with user-defined time-out values from 1 to 255 minutes. The I/O pins that are associated with each timer are hardware design-specific and are defined as connector W1 on the motherboard. Please refer to Chapter 2 for detailed description of these connectors.

CPU and Green PC devices connected to W1 will go in to power saving mode if the keyboard is not used by user for a period of time programmed through this BIOS option.

- **CPU CLOCK SLOW DOWN:** Normally select "Disabled". Select from 1 minute to 255 minutes to enable CPU power saving mode.
- **W1-PIN 2 AND PIN 6:** Normally select "Disabled". Select from 1 minute to 255 minutes to enable Video Monitor power saving mode. Use the enclosed 3-wire "rainbow" cable to connect W1-pin2 or pin 6 to the Video card Feature connector pin 18. Some video card may not support 26-pin Feature connector.
- **W1-PIN 3, 7 AND 4:** Normally select "Disabled". Select from 1 minute to 255 minutes to enable other peripheral power saving mode.

PERIPHERAL MANAGEMENT SETUP

This section allows user to setup the 586MI on-board I/O peripheral devices.

- **Programming Option:** Normally select "Auto" so all of the selections below will assume their default values.
- **On-Board Floppy Drive:** User should only select 'Disabled' for a diskless workstation or when an external floppy controller card is present. Default is "Enabled".
- **On-Board IDE Drive:** User should only select 'Disabled' for a diskless workstation or when an external hard disk controller card is present. Default is "Enabled".
- **First Serial Port Address:** Select an appropriate address as shown below. Select 'Disabled' if an external serial port adapter is present with the same address. Default is "3F8".

COM1: 3F8 (default)
COM3: 3E8

- **Second Serial Port Address:** Select an appropriate address as shown below. Select 'Disabled' if an external serial port adapter is present with the same address. Default is "2F8".

COM2: 2F8 (default)
COM4: 2E8

- **Parallel Port Address:** Select an appropriate address as shown below. Select 'Disabled' if an external Parallel port adapter is present with the same address.

378 (default) 2-3
278 2-3

AUTO CONFIGURATION WITH BIOS DEFAULTS

Use this option to load the default configuration values directly from ROM. If the stored record created by the Setup program becomes corrupted, these defaults will load automatically when you turn the computer on.

AUTO CONFIGURATION WITH POWER-ON DEFAULTS

Use this option to load the settings detected by the system when you turn it on. If your system behaves erratically you can use this feature to check for incorrect settings.

CHANGE PASSWORD

Follow these steps to change system password. Note that the pass word cannot be longer than 6 characters.

1. Choose "CHANGE PASSWORD" from the Setup Main Menu and press <**Enter**>.
2. If this option has never been used, the screen will display the following message.

Enter NEW Password:

If you want to disable the password option, just press <**Enter**> key to return to the Main Menu.

3. If this option has been used to enter the password, the screen will display the following message:

Enter Current Password:

Enter the current password (default is AMI) and follow the screen instructions to change the password.

4. After you correctly enter the current password, the following message appears prompting you for the new password.

Enter NEW Password:

5. Enter the new password and the following message appears:

Re-Enter NEW Password:

6. Re-enter the new password. If the password is miskeyed, the following error message appears:

ERROR, Press Any Key...

If the password is keyed in correctly the following confirmation message appears:

NEW Password Installed

7. Press <Esc> to exit to the Main Menu.

AUTO DETECT HARD DISK

Use this BIOS utility to automatically detect popular IDE hard disk type if it is not readily available. It is not guaranteed that this utility will work with all IDE hard disk. There is no need to use this utility if you already have hard disk type information.

HARD DISK UTILITY

Use this option to do low-level harddisk format, Auto-Interleave and Media-Analysis of your MFM harddisk drive. IDE, ESDI, and SCSI drives don't need this utility and you should not use it on them.

Low-level **harddisk format** should be done for new harddisks and should be done yearly for used harddisks. This format function allows you to format the entire disk or a part of the disk. **Warning! All data on the harddisk may be lost after a low-level format.**

With **Auto-Interleave** you need not speculate about the value of the interleave factor while entering the parameters for format. This function determines the optimum interleave factor for the best disk performance.

Media Analysis does a comprehensive analysis of the harddisk surface to find out bad patches on your harddisk. This leaves the surface of the harddisk formatted with bad tracks marked bad.

WRITE TO CMOS AND EXIT

After you have made any changes during setup, use this option to store those new information into non-volatile CMOS memory. The system should reboot with the correct system board configuration.

DO NOT WRITE TO CMOS AND EXIT

After you have/have not made any changes during setup and decided not to store those information into non-volatile CMOS memory, use this option to exit Setup. The system should reboot with the current configuration stored in CMOS memory.

KEYBOARD HOT KEYS

SYSTEM SECURITY LOCKING

The default hot key sequence is **<Ctrl> <Alt> <Backspace>**. When the System Password feature is enabled in BIOS Setup, the user can invoke this feature at any time by pressing this key sequence. This feature is useful for preventing unauthorized access to the system. Once system locking is invoked, the keyboard does not accept anything from the keyboard until the correct password is entered. The Num Lock, Caps Lock, and Scroll Lock LEDs blink when the system is password locked.

SYSTEM POWER DOWN MODE

Pressing **<Ctrl> <Alt> <I>** key sequence puts the system into immediate power down mode. This hot key sequence is active if the Green PC system power saving mode is enabled in BIOS Setup.

PASSWORD STATE

The table below lists the Green PC (power saving) hot key sequence and the state of Password in various modes.

System Condition	Information
The password feature is enabled through BIOS Setup and the <Ctrl> <Alt> <Backspace> hot key sequence is pressed.	The Keyboard Num Lock, Caps Lock, and Scroll Lock LEDs blink until the correct password is entered via keyboard.
The password feature is enabled through BIOS Setup and the <Ctrl> <Alt> <I> hot key sequence is pressed to invoke immediate power down mode.	Same as above.
Both the Green PC power savings feature and the password feature are enabled. The system goes to power down state after the time-out period expires.	Same as above.
The Green PC power savings feature is enabled through BIOS Setup, Password is disabled and the <Ctrl> <Alt> <I> key sequence is pressed.	Press any key for full power operation.

CHAPTER 5: VL-BUS IDE DRIVERS

In the DOS/Windows environment, you only need to install the drivers for maximizing disk performance.

DOS DRIVER INSTALLATION

1. Copy the driver file **IDEDRV.SYS** from the Driver diskette to your hard disk root directory, for example:

```
COPY A:\IDEDRV.SYS C:\
```

2. Add the following line to the file **CONFIG.SYS** at the root directory:

```
DEVICE=C:\IDEDRV.SYS
```

3. Reboot your system to enable the new DOS driver for the VL-bus IDE port.

WINDOWS 3.1 DRIVER INSTALLATION

1. Copy the driver file **IDEDRV.386** from the Driver diskette to your current Windows SYSTEM directory, for example:

```
COPY A:\IDEDRV.386 C:\WINDOWS\SYSTEM
```

2. Check the Windows file **SYSTEM.INI** (located under Windows directory, i.e. c:\windows) and make sure that the following lines exist in the **[386Enh]** section as shown below:

```
[386Enh]  
32BitDiskAccess=ON  
device=*int13
```

If these statements do not exist, add them into the **[386Enh]** section. Make sure the **32BitDiskAccess** is set to "ON".

3. Add the following command line into the **[386Enh]** section:

```
device=[drive:] [\path\] IDEDRV.386
```

where the **[drive:]** and **[\path\]** point to the directory that contains the file **IDEDRV.386**, for example:

```
device=c:\windows\system\idedrv.386
```

4. Delete the command line "**device=*wdctrl**" from the **[386Enh]** section if it exists.
5. Restart Windows by typing **WIN**.

APPENDIX A: KEYBOARD SPEED SWITCH

System speed can also be changed through keyboard. There are two available speeds as shown below:

Turbo speed: System runs at full speed.

Set by pressing <+> key once while holding <Ctrl>, <Alt>, and <Shift> keys.



Slow speed: System is slowed down.

Set by pressing <-> key once while holding <Ctrl>, <Alt>, and <Shift> keys.



APPENDIX B: AMI BIOS HARD DISK TYPE

Typ e	Cylind er	Head s	Write Precom p	Landin g Zone	Secto rs	Size
1	306	4	128	305	17	10MB
2	615	4	300	615	17	20MB
3	615	6	300	615	17	31MB
4	940	8	512	940	17	62MB
5	940	6	512	940	17	47MB
6	615	4	65535	615	17	20MB
7	462	8	256	511	17	31MB
8	733	5	65535	733	17	30MB
9	900	15	65535	901	17	112MB
10	820	3	65535	820	17	20MB
11	855	5	65535	855	17	35MB
12	855	7	65535	855	17	50MB
13	306	8	128	319	17	20MB
14	733	7	65535	733	17	43MB
16	612	4	0	663	17	20MB
17	977	5	300	977	17	41MB
18	977	7	65535	977	17	57MB
19	1024	7	512	1023	17	60MB
20	733	5	300	732	17	30MB
21	733	7	300	732	17	43MB
22	733	5	300	733	17	30MB
23	306	4	0	336	17	10MB
24	925	7	0	925	17	54MB
25	925	9	65535	925	17	69MB
26	754	7	754	754	17	44MB
27	754	11	65535	754	17	69MB
28	699	7	256	699	17	41MB
29	823	10	65535	823	17	68MB
30	918	7	918	918	17	53MB
31	1024	11	65535	1024	17	94MB
32	1024	15	65535	1024	17	128MB
33	1024	5	1024	1024	17	43MB
34	612	2	128	612	17	10MB
35	1024	9	65535	1024	17	77MB
36	1024	8	512	1024	17	68MB
37	615	8	128	615	17	41MB
38	987	3	987	987	17	25MB
39	987	7	987	987	17	57MB
40	820	6	820	820	17	41MB
41	977	5	977	977	17	41MB
42	981	5	981	981	17	41MB
43	830	7	512	830	17	48MB
44	830	10	65535	830	17	69MB
45	917	15	65535	918	17	114MB
46	1224	15	65535	1223	17	152MB
47	USER'S	TYPE				

APPENDIX C: MEMORY MAPPING

Address (hex)	Function	Comments
00000000- 0007FFFF	512K System RAM	Cached
00080000- 0009FFFF	128K System RAM	Cached

000A0000-000BFFFF	128K Video RAM	Not Cached
000C0000-000C7FFF	32K Video BIOS	Cached
000C8000-000CFFFF	32K I/O ROM	Not Cached
000D0000-000DFFFF	64K I/O ROM	Not Cached
000E0000-000EFFFF	64K Extended BIOS	Not Cached
000F0000-000FFFFF	64K On-Board BIOS ROM	Cached
00100000-00BFFFFFFF	System Memory (RAM)	Cached
00C00000-00FFFFFFF	System Memory (RAM)	Cached
01000000-BFFFFFFF	System Memory (RAM)	Cached
C0000000-C1FFFFFFF	System Memory (RAM)	Cached
C2000000-FFFDFFFF	System Memory	Cached
FFFE0000-FFFFFFFF	128K On-Board BIOS ROM	Not cached

APPENDIX D: AT I/O ADDRESS MAP

I/O ADDRES S (HEX)	I/O DEVICE
000 - 01F	DMA Controller 1, 8237A-5
020 - 03F	Interrupt Controller 1, 8259A
040 - 05F	System Timer, 8254-2
060 - 06F	8742 Keyboard Controller
070 - 07F	Real-Time Clock/CMOS and NMI Mask
080 - 09F	DMA Page Register, 74LS612
0A0 - 0BF	Interrupt Controller 2, 8259A
0C0 - 0DF	DMA Controller 2, 8237A-5
0F0 - 0FF	CPU's Internal Math Coprocessor
1F0 - 1F8	Fixed Disk Drive Adapter
200 - 207	Game I/O
20C - 20D	Reserved
21F	Reserved
278 - 27F	Parallel Printer Port 2
2B0 - 2DF	Alternate Enhanced Graphic Adapter
2E1	GPIB Adapter 0
2E2 - 2E3	Data Acquisition Adapter 0
2F8 - 2FF	Serial Port 2 (RS-232-C)
300 - 31F	Prototype Card
360 - 363	PC Network (Low Address)
364 - 367	Reserved
368 - 36B	PC Network (High Address)
36C - 36F	Reserved
378 - 37F	Parallel Printer Port 1
380 - 38F	SDLC, Bisynchronous 2
390 - 393	Cluster
3A0 - 3AF	Bisynchronous 1
3B0 - 3BF	Monochrome Display and Printer Adapter
3C0 - 3CF	Enhanced Graphics Adapter
3D0 - 3DF	Color/Graphics Monitor Adapter
3F0 - 3F7	Diskette Drive Controller
3F8 - 3FF	Serial Port 1 (RS-232-C)
6E2 - 6E3	Data Acquisition Adapter 1
790 - 793	Cluster Adapter 1
AE2 - AE3	Data Acquisition Adapter 2
B90 - B93	Cluster Adapter 2
EE2 - EE3	Data Acquisition Adapter 3
1390 - 1393	Cluster Adapter 3
22E1	GPIB Adapter 1
2390 - 2393	Cluster Adapter 4
42E1	GPIB Adapter 2
62E1	GPIB Adapter 3
82E1	GPIB Adapter 4

APPENDIX E: INTERRUPT ASSIGNMENTS

LEVEL	TYPICAL INTERRUPT SOURCE
NMI	Parity, AT Channel Check
IRQ0	Interval Timer 1, Counter 0 Out
IRQ1	Keyboard Controller
IRQ2	Cascade Interrupts from IRQ8 to IRQ15
IRQ3	Serial Port 2
IRQ4	Serial Port 1
IRQ5	Parallel Port 2
IRQ6	Diskette Controller
IRQ7	Parallel Port 1
IRQ8	Real Time Clock
IRQ9	Expansion Bus Pin
IRQ10	Expansion Bus Pin
IRQ11	Expansion Bus Pin
IRQ12	Expansion Bus Pin
IRQ13	Coprocessor Error
IRQ14	Fixed Disk Drive Controller
IRQ15	Expansion Bus Pin

APPENDIX F: SPECIFICATION

PHYSICAL DIMENSION

Length: 13.080" Width: 8.700"

POWER REQUIREMENT

5.25V to 4.75V tolerance on the AT power supply.

10 Amp maximum.

Ripple/Noise 100mV maximum

TEMPERATURE RANGE

Operating: 50⁰ to 104⁰ Fahrenheit (10⁰ to 40⁰ Celsius)

Non-Operating: 50⁰ to 104⁰ Fahrenheit (10⁰ to 40⁰ Celsius)

Shipping: -22⁰ to 140⁰ Fahrenheit (-30⁰ to 60⁰ Celsius)

RELATIVE HUMIDITY (NON-CONDENSING)

Operating: 20% to 80%

Non-Operating: 5% to 90%